


EMY3109Z



ENGINEERING CODE
170AA77

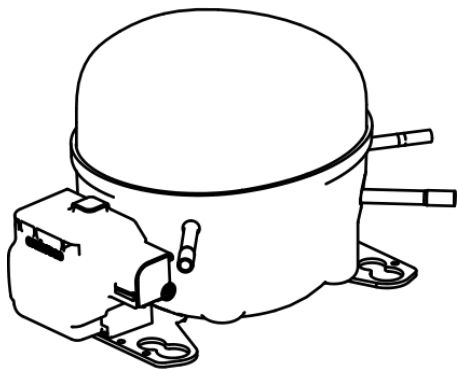

REFRIGERANT
R-134a



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
L/MBP



MOTOR TYPE
RSIR



STANDARD
ASHRAE



COOLING CAPACITY
103 W



EFFICIENCY
1.31 W/W



DATA

GENERAL DATA

Model	EMY3109Z
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	L/MBP
Expansion Device	Capillary Tube
Compressor Cooling	Static/220
HP	1/10
Starting Torque	LST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	20.2 Ω at 25°C
Run Winding Resistance	30.8 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	4 A

MECHANICAL DATA

Displacement	3.97 cm³
Oil Charge	150 ml
Oil Type	ESTER
Oil Viscosity	ISO10
Weight	7.3 Kg

ELECTRICAL COMPONENTS

CSR CSIR BOX	No
Starting Device Type	PTC
Starting Device Description	V230
Overload Protection	AE64FS

EXTERNAL CHARACTERISTICS

Base Plate	SMALL
Tray Holder	YES

Connector	Internal Diameter	Shape	Material
Suction	6.1 mm	SLANTED 42°	COPPER
Discharge	4.94 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 46°	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-134a
Tested Application	LBP
Tested Standard	ASHRAE
Tested Cooling	Static
Tested Voltage	220 V
Tested Frequency	50 Hz
Max Refrigerant Charge	250 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-23.3	103	1.31	78	0.57	1.99
Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.						

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-35	60	1.12	54	0.50	1.16
-30	82	1.31	63	0.52	1.59
-25	111	1.53	73	0.54	2.15
-20	147	1.76	83	0.56	2.85
-15	190	2.02	94	0.60	3.71
-10	241	2.30	105	0.64	4.72
-5	301	2.61	115	0.70	5.91
0	369	2.96	124	0.77	7.28
Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.					

PERFORMANCE CURVE

Condensing Temperature 45°C


Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-35	55	1.01	54	0.51	1.06
-30	75	1.19	63	0.53	1.46
-25	102	1.37	75	0.55	1.99
-20	137	1.56	87	0.58	2.66
-15	179	1.76	101	0.61	3.48
-10	228	1.96	116	0.66	4.46
-5	285	2.18	131	0.72	5.61
0	351	2.40	146	0.79	6.93
Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.					

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-25	92	1.25	73	0.56	1.78
-20	124	1.41	88	0.60	2.41
-15	164	1.58	104	0.64	3.19
-10	211	1.73	122	0.70	4.13
-5	267	1.89	141	0.77	5.24
0	330	2.05	161	0.85	6.51
Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.					

ENVELOPE

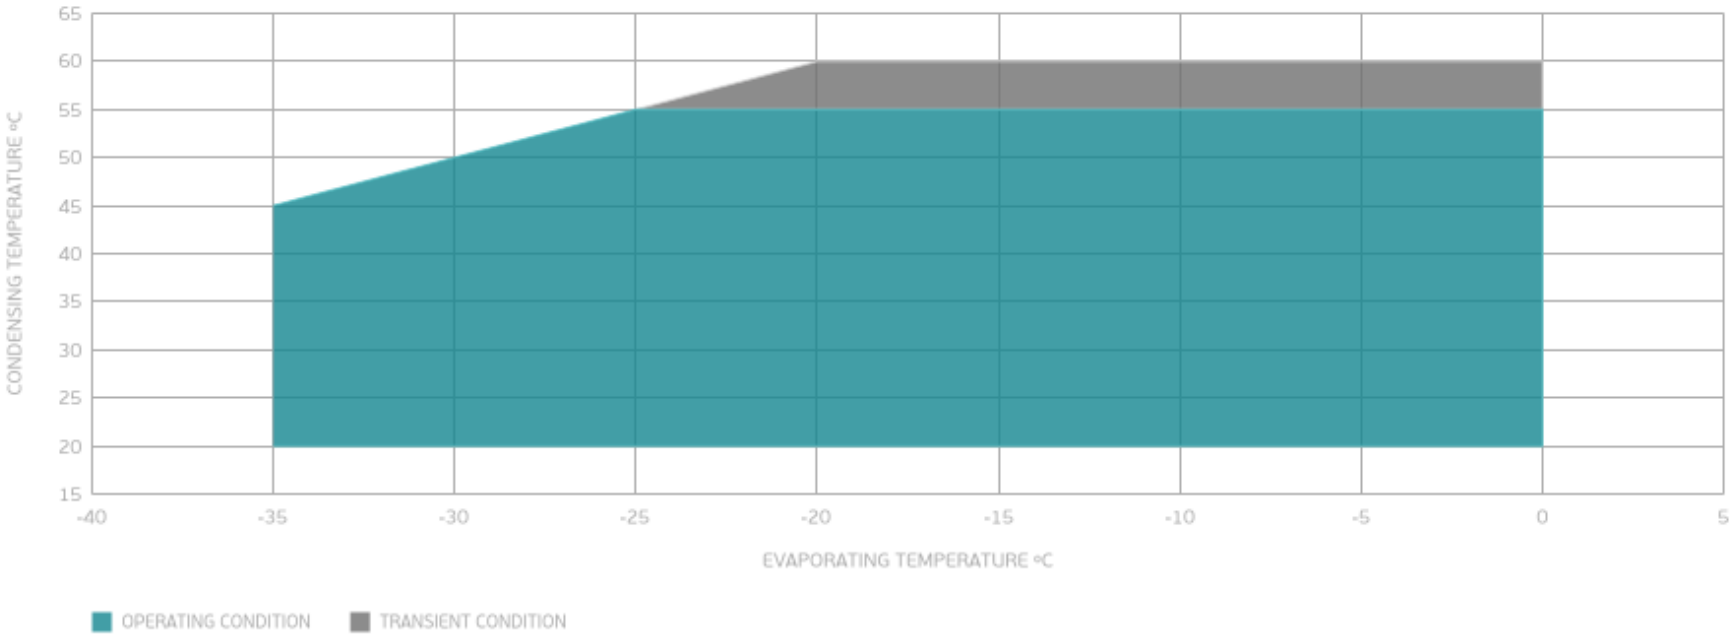

EXTERNAL DIMENSIONS

