


Adjustable Torque Wrench

- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque $\pm 4\%$ (CW)
- CW/CCW Direction

5.000
Precision
in use

$\pm 4\%$
Tolerance

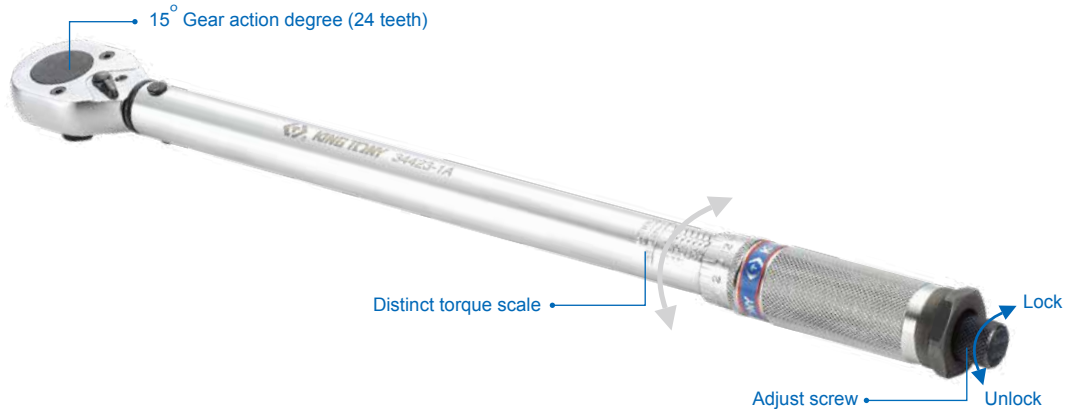

1/4" 34223

KT NO	Square drive	Torque range N.m	Incr	Torque range kgf.m / kgf.cm	Incr	Overall length mm			DK
34223-1A	1/4"	5~25 N.m	0.1 N.m	51~255 kgf.cm	1 kgf.cm	280	595	1 / 12	34223-1DK1
34223-1B	1/4"	55~250 in.lb	1.5 in.lb	63~288 kgf.cm	1.13 kgf.cm	280	595	1 / 12	34223-1DK1
34223-1C	1/4"	55~250 in.lb	1 in.lb	6.2~28.2 N.m	0.17 N.m	280	595	1 / 12	34223-1DK1

3/8" 34323

KT NO	Square drive	Torque range N.m	Incr	Torque range kgf.m / kgf.cm	Incr	Overall length mm			DK
34323-1A	3/8"	5~25 N.m	0.1 N.m	51~255 kgf.cm	1 kgf.cm	280	595	1 / 12	34323-1DK1
34323-2A	3/8"	20~110 N.m	1 N.m	2.04~11.22 kgf.m	0.1 kgf.m	370	820	1 / 12	34323-2DK1
34323-1B	3/8"	55~250 in.lb	1.5 in.lb	63~288 kgf.cm	1.13 kgf.cm	280	595	1 / 12	34323-1DK1
34323-2B	3/8"	15~80 ft.lb	0.5 ft.lb	2.1~11.10 kgf.m	0.07 kgf.m	370	820	1 / 12	34323-2DK1
34323-1C	3/8"	55~250 in.lb	1 in.lb	6.2~28.2 N.m	0.17 N.m	280	595	1 / 12	34323-1DK1
34323-2C	3/8"	15~80 ft.lb	0.5 ft.lb	20.3~108.5 N.m	0.68 N.m	370	820	1 / 12	34323-2DK1

1/2" 34423

KT NO	Square drive	Torque range N.m	Incr	Torque range kgf.m / kgf.cm	Incr	Overall length mm			DK
34423-1A	1/2"	42~210 N.m	1 N.m	4.3~21.4 kgf.m	0.41 kgf.m	450	1340	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx
34423-2A	1/2"	70~340 N.m	3 N.m	7.1~34.7 kgf.m	0.27 kgf.m	570	2400	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx 34423-3DK(24T) -series NO. after 1309230001
34423-1B	1/2"	30~150 ft.lb	1 ft.lb	4.2~20.8 kgf.m	0.14 kgf.m	450	1340	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx
34423-2B	1/2"	50~250 ft.lb	2 ft.lb	6.9~34.6 kgf.m	0.27 kgf.m	570	2400	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx 34423-3DK(24T) -series NO. after 1309230001
34423-1C	1/2"	30~150 ft.lb	1 ft.lb	40.7~203.4 N.m	1.35 N.m	450	1658	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx
34423-2C	1/2"	50~250 ft.lb	2 ft.lb	67.8~339 N.m	2.71 N.m	570	2400	1 / 12	34423-1DK1(24T) -series NO. before 090923xxxx 34423-3DK(24T) -series NO. after 1309230001