

## Specifications

Model	HS105
Power Input	12V / 1 A
Max Power Consumption	11 W
Ethernet	5 × 2.5 Gbps RJ45 Ports
Switching Capacity	25 Gbps
Throughput	18.66 Mpps
MAC Address Table	8 K
Jumbo Frame	15 KB
Transfer Mode	Store and forward
MTBF	100000 hour
Working Temperature	0~40°C
Storage Temperature	-40~75°C
Working Humidity	0%~100%, non-condensing

## FCC Statements:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## EU declaration of conformity

Cudy hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC and 2011/65/EU. The original EU declaration of conformity may be found at <http://www.cudy.com/>

## Support

For technical support, the user guide and more information, please visit: <http://www.cudy.com/support>  
support@cudy.com

RoHS



# Quick Installation Guide

## NEED TECH HELP?



Website:  
[www.cudy.com](http://www.cudy.com)



Email:  
[support@cudy.com](mailto:support@cudy.com)

Driver & Manual:

### Support

For technical support, the user guide and more information, please visit:  
<https://www.cudy.com/support>


18.03.25, 11:07

Cudy HS105 Multi-Gigabit Switch: AI Chat & PDF Access | Manualzz

Storage Humidity	10%~95%, non-condensin
Product Size	119x85x28mm



## Connection

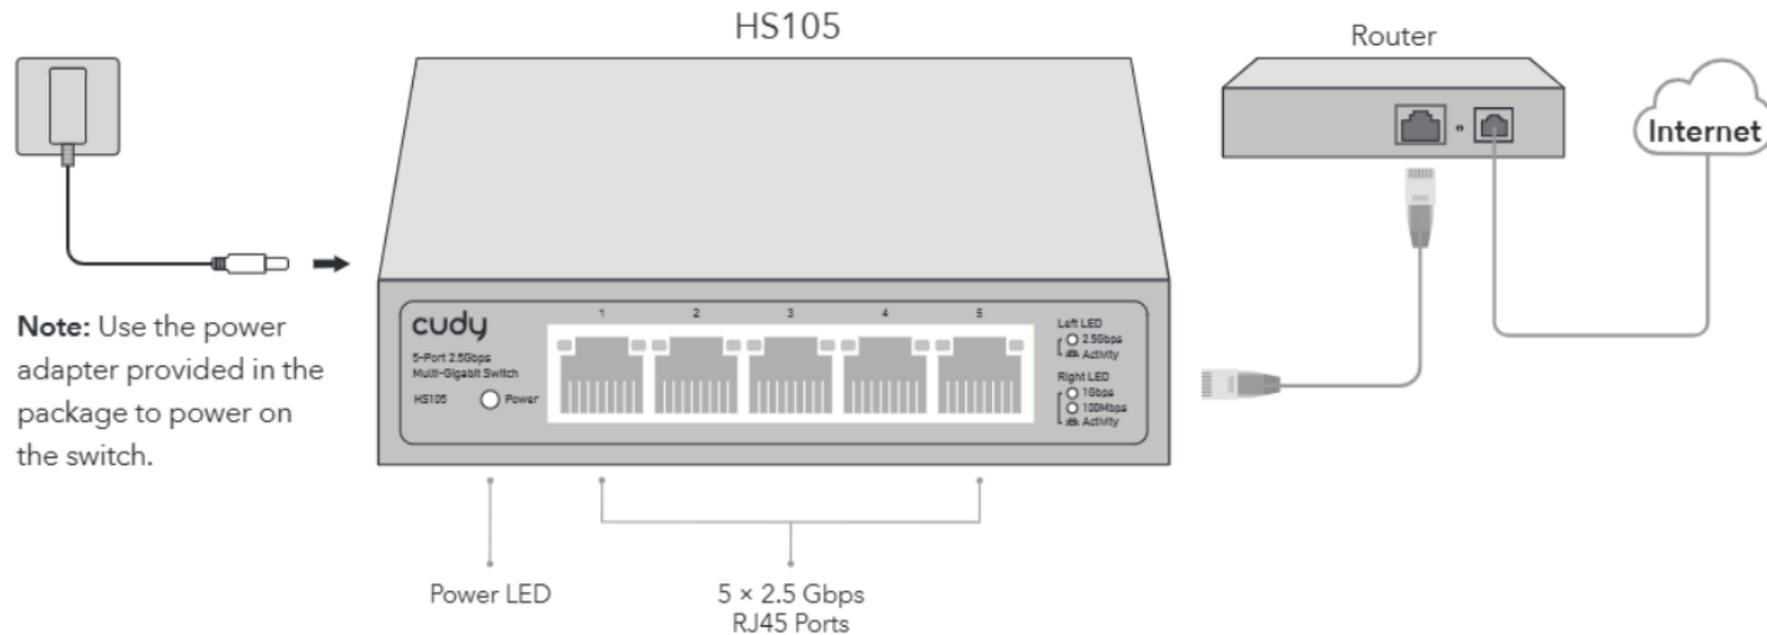

## LED

Name	Indication
Power	On: Power on
	Off: No Power
Left LED (2.5 Gbps Rate)	Steady on: Connected
	Flashing: Connected, with active data transmission
Right LED (1 Gbps Rate)	Steady on: Connected
	Flashing: Connected, with active data transmission
Right LED (100 Mbps Rate)	Steady on: Connected
	Flashing: Connected, with active data transmission

