
Result of the Bansbach gas spring configuration:

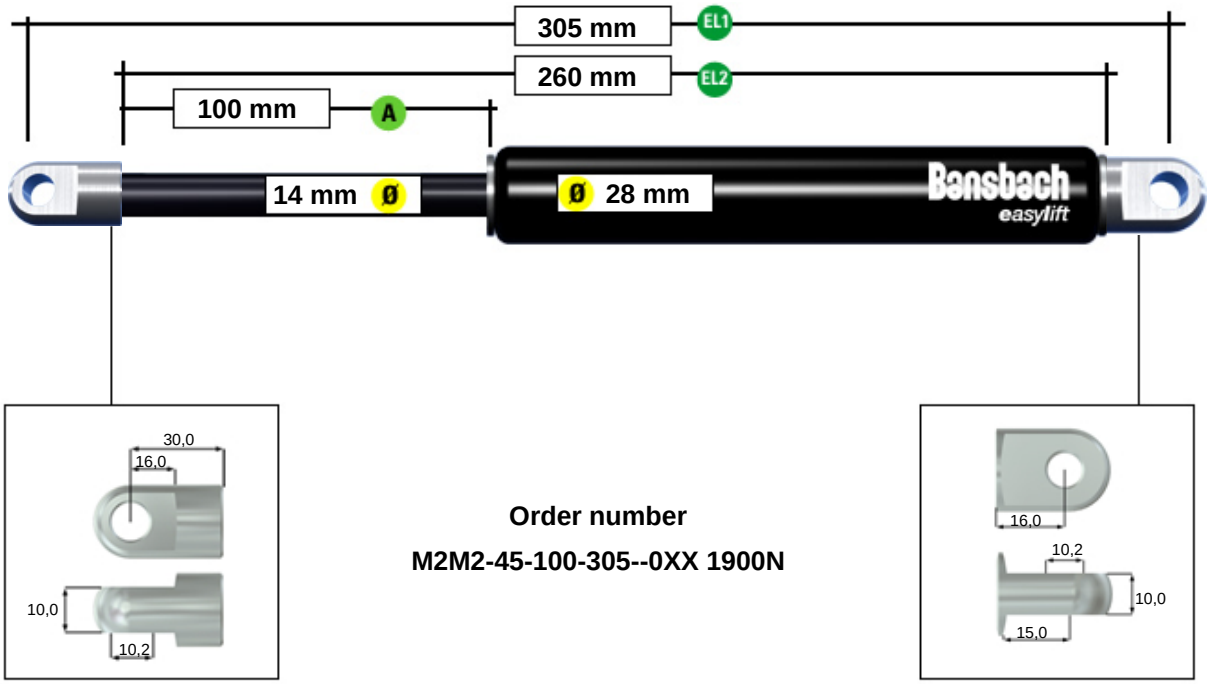

Order number

M2M2-45-100-305--0XX 1900N

M2	M2	-	4	5	100	305	0XX	1900

05.03.2025

Gas spring

Extension-force:	**1900 N**
Stroke:	**100 mm**
Diameter:	**14/28**
Model:	**Standard**
Push-out speed/damping:	**normal speed, normal end damping**
Connecting part piston rod:	**Hinge eyes (M2)**
Connecting part cylinder:	**Hinge eyes (M2)**

Extended length EL2:	**260 mm**
Extended length EL1:	**305 mm**

The total length is calculated when the piston rod is extended. Length tolerance: +- 2mm. The shown length is the minimum length.

Chosen brackets

suitable for the selected connecting parts mentioned above

Bracket piston rod side:	**-**
Bracket cylinder side:	**-**

Number of pieces:

Contact

Company:	Country:
Name:	Fon:
Street:	E-Mail:
Zip-Code/City:	
Message	

Bansbach easylift GmbH
Barbarossastraße 8
D-73547 Lorch

Fon. +49(0) 7172/9107-0
Fax +49(0) 7172/9107-44

info@bansbach.de
www.bansbach.de