

ROTATOR FHR 6FD2

STATIC LOAD
60 kN

DYNAMIC LOAD
30 kN

TORQUE at 25MPa
1850 Nm

OILFLOW
25 l/min

WEIGHT
47 kg

OPPOSITE HOSE CONNECTION

DOUBLE BEARING

FORGED STEEL

Grapple open
G1/2" Max 250 bar

Grapple close
G1/2" Max 300 bar

Rotator designed for intensive professional use and extended long lifetime

Grapple open
G1/2"

Rotator frame L80 ø35


Rotate left/right
G1/2" Max 250 bar

Rotator with two bearings to withstand compression and stretching forces

Grapple close
G1/2"

Optional open/close channels

Robust and shock resistant steel flange for fitting the grapple in standard pattern with 6xM16 bolts

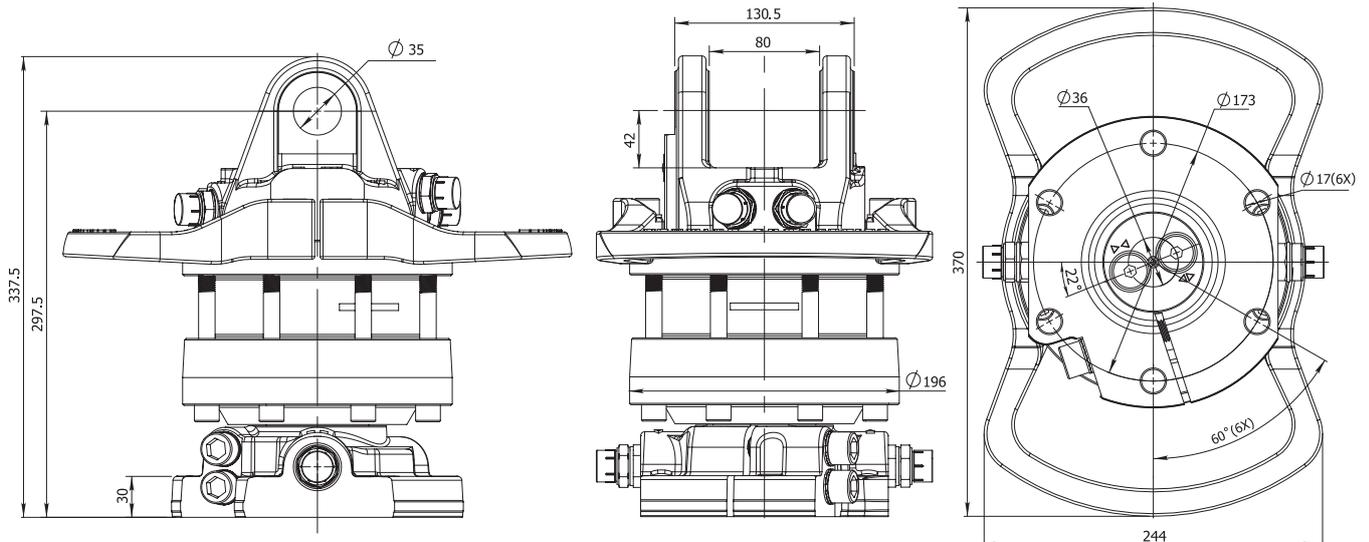

FORESTRY

AGRICULTURE

CONSTRUCTION

GENERAL CARGO

RECYCLING