

## HIGH FREQUENCY SOLAR INVERTER PV1800 PRO Series


2~3.2KW | 400V | WiFi

PV1800 PRO is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1800 PRO Series can run without battery. The Maximum PV array open circuit voltage can reach 400V and MPPT voltage is 60~320Vdc, which Can help customers make full use of solar energy.




- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- MAX PV Array Open Circuit Voltage: 400V
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- WIFI remote monitoring (Built in wifi module and antenna)
- PV/ AC activation function
- BMS communication function

### Back panel description

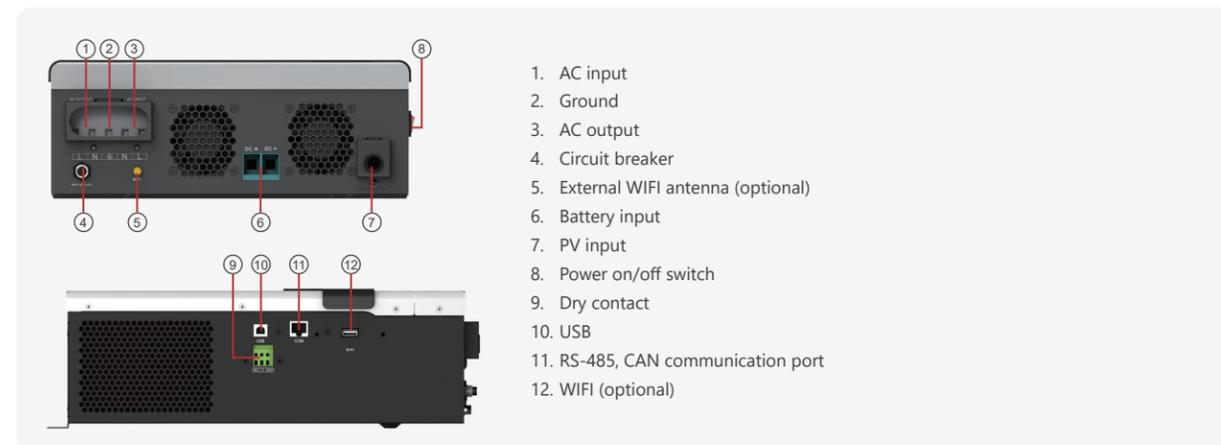

### Solar system connection

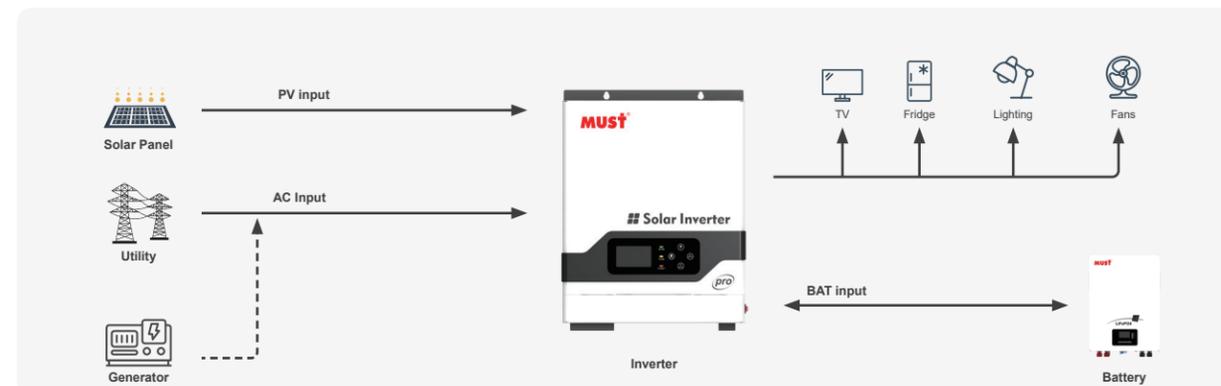

| MODEL  | PV18-2024 PRO   | PV18-3224 PRO  |
|--|---|----------------|
| Nominal Battery System Voltage   | 24VDC   |                |
| <b>INVERTER OUTPUT</b>   |   |                |
| Rated Power  | 2000VA / 2000W  | 3200VA / 3200W |
| Surge Power  | 4000W   | 6400W          |
| Waveform   | Pure sine wave  |                |
| AC Voltage Regulation (Batt.Mode)  | 230VAC±5%(Setting)  |                |
| Inverter Efficiency(Peak)  | 90%   |                |
| Transfer Time  | 10ms (UPS / VDE4105) / 20ms (APL)                               |                |
| <b>AC INPUT</b>  |   |                |
| Voltage  | 230VAC±5%   |                |
| Selectable Voltage Range   | 170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VED4105)          |                |
| Frequency Range  | 50Hz / 60Hz(Auto sensing)                                       |                |
| <b>BATTERY</b>   |   |                |
| Normal voltage   | 24VDC   |                |
| Floating Charge Voltage  | 27.4VDC   |                |
| Overcharge Protection  | 30VDC   |                |
| <b>SOLAR CHARGER &amp; AC CHARGER</b>  |   |                |
| Maximum PV Array Open Circuit Voltage  | 400VDC  |                |
| Maximum PV input current   | 18A   |                |
| Charging Algorithm   | 3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li) |                |
| Maximum PV Array Power   | 3000W   | 4000W          |
| PV Array MPPT Voltage Range  | 60~320 VDC  |                |
| Maximum Solar Charge Current   | 80A   | 100A           |
| Maximum AC Charge Current  | 40A   | 60A            |
| Maximum Charge Current   | 80A   | 100A           |
| <b>MECHANICAL SPECIFICATIONS</b>   |   |                |
| Machine Dimension (W*H*D)(mm)  | 290*367*111   |                |
| Package Dimension (W*H*D)(mm)  | /   |                |
| N.W (kg)   | /   |                |
| G.W (kg)   | /   |                |
| <b>OTHER</b>   |   |                |
| Humidity   | 5% to 95% Relative humidity (Non-condensing)                    |                |
| Operating Temperature  | 0°C~50°C  |                |
| Storage Temperature  | -15°C~60°C  |                |
| Warranty   | 2 year  |                |
| <b>MECHANICAL SPECIFICATIONS</b>   |   |                |
| CE-EMC+LVD (EN6100-6-3:2007, EN6100-6-1:2017+EN IEC62109-1:2010, EN IEC62109-2:2011) |   |                |

\*The technical specifications of this document are subject to change without any notice