

Pure Sine wave High Frequency solar Inverter(450V)
PV1800 PRO Series (3KW-5.5KW)




Features

- Pure sine wave output
- Smart LCD setting (Working modes, Charge Current, Charge Voltage, etc).
- Built-in MPPT solar charge controller
- MAX PV Array Open Circuit Voltage: 450V
- Can provide the power to the load without battery
- Combining solar system, AC utility, and battery power source to supply continuous power
- Overload, short circuit and Deep discharge protection
- Cold start function
- Support USB, RS485 monitoring function
- Parallel operation with up to 3 units
- WIFI remote monitoring (optional)

Introduction

PV1800 PRO is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support in portable size. PV1800 PRO Series can run without battery. The Maximum PV array open circuit voltage can reach 450V and MPPT voltage is 150~430Vdc, which Can help customers make full use of solar energy.

Back panel printing description

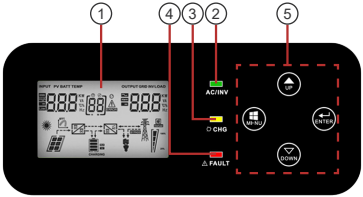


1. LCD Display

2. Status Indicator


3. Charging Indicator

4. Fault Indicator

5. Function Buttons



[PV1800 PRO 3K]



[PV1800 PRO 5K]

6. AC Input

7. AC Output

8. FAN

9. PV Input

10.Power On/Off Switch

11. Battery Input

12.Circuit breaker
- 13.Dry Contact

14.USB

15.RS-485/CAN Communication port

16.USB WiFi

17.Parallel switch (only for parallel model)

18.Parallel communication port (only for parallel model)

Specification

MODEL		PV18-3024 PRO		PV18-3524 PRO	PV18-5248 PRO		PV18-5548 PRO
Nominal Battery System Voltage		24VDC			48VDC		
INVERTER OUTPUT	Rated Power	3000VA / 3000W		3500VA / 3500W	5200VA / 5200W		5500VA / 5500W
	Surge Power	6000W		7000W	10400W		11000W
	Waveform	Pure sine wave					
	AC Voltage Regulation (Batt.Mode)	230VAC±5%(Setting)					
	Inverter Efficiency(Peak)	90%					
	Transfer Time	10ms (UPS / VDE4105) / 20ms (APL)					
AC INPUT	Voltage	230VAC±5%					
	Selectable Voltage Range	170~280VAC(UPS) / 90~280VAC(APL) / 184~253VAC(VED4105)					
	Frequency Range	50Hz / 60Hz(Auto sensing)					
BATTERY	Normal voltage	24VDC			48VDC		
	Floating Charge Voltage	27.4VDC			54.8VDC		
	Overcharge Protection	30VDC			60VDC		
SOLAR CHARGER & AC CHARGER	Maximum PV Array Open Circuit Voltage	450VDC					
	Charging Algorithm	3-Step (Flooded Battery, AGM / GEL / LEAD Battery), 4-Step (Li)					
	Maximum PV Array Power	4000W	4000W	5000W	6000W	6000W	
	PV Array MPPT Voltage Range	150~430 VDC					
	Maximum Solar Charge Current	80A	100A	100A	80A	100A	120A
	Maximum AC Charge Current	60A	80A	80A	60A	80A	100A
	Maximum Charge Current	80A	100A	100A	80A	100A	120A
MECHANICAL SPECIFICATIONS	Machine Dimensions (W*H*D)(mm)	322*486*134		322*486*134	309*505*147		309*505*147
	Package Dimensions (W*H*D)(mm)	426*560*260.5		426*560*260.5	375*655*269		375*655*269
	Net Weight(kg)	8		10	14		14.4
	Gross Weight(kg)	9.5		11.5	16.4		16.8
OTHER	Humidity	5% to 95% Relative humidity (Non-condensing)					
	Operating Temperature	0°C~50°C					
	Storage Temperature	-15°C ~60°C					