


Technical Data Sheet

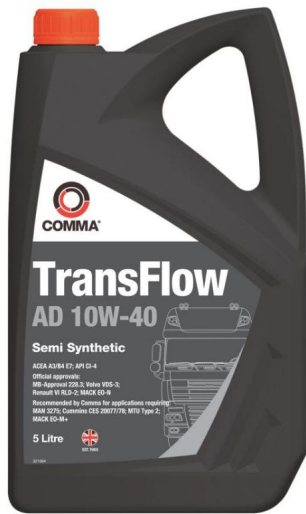

Typical Inspection Data:

Density @ 20°C	0.865 g/cm ³
Viscosity @ 100°C (cSt)	14.4 cSt
Viscosity @ 40°C	95
Viscosity Index	150
Viscosity CCS @ -25°C	5400 cP
T.B.N (mg KOH/g)	10.1 mg KOH/g
Sulphated Ash Mass (%)	1.4 %
Zinc (%)	0.11 %
Colour	Dark Brown
Phosphorus (%)	0.12 %
Flash Point (°C)	230 °C
Pour Point (°C)	-33 °C
Calcium (%)	0.38 %

TRANSFLOW AD 10W-40 Semi Synthetic

Official Approvals:

MB-Approval 228.3, Volvo VDS-3, Renault RLD-2, Mack EO-N

Recommended by Comma for applications requiring any of the following:

ACEA A3/B4 E7, API CI-4, MAN 3275, Cummins CES 20076/20078, MTU Type 2, Mack EO-M+

Product Features:

- Semi-synthetic, 10W-40 oil, suitable for high performance diesel engines including turbo charged and naturally aspirated.
- Ideal for mixed fleet-trucks.
- To ensure correct oil selection check Comma's latest application guide in store or online at CommaOil.com

Handling:

- Avoid extremes of temperature.
- Product in cardboard cartons must be stored under cover and away from damp conditions
- Barrels should be stored under cover if possible
- If barrels must be stored outside then lay them on their side to prevent water collecting around the bungs

Shelf life:

- 5 years from date of manufacture
- Manufacture date can be identified from an eight digit code printed on the bottle. YYYY.MM.DD

UPDATED: 06.05.2025