





24.8 - 247.2 kW



Modello	Type	LMC6F		3511	3512		3521	3522		3531	3532		3541	3542
Potenza	Capacity	kW (ΔT 15K)		53,4	61,8		106,8	123,6		160,2	185,4		213,6	247,2
Portata d'aria	Air quantity	m³/h		15500	14700		31000	29400		46500	44100		62000	58800
Assorbimento motori	400V - 3PH - 50Hz	W		2250	2250		4500	4500		6750	6750		9000	9000
Motor power consumption		A		5,0	5,0		10,0	10,0		15,0	15,0		20,0	20,0
Livello pressione sonora	Sound pressure level	dB (A) (total)		60	60		63	63		64	64		65	65
Attacchi	Cinnections	mm		28/28	35/28		35/28	42/35		54/42	42/35		54/42	42/35
Circuiti	Circuits	n°		37	50		75	100		150	100		150	100
Modello	Type	LMC6N	3513	3514	3515	3523	3524	3525	3533	3534	3535	3543	3544	3545
Potenza	Capacity	kW (ΔT 15K)	35,7	44,3	49,3	71,4	88,6	98,6	107,1	132,9	147,9	142,8	177,2	197,2
Portata d'aria	Air quantity	m³/h	11600	11000	10500	23200	22000	21000	34800	33000	31500	46400	44000	42000
Assorbimento motori	400V - 3PH - 50Hz	W	785	815	815	1570	1630	1630	2355	2445	2355	3140	3260	3260
Motor power consumption		A	1,6	1,6	1,6	3,2	3,2	3,2	4,8	4,8	4,8	6,4	6,4	6,4
Livello pressione sonora	Sound pressure level	dB (A) (total)	51	51	51	54	54	54	55	55	55	56	56	56
Attacchi	Cinnections	mm	22/22	28/28	35/28	35/28	35/28	42/35	42/35	35/28	42/35	42/35	54/42	42/35
Circuiti	Circuits	n°	25	37	50	50	75	100	100	75	100	100	150	100
Modello	Type	LMC6S	3516	3517		3526	3527		3536	3537		3546	3547	
Potenza	Capacity	kW (ΔT 15K)	29,8	34,7		59,6	69,4		89,4	104,1		119,2	138,8	
Portata d'aria	Air quantity	m³/h	8200	7700		16400	15400		24600	23100		32800	30800	
Assorbimento motori	230V - 1PH - 50Hz	W	315	315		630	630		945	945		1260	1260	
Motor power consumption		A	1,8	1,8		3,6	3,6		5,4	5,4		7,2	7,2	
Livello pressione sonora	Sound pressure level	dB (A) (total)	41	41		44	44		45	45		46	46	
Attacchi	Cinnections	mm	22/22	22/22		35/28	35/28		35/28	35/28		42/35	35/28	
Circuiti	Circuits	n°	25	25		50	75		50	75		100	75	
Modello	Type	LMC6R	3518	3519		3528	3529		3538	3539		3548	3549	
Potenza	Capacity	kW (ΔT 15K)	24,8	27,8		49,6	55,6		74,4	83,4		99,2	111,2	
Portata d'aria	Air quantity	m³/h	6200	5700		12400	11400		18600	17100		24800	22800	
Assorbimento motori	230V - 1PH - 50Hz	W	154	154		308	308		462	462		616	616	
Motor power consumption		A	1,2	1,2		2,4	2,4		3,6	3,6		4,8	4,8	
Livello pressione sonora	Sound pressure level	dB (A) (total)	35	35		38	38		39	39		40	40	
Attacchi	Cinnections	mm	22/22	22/22		35/28	28/28		35/28	35/28		35/28	35/28	
Circuiti	Circuits	n°	17	25		50	37		50	75		50	75	
DATI COMUNI / COMMON DATA														
Elettroventilatori	Fans	Ø 630 mm x n°	1 o	1 o	1 o	2 o	2 o	2 o	3 o	3 o	3 o	4 o	4 o	4 o
Superficie esterna	TURBOCOIL External surface	m²	45,4	68	90,7	90,7	136,1	181,4	136,1	204,1	272,1	181,4	272,2	362,9
Superficie interna		Internal surface	m²	3,8	5,7	7,6	7,6	11,3	15,1	11,3	17,0	22,7	15,1	22,7
Volume circuito	Circuit volume	dm³	3,1	4,8	6,4	6,2	8,6	11,7	9,2	12,1	16,4	11,7	17,7	16,4
Peso	Weight	kg (V)	84	90	97	148	159	172	210	228	246	272	297	321

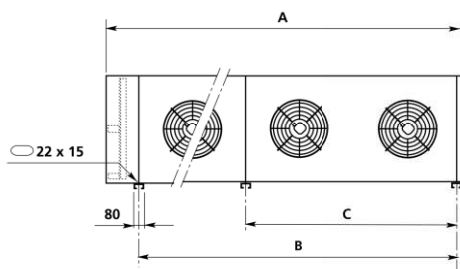

Dimensioni - Dimensions

Installazione verticale
Vertical installation
(V)

	1 o	2 o	3 o	4 o
A mm	1588	2803	4018	5233
B mm	1215	2430	3645	4860
C mm	-	-	-	2430

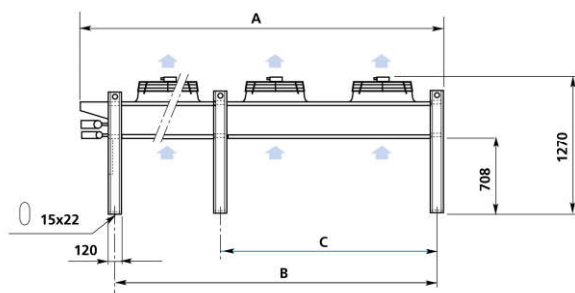

Dimensioni - Dimensions

Installazione orizzontale
Horizontal installation
(H)

	1 o	2 o	3 o	4 o
A mm	1608	2823	4038	5253
B mm	1215	2430	3645	4860
C mm	-	-	-	2430