


# INTELLIGENT TOILET


INSTRUCTION  
MANUAL

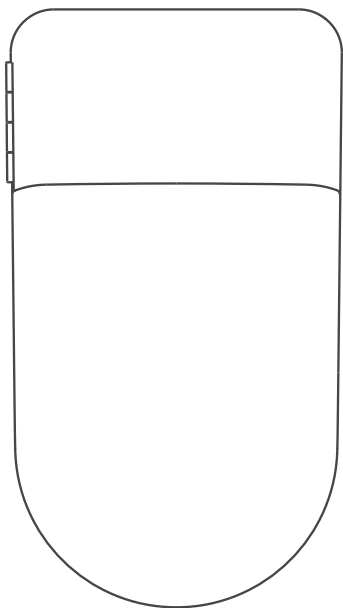


---

Please read this instruction manual carefully before ensuring safe use


# Item List(Confirm that all below items are inside the box)

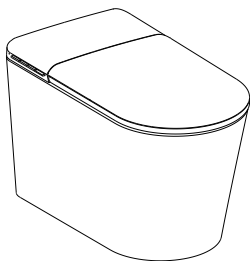


① Intelligent toilet(1 set)




② Remote control set(1 set)  
(holder 1 pc,2 battery)



⑥ Touch switch  
(Optional item)



③ T-valve



⑦ Pre-filter  
(Optional item)



④ Wax Ring



⑧ Bubble liquid  
(Optional item)





⑤ Backup battery set



⑨ User Manual


\* Illustrations above are for references only.

# Parts Information

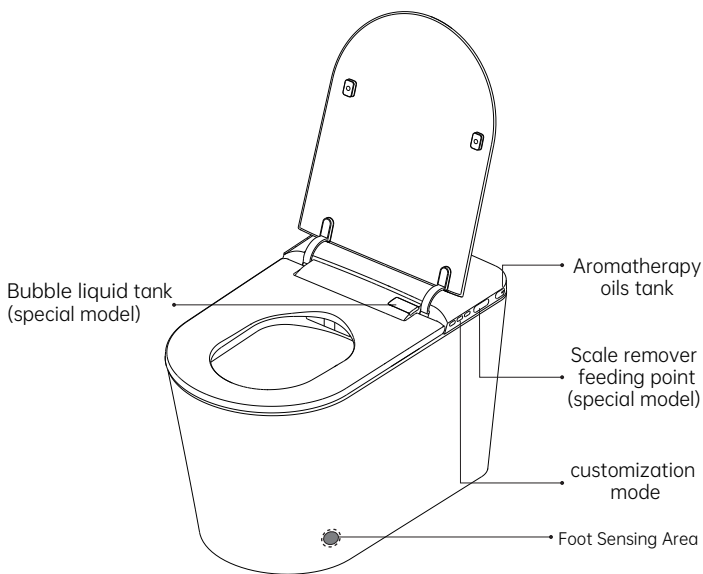
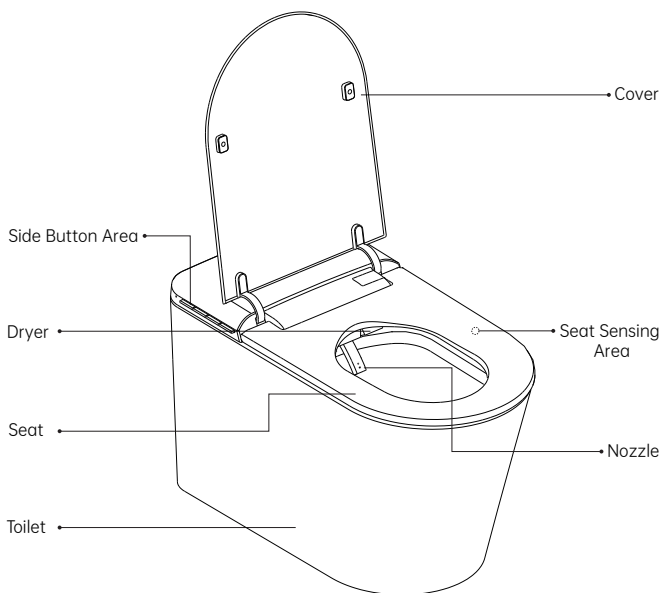


\* Illustrations above are for references only.  
Actual objects may look different in person.

## Side Button Area

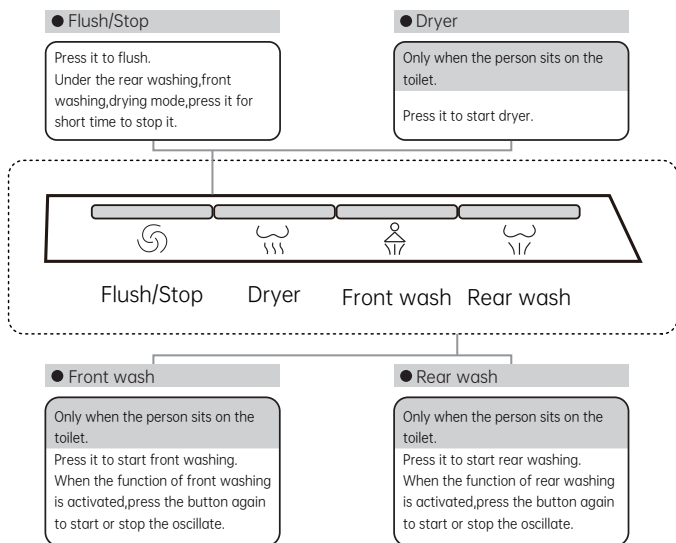


## Customization Mode

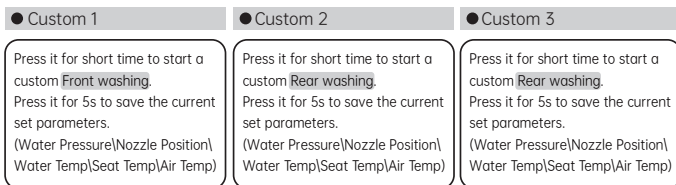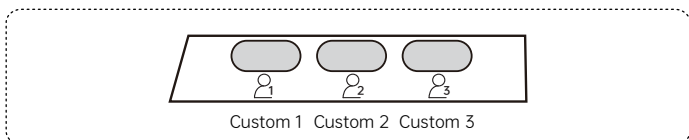

## Cleaning Scale (optional configuration)

1. Open the Scale remover feeding point on the right side of toilet, add the scale remover, close the close the feeding point.
2. Press the "Flush/Stop" button on the left side of toilet for 5s to turn standby mode on.
3. Press the "Custom 3" button on the right side of toilet for 5s to turn Scale Cleaning mode on.
4. The toilet will go to standard mode automatically after completion of descaling.

# Remote Control


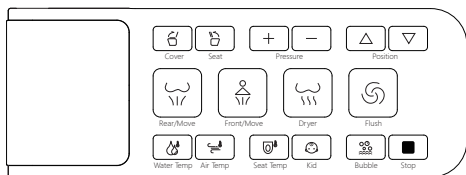


Remote Control (Standard)







Touch Switch (Optional item)

## Remote Control Pairing



## Touch Switch Pairing




\* If Remote Control or Touch Switch is not working, please re-pairing the device.

Remote Control		
Keys	Press	Press it for 5s
Cover	Open/Close the cover	Turn Auto Open & Close on/off
Seat	Open/Close the seat	Turn foot sensor on/off
+	Increase water pressure during cleansing	
-	Decrease water pressure during cleansing	
△	Move forward the nozzle	Improve the sensitivity of sensing
▽	Move back the nozzle	Reduce the sensitivity of sensing
Rear/Move	Start rear wash	
Front/Move	Start front wash	Turn Auto Per-wetting on/off
Dryer	Start dryer	<b>Enter pairing mode</b>
Flush	Start flushing	Turn Auto-Flush on/off
Water Temp	Adjust water temperature	Turn on/off the light
Air Temp	Adjust drying temperature	Turn Night mode on/off
Seat Temp	Adjust seat temperature	Turn Energy-efficient mode on/off
Kid	Start the cleaning of children	Turn Nozzle Self-cleaning on/off
Bubble	Make bubbles	Turn Auto-Bubble mode on/off
Stop	Stop the current working	Turn standby mode on/off

\* If some of these features cannot be enabled, check whether the optional configuration includes this feature.

# Specification

Rated voltage		220V~,50Hz or 110V,60Hz
Rated power		1050W or 1400W
Power cord length		About 1.5m
Drainage way		Siphon
Clean	Rear Wash	Water flow:Max rear wash shall be no less than 450mL/min
	Front Wash	Water flow:Max rear wash shall be no less than 450mL/min
	Water temperature	OFF/ 35-40°C(4 levels)
	Max instantaneous power	1600W
	Safety device	Thermostat, Thermal fuse, Temperature sensor
Heated Seat	Seat temperature	OFF/ 35-39°C(4 levels)
	Max instantaneous power	45W
	Safety device	Thermostat, Thermal fuse, Temperature sensor
	Warm air temperature	OFF/ 35-39°C(4 levels)
Dryer	Max instantaneous power	250W
	Safety device	Thermal fuse, Bimetal thermostat
Water supply pressure		Min inlet water pressure 0.07MPa (dynamic) Max inlet water pressure 0.80MPa
Ambient temperature		IPX4
Inlet water temperature		5-35°C
Ambient temperature		0-40°C

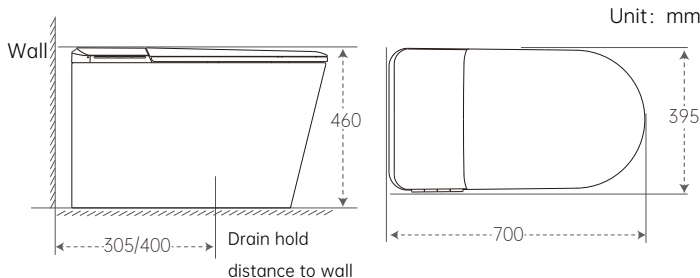

## Before you Install

1. Confirm dimensions of product with installation space.
2. Check your installation conditions.  
(water supply, water pressure, electrical circuit)
3. Pay attention to other objects.
  - Other objects (door, cabinet, etc) may affect the installation or sensing functions.