


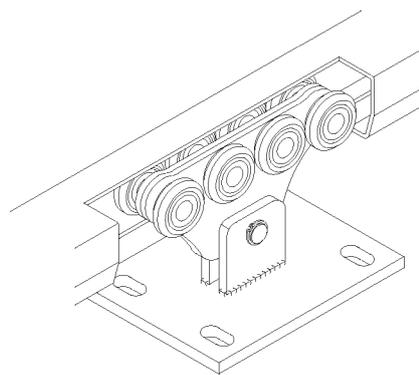


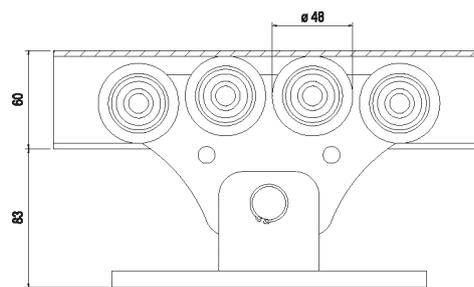



- I Carrello "Basic" per cancelli autoportanti
- UK "Basic" carriage for cantilever gates
- D "Basic" Rollenapparat für freitragende Schiebetore
- F Chariot "Basic" pour portails autoportants
- E Carro "Basic" para puertas autoportantes
- RUS Тележка для консольных сдвижных ворот базовая

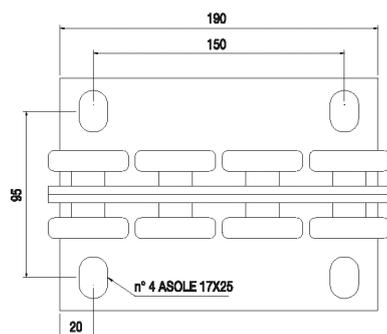

Articolo - Article	L1	Peso max cancello Gate max weight	Abbinabile Combining	
Riferimento - Reference	Max ML			N°
CA 4 RPS	LT 00 50 80	3 - 5	450 kg	GIPI 4 RP / RPZ 2 9,58



Peso max cancello Gate max weight	L1 (mt)	L2 (mt)	L4 (mt)	L5 (mt)	LT (mt)	H (mt)	E (mt)	A (mt)	B (mt)	C (mt)	Portata max carrello Carriage strength	Fondazione Armatura	
450 kg	3,0	0,9	1,66	0,20	4,7	1,7	0,19	1,8	0,6	0,5	900 kg	4 Ø 12	4 Ø 12
450 kg	4,0	1,2	1,96	0,20	6,0	1,7	0,19	2	0,6	0,5	900 kg	4 Ø 12	4 Ø 12
450 kg	5,0	1,5	2,26	0,20	7,3	1,7	0,19	2,3	0,8	0,5	900 kg	4 Ø 12	4 Ø 12
450 kg	6,0	1,8	2,56	0,20	8,6	1,7	0,19	2,6	0,8	0,5	900 kg	4 Ø 12	4 Ø 12

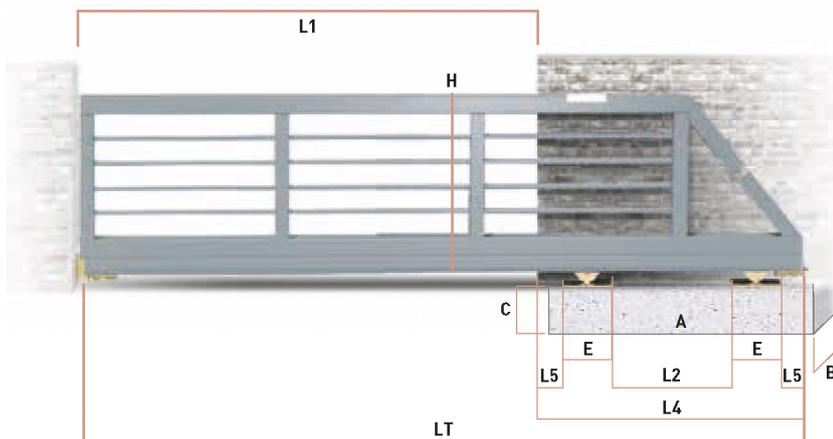

Accessori Abbinabili / Combining accessories

CA 4 RPS	x2	41 B	x2
50 B	x2	GIPI4RP/Z	*
* Lunghezza guida variabile Variable track length			
2RP P - 4RP P	x2	Gloeck	x1

LT = L1+L4

L2 = 30% di L1

L4 = L2+(E+L5) x2