


NT6222GK



ENGINEERING CODE
922CA09

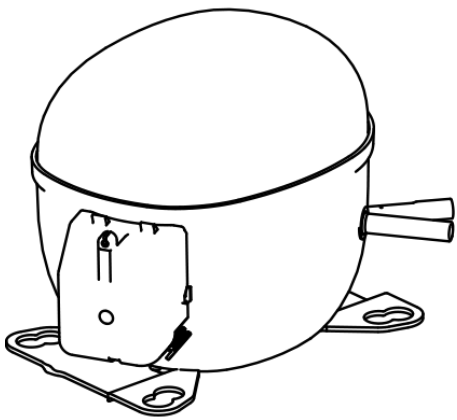

REFRIGERANT
R-404A



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
MBP



MOTOR TYPE
CSIR



STANDARD
EN12900



COOLING CAPACITY
1299 W



EFFICIENCY
1.51 W/W

DATA

GENERAL DATA

Model	NT6222GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	9.0 Ω at 25°C
Run Winding Resistance	2.3 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	30 A

MECHANICAL DATA

Displacement	17.39 cm³
Oil Charge	450 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	17.2 Kg

ELECTRICAL COMPONENTS

Start Capacitor	130-156 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRPH-60-59*
Overload Protection	T0748/G9

EXTERNAL CHARACTERISTICS

Base Plate	UNI
Tray Holder	NO

Connector	Internal Diameter	Shape	Material
Suction	12.7 mm	ROTOLOCK(EX. THR. 1"-14UNS-2A)	STEEL
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	MBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Tested Frequency	50 Hz
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
45	-10	1299	1.51	863	-	39.01
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.						

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1017	1.56	652	-	26.35
-15	1266	1.78	713	-	33.11
-10	1577	2.03	775	-	41.57
-5	1952	2.35	831	-	51.97
0	2395	2.75	872	-	64.57
5	2907	3.26	891	-	79.63
10	3491	3.98	878	-	97.38
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE

Condensing Temperature 45°C


Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	846	1.17	721	-	24.94
-15	1047	1.33	786	-	31.16
-10	1299	1.51	863	-	39.01
-5	1604	1.70	943	-	48.74
0	1965	1.93	1017	-	60.59
5	2384	2.21	1077	-	74.83
10	2864	2.57	1116	-	91.70
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	1007	1.10	919	-	35.67
-5	1242	1.23	1012	-	44.63
0	1520	1.37	1109	-	55.65
5	1846	1.54	1202	-	68.97
10	2221	1.73	1283	-	84.86
Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.					

ENVELOPE

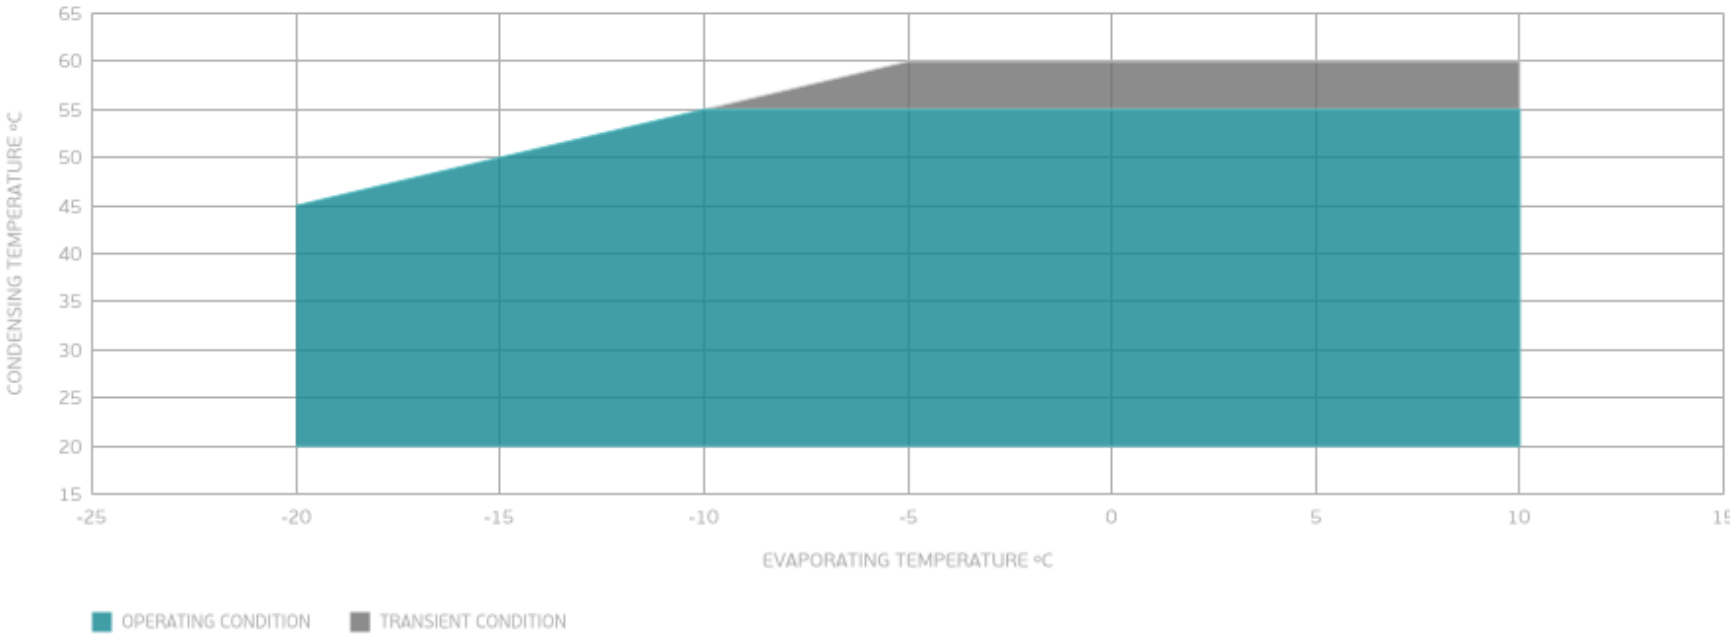

EXTERNAL DIMENSIONS

