


FERRO CONCEPTS

Bora™ Webbing Lock | Table of Contents

Product Overview 1
Bora™ Webbing Lock Installation2-5

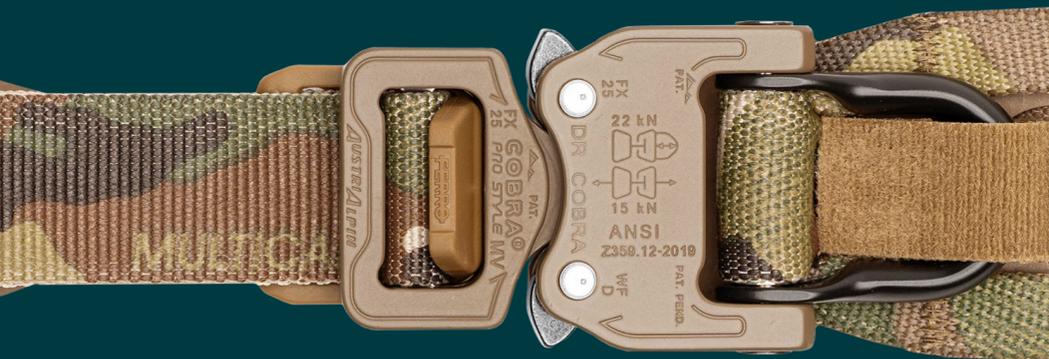

Bora™ Webbing Lock
installed on The Bora™ Belt



Bora™ Webbing Lock | Product Overview

The Bora™ Webbing Lock is a custom injection-molded accessory designed to keep your 1" belt webbing locked in place. Engineered specifically to integrate with the male end of the Cobra® buckle, this compact yet durable piece ensures your Bora™ Belt stays dialed in throughout wear. While built for a firm hold, the Bora™ Webbing Lock is also designed to be disengaged for intentional adjustment. Whether you're on the move or holding position, the Bora™ Webbing Lock prevents slippage and keeps your belt setup streamlined and secure. The Bora™ Webbing Lock can be used on all former Ferro Concepts Battle Belts featuring the AustriAlpin FX 25 Pro Style Buckles.

Features:

- Lightweight, low-profile
- Compatible with the Bora™ Belt and all former Ferro Concepts Battle Belts
- Designed for 1" webbing
- Interfaces directly with the male end of the Cobra® buckle
- Precision-molded for a seamless fit
- Allows for quick, intentional adjustment when needed
- Made in USA
- Maintains tight, slip-free webbing control

Components:

- Bora™ Webbing Lock



Bora™ Webbing Lock (Front)



Bora™ Webbing Lock (Back)

Bora™ Webbing Lock | Installation

Installation on The Bora™ Belt



1. To install the Bora™ Webbing Lock, start by removing the Male end of the Cobra® buckle from the 1" webbing.



2. Once the Male end of the Cobra® buckle has been removed, pass the 1" webbing through the slot on the Bora™ Webbing Lock.

Bora™ Webbing Lock | Installation

Installation on The Bora™ Belt



3. Reinstall the Male end of the Cobra® buckle by passing the 1" webbing up through the innermost slot on the Male Cobra® buckle.




4. Pass the 1" webbing down through the outermost slot on the Male Cobra® buckle.

Bora™ Webbing Lock | Installation

Installation on The Bora™ Belt




5. Tighten or loosen 1" webbing to desired length.
*Note - The Bora™ Webbing Lock allows you to tighten the webbing once installed.

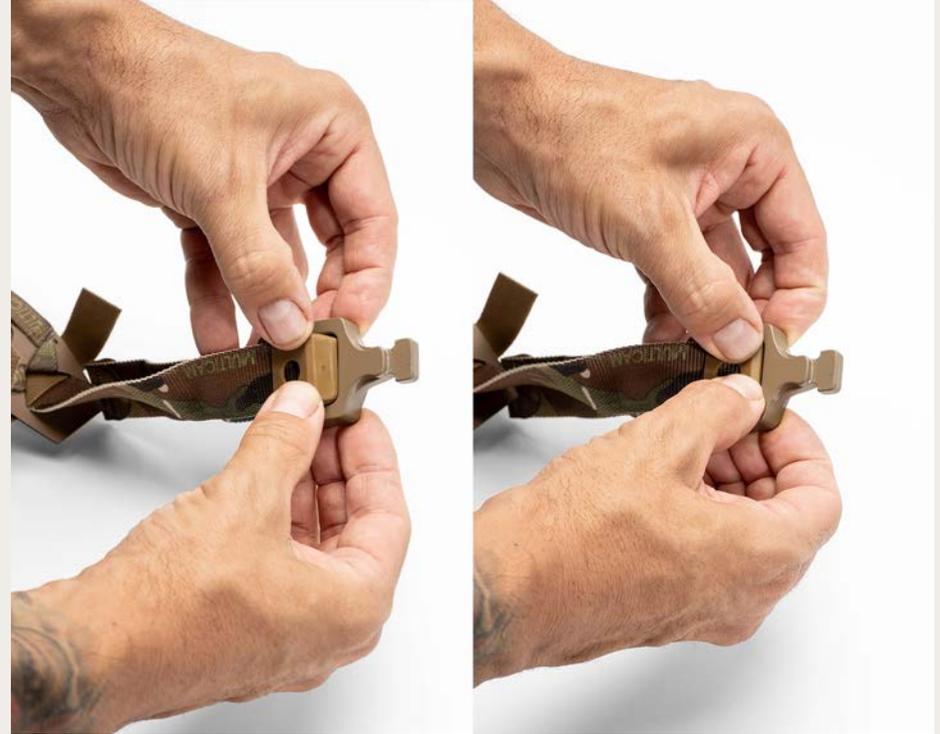

6. Once the webbing is adjusted to desired length, press the Bora™ Webbing Lock into the back of the Male Cobra® buckle.

Bora™ Webbing Lock | Installation

Installation on The Bora™ Belt

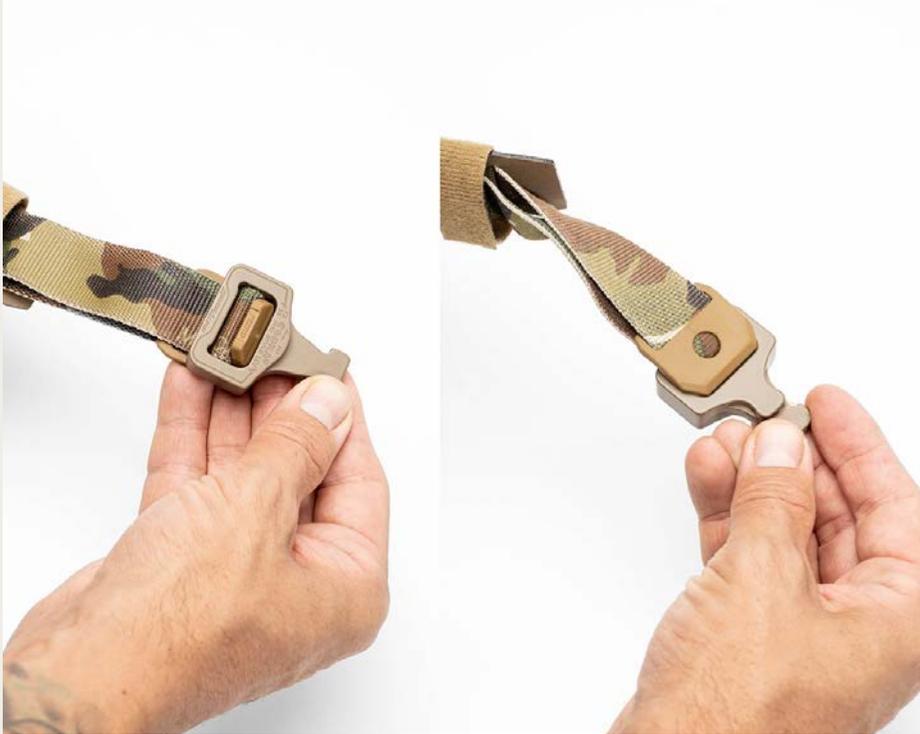

7. Make sure that the Bora™ Webbing Lock is fully seated into the back of the Male end of the Cobra® buckle and the 1" webbing is properly threaded through the buckle. The Bora™ Webbing Lock allows for tightening of the 1" webbing while the lock is engaged. If you need to loosen the 1" webbing press the lock down and out of the Male end of the Cobra® buckle to disengage.

