

Single-phase Residential Hybrid Inverter



X1-HYBRID G4

3.0kW / 3.7kW / 5.0kW / 6.0kW / 7.5kW



Smart Management

- VPP ready, ancillary service in power market
- Global MPP scan for optimal energy harvest
- Smart loads management (e.g. heat pump, smart EV charger)
- Intelligent ToU-driven energy management
- CT compatibility with fast load response in just 0.3 seconds



High Performance

- 200% PV oversizing and up to 110% AC output
- Up to 200% PV input
- Up to 97% efficiency in charging and discharging
- Low start-up voltage for longer operation



Assured Reliability


- Up to 150% EPS output for 10s
- UPS-level switchover time <10ms
- IP65 Ingress protection
- Type II SPD on AC&DC side




Flexible Adaptability

- Lithium & Lead-acid battery compatible
- Max. 16A DC input current for high power solar panel
- On-grid and off-grid parallel function, up to 15kW

Efficiency Curve

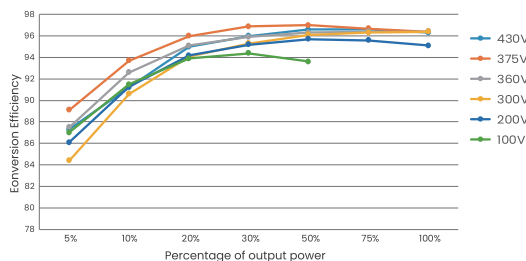

Circuit Diagram

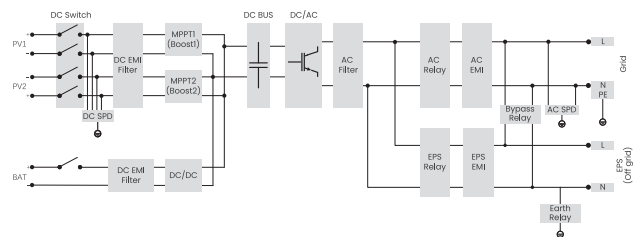

PV INPUT					
Max. recommended PV array power	6.0 kWp	7.4 kWp	10.0 kWp	12.0 kWp	15.0 kWp
Max. PV input voltage ^①	600 V				
Rated PV input voltage	360 V				
Operation voltage range	70 ~ 550 V				
MPPT voltage range ^②	70 ~ 550 V				
Start-up voltage	90 V				
No. of MPP trackers / Strings per MPP tracker	2 (1 / 1)				
Max. input current per MPPT	16 A / 16 A				
Max. input short circuit current per MPPT	20 A / 20 A				
AC INPUT & OUTPUT (ON-GRID)					
Rated output power	3000 W	3680 W	5000 W (Germany 4600 W, AU 4999 W)	6000 W	7500 W
Max. output apparent power	3300 VA	3680 VA	5500 VA (4600 VA for VDE4105, 4999 VA for AS4777)	6600 VA	7500 VA
Max. output continuous current	14.4 A	16.0 A	23.9 A (Germany 20 A, AU 21.7 A)	28.6 A	32.6 A
Rated AC voltage	1 / N / PE, 220 / 230 / 240 V				
Max. AC input apparent power	6300 VA	7360 VA	9200 VA	9200 VA	9200 VA
Max. AC input current	27.4 A	32.0 A	40.0 A	40.0 A	40.0 A
Nominal AC frequency	50 Hz / 60 Hz				
THDi (rated power)	< 2%				
BATTERY					
Battery type	Lithium / Lead - acid				
Battery voltage range	80 ~ 480 V				
Max. charge / discharge current	30 A				
EPS (OFF-GRID) OUTPUT (WITH BATTERY)					
Rated EPS output voltage, frequency	230 V, 50 Hz / 60 Hz				
Rated EPS output power	3000 VA	3680 VA	5000 VA	6000 VA	7500 VA
Peak EPS output power	6000 VA, 10 s	6000 VA, 10 s	7500 VA, 10 s	9000 VA, 10 s	11250 VA, 10 s
Switchover time	< 10 ms				
EFFICIENCY					
Max. efficiency	97.6%				
European efficiency	97.0%				
ENVIRONMENT LIMIT					
Ingress protection	IP65				
Operation temperature range	-35 ~ 60°C (> 45°C derating)				
Max. operation altitude	3000 m				
Relative humidity	4 ~ 100% RH (condensing)				
GENERAL					
Dimensions (W × H × D)	482 × 417 × 181 mm				
Net weight	24 kg				25 kg
Cooling concept	Natural cooling				Smart air cooling
Communication interfaces	CT / Meter (optional), External control RS485, Dongle interface, DRM, NTC (optional)				
Certification	VDE-AR-N 4105, G99, G98, AS/NZS4777, EN50549, CEI 0-21, C10/11 IEC61727, RD1699, NRS 097-2-1, PEA/MEA, VFR2019, PPDS				
PROTECTION					
Protections	Over / under voltage protection, DC isolation protection, DC reverse-polarity protection				
Active anti-islanding method	Frequency shift				
Surge protection	DC: Type II, AC: Type II				
Arc-fault circuit interrupter (AFCI)	Optional				

① The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage the inverter

② Input voltage exceeding the MPPT voltage range may trigger inverter protection