

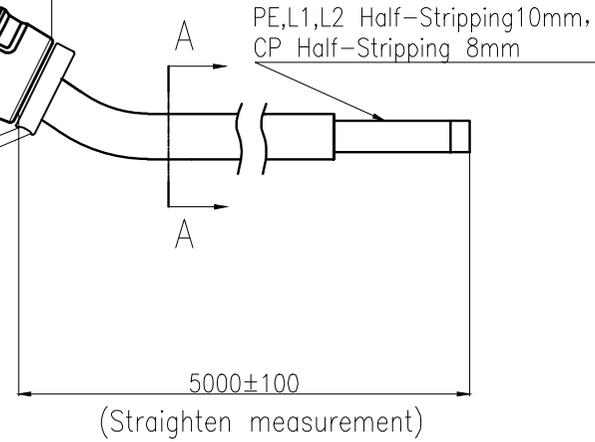
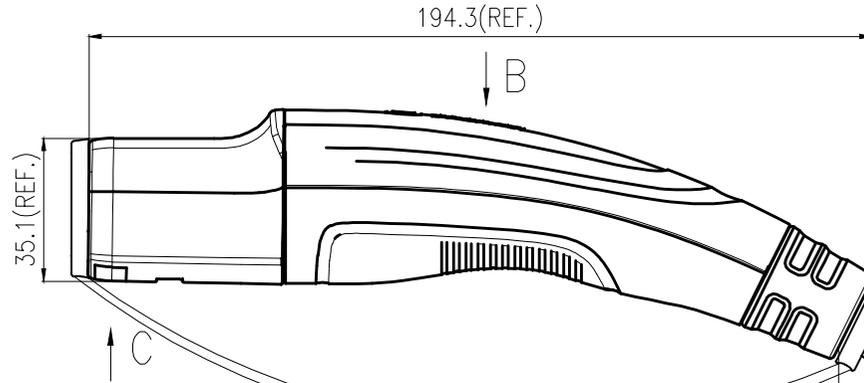


未注公差/General tolerances(mm)											0.1/10 ±2'		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250			
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

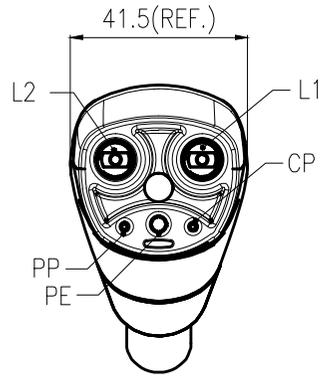

Wiring diagram


- L1 10AWG Brown
- L2 10AWG Blue
- CP 18AWG Red
- PP
- PE 10AWG Yellow/Green



R1 = 150Ω ± 10%
R2 = 330Ω ± 10%

B Silk screen printing:
DEGSON

C Laser Printing Note:
MTAC-S-032A-V-03-5.0M-10AH
32A 240V AC
TYPE 3R
20xxxxx-xxxx

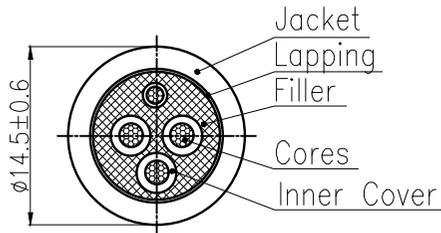

额定电压/Rated voltage	240V AC/32A
绝缘电阻/Insulation resistance	>100MΩ, 500V DC 1min
耐压/Withstanding voltage	L1, L2 and PE ,2500V AC 1min
	L1 and L2 ,2500V AC 1min
防护等级/Ingress protection	TYPE 3R
插拔寿命/Insertion/Pullout times	10,000 Times
插拔力/Insertion/Pullout force	<90N
使用温度范围/Operating temperature(°C)	-30~+50
线材规格/Cable specification	3*10AWG+1*18AWG Black
标准/Reference standard	NACS,UL2251
符合RoHS环保要求/Conform to RoHS	Yes

DEGSON		MATERIAL:	SURFACE/COLOR		
		MAT NO./REV:	DO-1 MAT STATUS:		
APPD:		NAME MTAC-S-032A-V-03-5.0M-10A(H)			
CHKD:		DRAWING NO.	TYPE	DRAWING STATUS	SCALE
DRFT: Zhang Q	2024.02.21		CUSTOMER DRAWING		SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 未经授权复制或传播本文档内容，或未经许可擅自使用其内容，均属于侵权行为，公司将依法追究。本公司保留所有权利。