


Ultra V Pro mini

HALF-CELL N-Type TOPCon MONOFACIAL MODULE
 TYPE: STP 440S - C54/Nshm

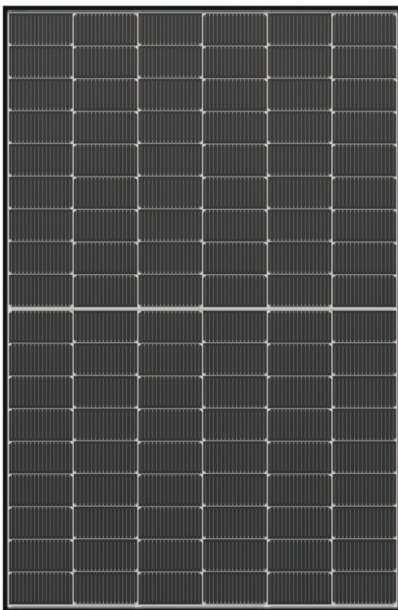

440W
POWER OUTPUT

22.5%
MAX EFFICIENCY



High module conversion efficiency
 Module efficiency up to **22.5%** achieved through advanced cell technology and manufacturing process



Multi-grid technology
 superior optical utilization and current collection capability, effectively improving product power and reliability



Excellent low light performance
 more power output in low light conditions such as cloudy days, mornings and evenings



Extended wind and snow load tests
 Module certified to withstand extreme wind (**3800 Pascal**) and snow loads (**6000 Pascal**)*




ISO 14001 Environment Management System
 ISO 45001 Occupational Health and Safety
 ISO 9001 Quality Management System
 SA 8000 Social Responsibility Standards
 IEC TS 62941 Guideline for Module Design

IEC 61701 Salt-mist certification
 IEC 62716 ammonia certification
 IEC 60068-2-68 Dust and Sand
 IEC 61730-2 (UL790) fire class C



25 years of linear warranty
25 years of product warranty

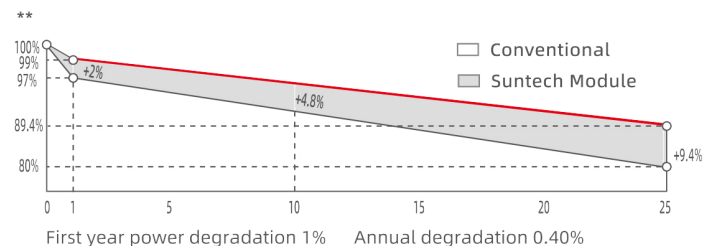

* Please refer to Suntech Standard Module Installation Manual for details.

** Please refer to Suntech Limited Warranty for details.


*** WEEE only for EU market.

**** Suntech reserves the right to the final.


Ultra V Pro STP 440S - C54/NshM

Mechanical Characteristics

Solar Cell	N-type Monocrystalline silicon 182 mm
No. of Cells	108 (6 × 18)
Dimensions	1722 × 1134 × 30 mm (67.8 × 44.6 × 1.2 inches)
Weight	21.0 kgs (46.3 lbs.)
Front Glass	3.2 mm (0.126 inches) fully tempered glass
Output Cables	4.0 mm ² , (-) 350 mm (+) 160 mm in length or customized length
Junction Box	IP68 rated (3 bypass diodes)
Operating Module Temperature	-40 °C to +85 °C
Maximum System Voltage	1500 V DC (IEC)
Connectors	MC4-EVO2
Maximum Series Fuse Rating	25 A
Power Tolerance	± 3%
Frame	Anodized aluminum alloy frame
Packing Configuration	36 Pieces per pallet 936 Pieces per container /40'HC 1755×1120×1255 794kg

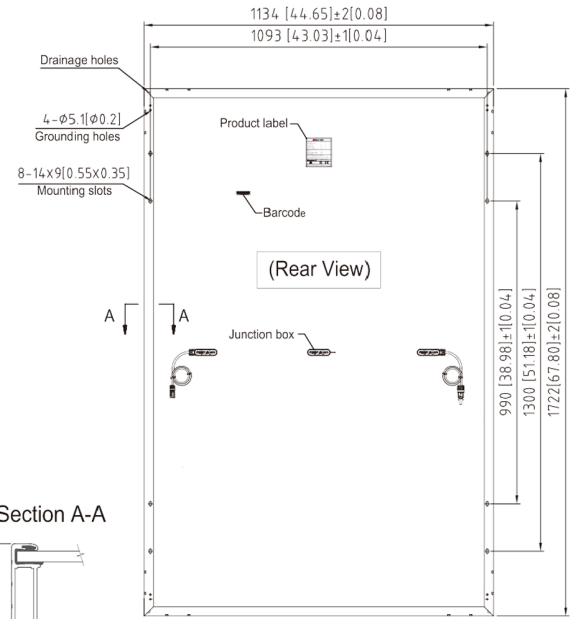

Section A-A



Note:mm[inch]

Electrical Characteristics

Module Type	STP440S-C54/NshM	
Testing Condition	STC	NMOT
Maximum Power (Pmax/W)	440	336.4
Optimum Operating Voltage (Vmp/V)	32.69	30.5
Optimum Operating Current (Imp/A)	13.46	11.03
Open Circuit Voltage (Voc/V)	38.98	37.0
Short Circuit Current (Isc/A)	14.41	11.62
Module Efficiency (%)	22.5%	


STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5; NMOT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s; Tolerance of Pmax is within +/- 3%;

Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42 ± 2 °C
Temperature Coefficient of Pmax	-0.30%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.046%/°C

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

Graphs Current-Voltage & Power-Voltage Curve (440S)

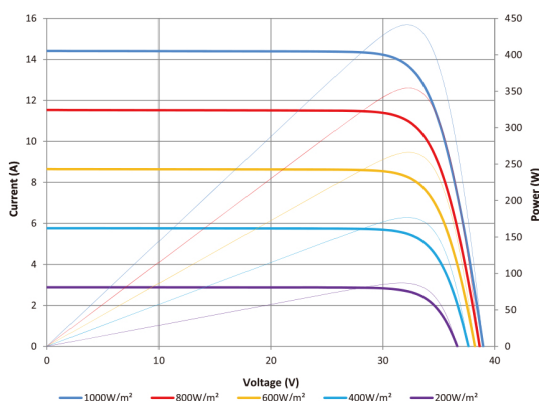

Information bar

Distribution | Supply Chain | Project Solutions

07 3505 3030

team@solarau.com.au

https://solarau.com.au