



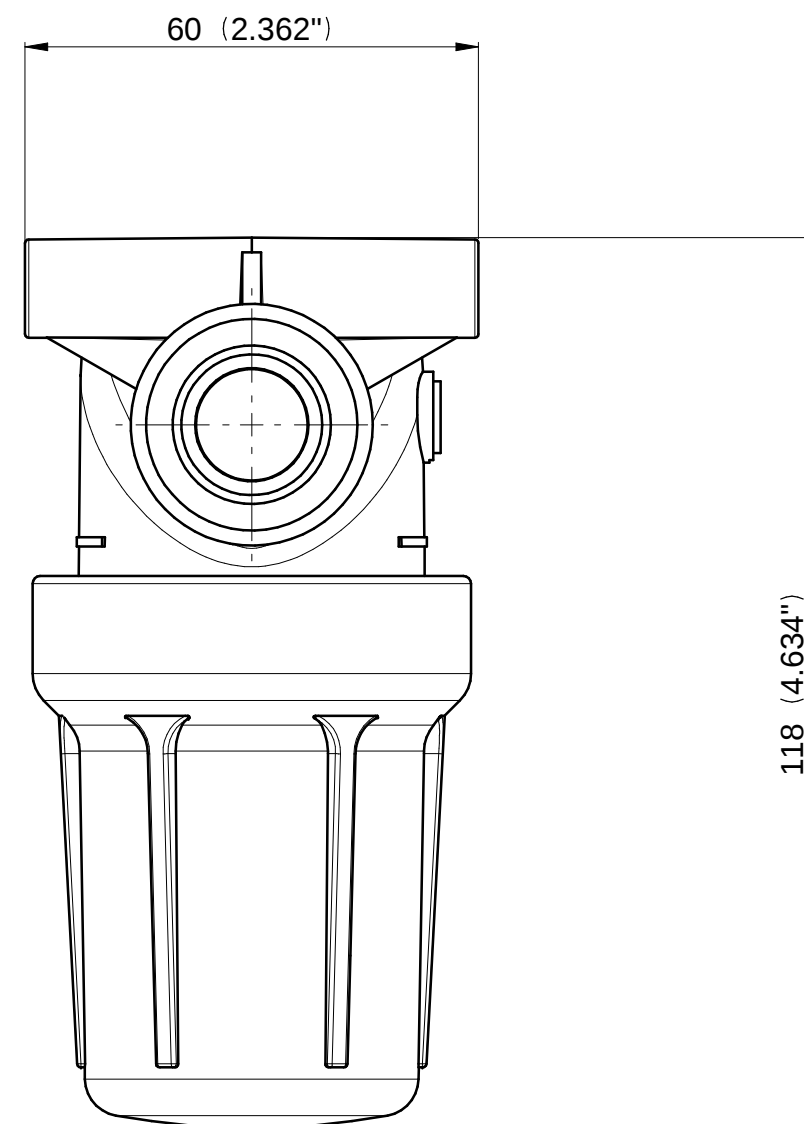

GENERAL FEATURES:

- Max. working pressure 10 bar (145 PSI);
- Filtering capacity 55 l/min @ 0.5 bar (14.5 GPM @ 7 PSI);
- Stainless steel cartridge Ø27x69mm (Ø1.1"x2.7");
- Fiberglass-reinforced polypropylene body;
- EPDM gaskets (VITON® optional);
- Transparent Nylon® bowl;
- Screen type 50 mesh;
- Effective filtering area 23.5 cm² (3.6 sq.inch).

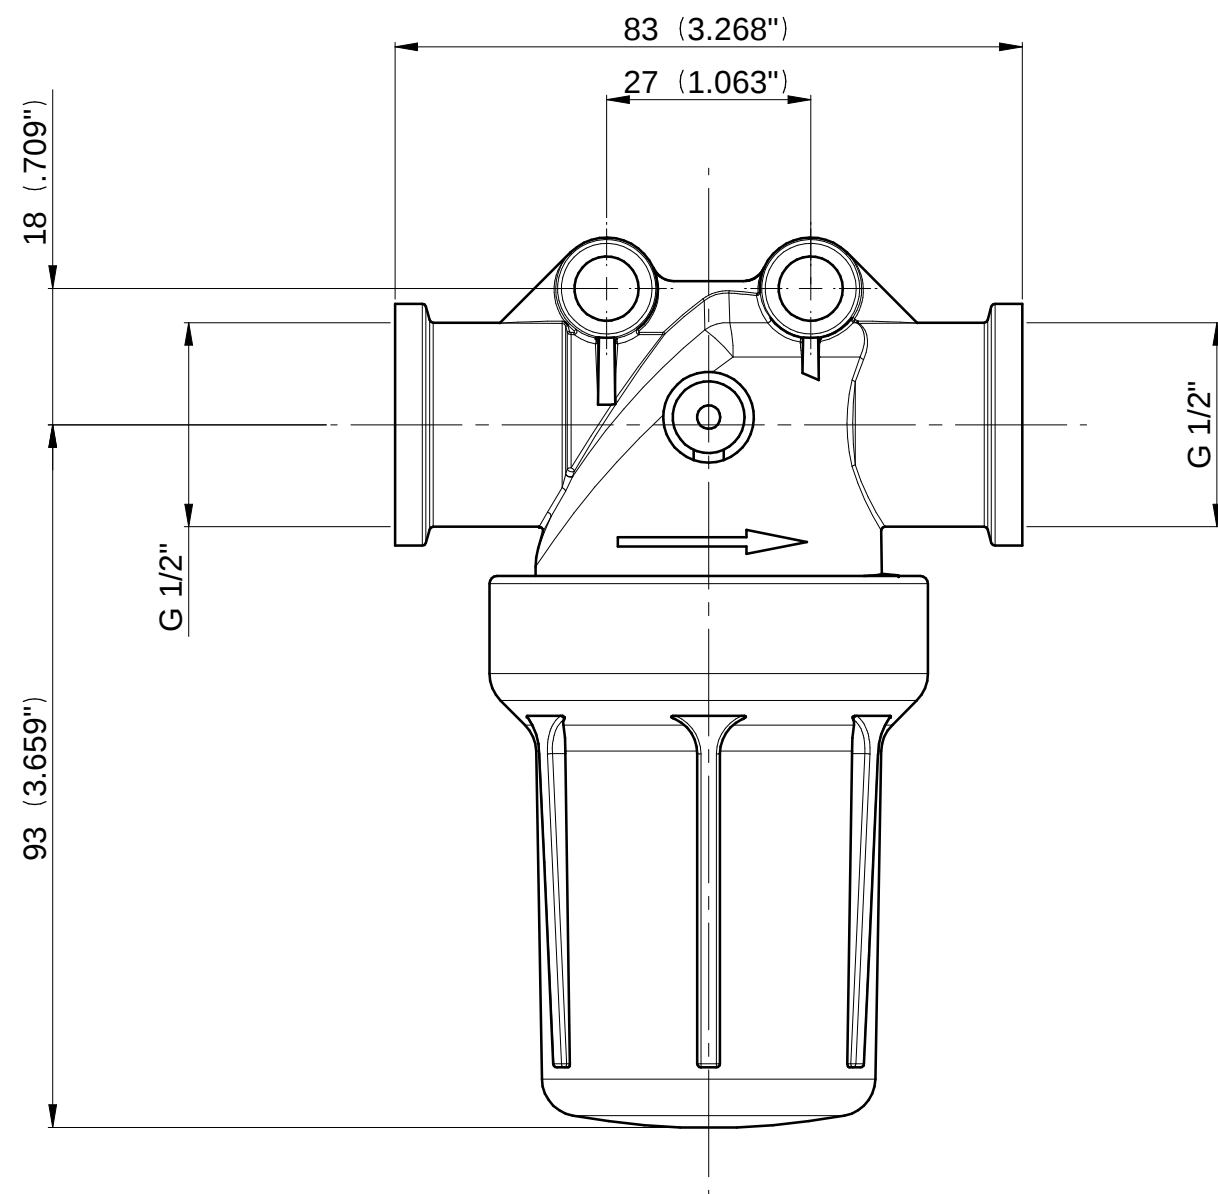

SCALA 1:2

ARAG®
A Nordson Company

DISEGNO

3240T023

INDICE MODIFICA

0

DENOMINAZIONE

FILTRO LINEA MINI 1/2"F 50M. TRASP

CLASSE TOLLERANZA EN-ISO 2768-VL

PRIMA EMISSIONE DISEGNO

FIRMA

GibertiniF

DATA

16/04/2024

SCALA

1:1

DIS.

A3

QUESTO E' UN DOCUMENTO RISERVATO DI PROPRIETA' DI ARAG srl, via Palladio 5/A 42048 RUBIERA (RE) ITALY. IL SUO CONTENUTO NON POTRA' ESSERE COMUNICATO A TERZI SENZA IL PERMESSO SCRITTO DEL PROPRIETARIO.
THIS CONFIDENTIAL DOCUMENT IS EXCLUSIVE PROPERTY OF ARAG srl, via Palladio 5/A 42048 RUBIERA (RE) ITALY. ITS CONTENTS CANNOT BE DISCLOSED TO ANYONE WITHOUT WRITTEN PERMISSION OF THE OWNER.

REV 01