

OFF GRID HYBRID INVERTER

Isolar Series PV 60-500Vdc 8.5 / 11KW 220V / 230Vac Output



Dual Outputs



Lithium Battery
Activation



Dual MPPT



Parallel 6 units



PF=1.0



PV 60-500Vdc



Pure sine wave




RS232 RS485



Product Features

- Dual AC output
- Built-in 2 MPPT
- Parallel max up to 6 units
- Lithium battery activation function by PV or Utility
- Compatible work with LiFePO4 battery via RS485
- Pure Sine Wave
- Power factor 1.0
- PV Input 500Vdc Max
- Built-in MPPT 140A/160A
- Capable to work without battery
- Detachable dust cover for harsh environment
- Wifi remote monitoring optional
- Support multiple output priority: SUB,SBU,SUF
- EQ function to optimize battery performance and extend lifecycle

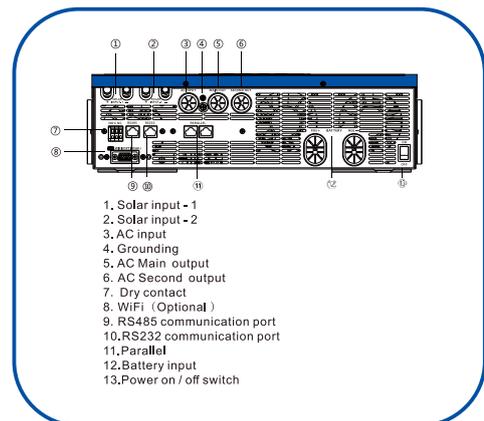

Technical Data

MODEL	ISolar-SMG-II-1 1KP-WiFi
CAPACITY	11KVA/11KW
Maximum PV Input Power	11KW
Twin AC Output Function	YES
Maximum Main Output Power	11KVA/11KW
Maximum Second Output Power	5.5KVA/5.5KW
Maximum Total Output Power	11KVA/11KW
Parallel Capability	YES, 6units
Lithium Battery Communication	YES(RS485)
Lithium Battery Activation	YES(By PV or Utility)
Built-in WIFI	Optional
INPUT	
Nominal Voltage	230VAC
Acceptable Voltage Range	170-280VAC(For personal Computer);90-280VAC(For Home Appliances)
Frequency	50/60 Hz (Auto sensing)
OUTPUT	
Nominal Voltage	220/230/240VAC
Surge Power	22000VA
Frequency	50/60 Hz
Waveform	Pure Sine wave
Transfer Time	10ms(For personal Computer);20ms(For Home Appliances)
Peak Efficiency (PV to INV)	96%
Peak Efficiency (Battery to INV)	93%
Overload Protection	5s@ > =140% load; 10s@110%~140% load
Crest Factor	3:1
Admissible Power Factor	0.6~1 (inductive or capacitive)
BATTERY	
Battery Voltage	48VDC
Maximum Discharge Current	220A
Floating Charge Voltage	54VDC
OverCharge Protection	63VDC
Charging Method	CC/CV
Solar Charger & AC Charger	
Solar Charger TYPE	MPPT
Max.PV Array Power	5500W*2
Max. PV Array Open Circuit Voltage	500VDC
PV Array MPPT Voltage Range	60VDC~500VDC
Max. Solar Input Current	18A*2
Max. Solar Charge Current	160A
Max. AC Charge Current	120A
Max. Charge Current	160A
PHYSICAL	
Dimensions, D x W x H(mm)	540*415*122
Net Weight (Kgs)	15.5
Communication Interface	RS232/RS485/Dry-contact
LCD	YES
ENVIRONMENT	
Operating Temperature Range	-10°C to 55°C
Storage temperature	-15°C~ 60°C
Humidity	5% to 95% Relative Humidity (Non-condensing)
Ingress Protection	IP21

Product specifications are subject to change without further notice.