

# G4 Pro


## 4G Multi-Biometric Access Control Terminal With a Multi-tech Card Module

Compatible with

 **ZKBio CVSecurity**

Compatible with

 **ZKBio Time**

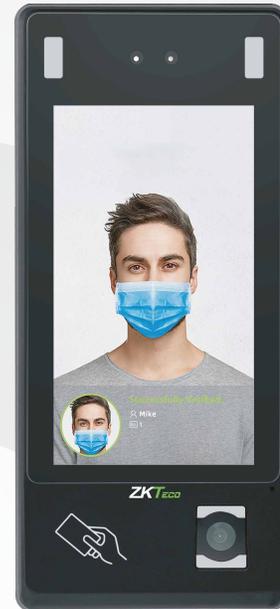

**G4 Pro** is equipped with a fully upgraded version of the Android 9.0 system, adding new features such as PoE power supply, and it is compatible with 4G network, satisfying various market needs including Europe, the Middle East, Africa, South Korea, Thailand, and India

Resembles G4, **G4 Pro** is equipped with ZKTeco's enhanced Visible Light Facial Recognition technology. Also, **G4 Pro** has installed a new mini QR code reader to scan T&A/A&C dynamic QR codes on the ZKBioSecurity mobile application. The reader supports QR code, PDF417, Data Matrix, MicroPDF417, Aztec scanning in third-party development projects.

ZKTeco also provides an LCDP tool which is used for 3rd party applications integration. It includes simplified bottom hardware interface, algorithm interface and some upper business logic and configuration, which can make development more easier and more efficient.

### Features

- Compatible with 4G network optional, supported E.U. , UAE, Africa, South Korea, Thailand, India, etc.
- Scanning of T&A/A&C dynamic QR codes on the ZKBioSecurity Mobile App
- Open Supervised Device Protocol (OSDP v2.1.7)
- Dual-frequency (125kHz and 13.56MHz) card module (standard)
- Support Multi-tech card module (optional)
- Android Andriod LCDP for the 3rd-party application integration
- IEEE 802.3af/at PoE (Power over Ethernet) power supply
- Mask detection
- Anti-spoofing algorithm against print attack (laser, color, and B/W photos) and video attack

## Specifications (GL Exclusive Feature)

### Capacity

- 50,000 Users
- 50,000 Faces
- 50,000 Cards
- 1,000,000 Transactions

### CPU

64bit Octa-core Customized Computer  
Vision 1.8GHz CPU

### Storage

2GB LPDDR3  
16GB eMMC

### Screen

7-inch Touch Screen  
720\*1280 Pixels

### Camera

2MP Binocular Camera

### Communication

- TCP/IP, USB Host, RS485, Wiegand Input, Wiegand Output, Wi-Fi, Bluetooth, 4G (optional)
- WLAN: 2.4G, 802.11 b/g/n
- Bluetooth: BT2.1+EDR/3.0/4.1 LE/4.2 BLE
- LTE FDD: B1/B2/B3/B4/B5/B7/B8/B20/B28
- LTE TDD: B38/B39/B40/B41
- WCDMA: B1/B2/B4/B5/B8
- GSM: 1800/1900MHz

### Access Control Interface

RS485 (OSDP v2.1.7), Wiegand In/Out, Lock Relay Output, Exit Button, Alarm Output, Auxiliary Input, Door Sensor, External Bell

### Card

125kHz ID card & 13.56MHz IC card  
Multi-tech Card Module (optional)

### QR Code Scanner

Dynamic QR codes on the ZKBioSecurity mobile application  
QR code, PDF417, Data Matrix, MicroPDF417, Aztec scanning in third-party development projects

### Fingerprint (optional)

- Z-ID Fingerprint Sensor
- 30,000 Fingerprints

### Algorithms

ZKFace 5.6.2  
ZKFinger 10.0

### Operating Temperature

-20°C to 55°C (-4°F to 131°F)

### Operating Humidity

<90%RH

### Storage Temperature

-25°C to 65°C (-13°F to 149°F)

### Storage Humidity

<90%

### Dimensions (H\*L\*D)

264mm\*120mm\*51mm (9.69in\*4.72in\*2in)

### Facial Recognition Speed

≤ 0.5s

### Facial Recognition Distance

0.5m to 3m

### Power supply

- DC 12V, 3A
- IEEE 802.3af/at

### Standard Firmware Functions

Push, Schedule Bell, Automatic Status Switch, Record Query, Access Levels, Groups, Holidays, DST, Duress Mode (Password & Fingerprint), Anti-Passback, Customization of Wallpaper & Screen Saver

### Software

ZKBioTime (Only Time & Attendance Firmware)  
ZKBio CVSecurity


### SDK

Android LCDP  
PUSH SDK


### Certifications

CE, FCC, ISO9001, ISO14001, ISO20000

## Configuration

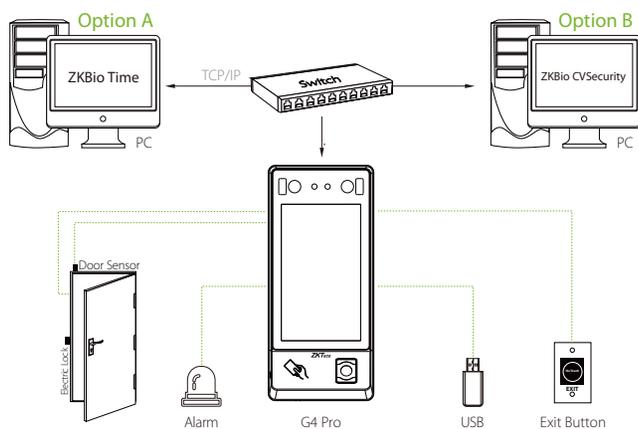

## Dimensions (mm)

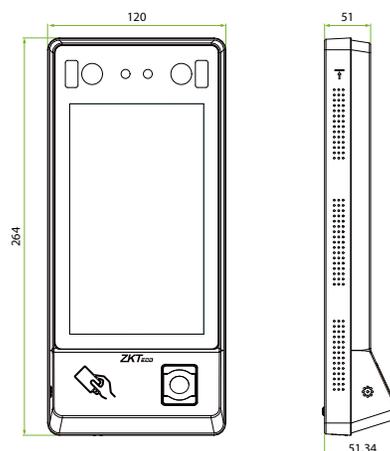

V4.3 06/27/2023

ZKTECO CO., LTD.

www.zkteco.com

E-mail: sales@zkteco.com



Copyright © 2023 ZKTECO CO., LTD. All rights reserved.