[illegible]

BBGP-125LFP

[illegible] Dsjj Clcpew [illegible] JgDcNM2

- [illegible]
- [illegible]
- [illegible]
- [illegible]

[illegible]

[illegible]

Rear view

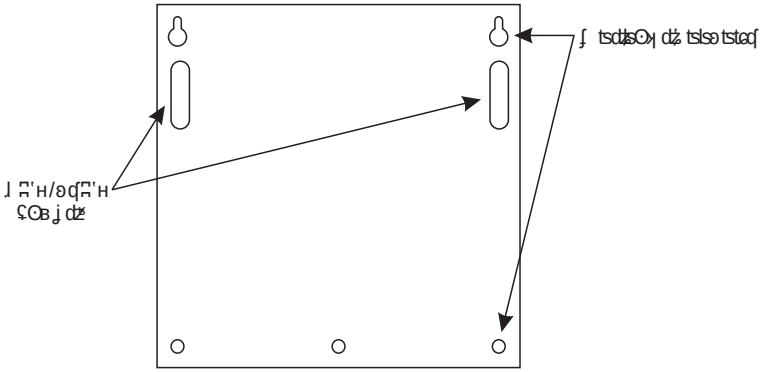

[illegible]

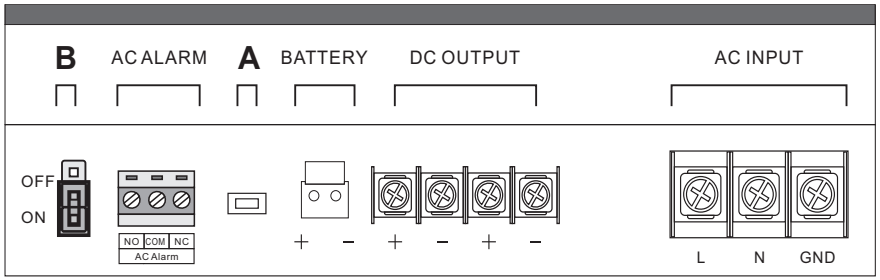

[illegible]

[illegible]

[illegible]	Amber	Green	Red
[illegible]	on	on	on
[illegible]	flash	on	on
[illegible] AC, V-[illegible] > 10±0.3V	on	on	off
[illegible] AC, V-[illegible] < 10±0.3V	off	off	off

AC [illegible]:

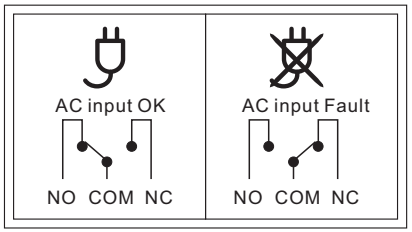

[illegible]:

[illegible] 30 [illegible] 3-[illegible] [illegible] [illegible] [illegible] 10,0 [illegible], [illegible] 1 [illegible] [illegible].

Main specification

[illegible]: 100-240 [illegible] 50/60 [illegible]
[illegible]: 12,0 [illegible]
[illegible] 5.0Amp
[illegible]: 14,5 [illegible]
[illegible]: 3,0 [illegible]
[illegible]: -20~+45 [illegible]
[illegible]: [illegible] 90% [illegible]

[illegible]

[illegible]
[illegible]
[illegible]
[illegible]
[illegible]
[illegible]
[illegible]
[illegible]
[illegible]

[illegible]

- Перед використанням переконайтеся, що вхідна напруга джерела живлення та напруга місцевої мережі збігаються.
- ДБЖ має бути встановлено в контрольованому середовищі, переконайтеся, що джерело живлення добре вентилюється.
- Заземлення джерела живлення є обов'язковим.
- Неналежне середовище зберігання та встановлення може погіршити ізоляцію, вкоротити життя компонентів та спричинити несправності.

Увесь вміст, специфікації та наявність можуть бути змінені без попереднього повідомлення.