

CT SERIES



High
Performance



Quiet Operation
Design



Compact Design



Easy Montage &
Service Intervention




High Efficiency
Aluminium Fins



Durable Casing



CT SERIES

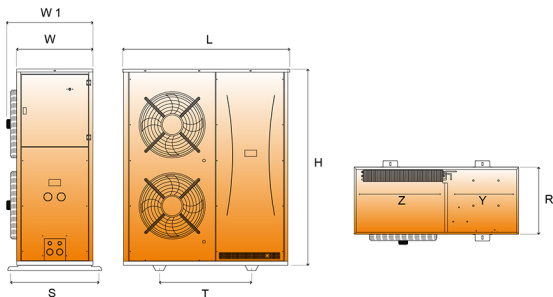

CT SERIES CAPACITY TABLE

3,5 kW 32 kW

EAC CE

Model	Capacity		Surface m ²	Air Flow		Tube Volume dm ³	Fan Diameter nxØ mm	Sound Pressure Level		Connections		Dimensions								
	ΔT 15K			1400 rpm 900 rpm				10 m (EN13487)		Inlet	Outlet	W	W1	H	L	S	T	R	Y	Z
	1400 rpm Watt	900 rpm Watt		m ³ /h	m ³ /h			dB(A)	dB(A)	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
CT 07	3583	-	7	1360	-	0,7	1x300	26	-	5/8"	1/2"	350	530	480	800	375	485	340	350	410
CT 10	4759	-	10	1680	-	0,9	1x300	26	-	5/8"	5/8"	350	530	480	800	375	485	340	350	410
CT 15	6826	5870	14,5	2200	1562	1,2	1x350	32	21	5/8"	5/8"	350	530	580	910	375	485	340	465	400
CT 20	8686	7469	17,1	3410	2421	1,3	1x400	37	27	5/8"	5/8"	350	530	680	1010	375	570	340	510	460
CT 30	12514	10762	27,6	3500	2485	2,5	1x400	37	27	22	5/8"	350	530	680	1010	375	570	340	510	460
CT 40	14994	12894	36,8	4900	3479	3,3	1x450	41	31	22	5/8"	350	530	880	1160	375	710	350	510	620
CT 50	19831	17054	43,4	7795	5534	3,7	2x400	40	30	22	19	400	580	1230	1210	425	760	400	545	620
CT 60	22703	19524	57,9	7485	5314	4,9	2x400	40	30	28	22	400	580	1230	1210	425	760	400	545	620
CT 70	26846	23087	65,3	9540	6773	5,2	2x450	44	34	28	22	400	580	1230	1210	425	760	400	545	620

CT 10 H	5906	5079	10,8	2250	1597	0,9	1x350	32	21	5/8"	5/8"	350	530	580	910	375	485	340	465	400
CT 15 H	8678	7463	14,5	3150	2236	1,2	1x400	37	27	5/8"	5/8"	350	530	580	910	375	485	340	465	400
CT 20 H	10078	8667	17,1	4600	3266	1,3	1x450	41	31	5/8"	5/8"	350	530	680	1010	375	570	340	510	460
CT 30 H	15777	13568	27,6	4700	3337	2,5	1x450	41	31	22	5/8"	350	530	680	1010	375	570	340	510	460
CT 40 H	19237	16543	36,8	7110	5048	3,3	1x500	46	28	22	5/8"	350	530	880	1160	375	710	350	510	620
CT 50 H	22660	19487	43,4	9600	6816	3,7	2x450	44	34	22	19	400	580	1230	1210	425	760	400	545	620
CT 60 H	26846	23087	57,9	9540	6753	4,9	2x450	44	34	28	22	400	580	1230	1210	425	760	400	545	620
CT 70 H	32056	27658	65,3	11900	8449	5,2	2x500	49	31	28	22	400	580	1230	1210	425	760	400	545	620