


工作方式: S1  
 绝缘等级: B、F  
 防护等级: IP44、IP54  
 环境温度: -30℃~60℃  
 认证: CCC、CE、UL  
 能效指标: 符合ErP2015  
 Mode of operation: S1  
 Insulation class: B、F  
 Type of protection: IP44、IP54  
 Ambient temperature: -30℃~60℃  
 Certificates: CCC、CE、UL  
 Target energy efficiency: ErP2015

■ 风量曲线

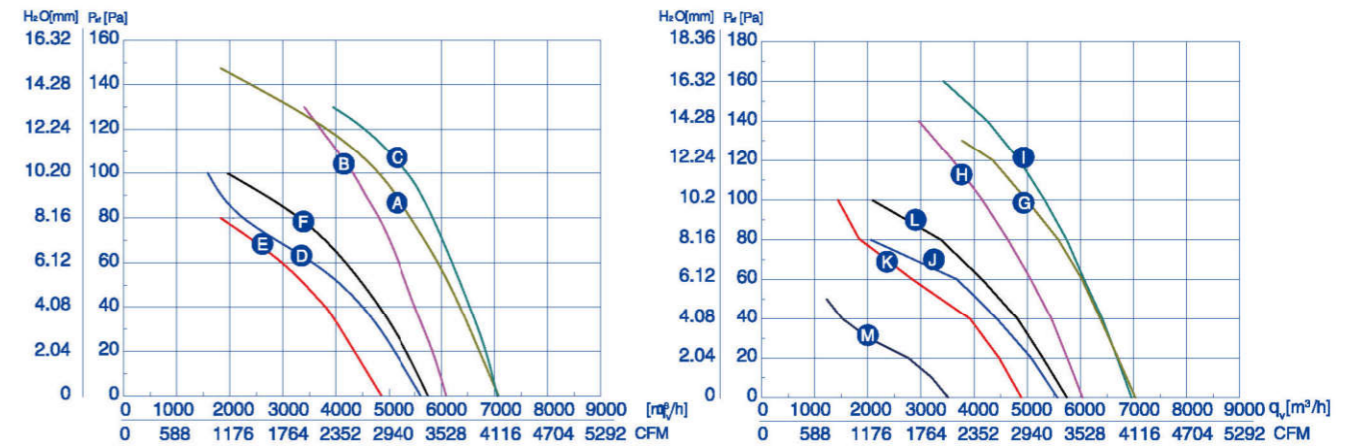

■ 技术参数

型号	额定电压	频率	额定电流	输入功率	额定转速	电容	噪音	叶片数	净重	曲线	备注
TYPE	V	Hz	A	W	r/min	$\mu$ F	dBA	BLADE	kg	CURVE NO.	NOTE.
YWF4E-500S-137/35	220	50	1.75	380	1320	10	71	5	9.0	A	
		50	1.35	295	1380	10	70	5	9.0	B	
		60	2.10	450	1580		72	5	9.0	C	
YWF6E-500S-137/35	220	50	1.05	230	900	10	66	5	9.0	D	
		50	1.00	200	915	10	65	5	9.0	E	
		60	1.20	260	1050		67	5	9.0	F	
YWF4D-500S-137/35	380	50	0.85	414	1300	/	71	5	9.0	G	
		50	0.68	275	1380	/	70	5	9.0	H	
		60	0.75	395	1550		72	5	9.0	I	
YWF6D-500S-137/35	380	50	0.54	210	900	/	66	5	9.0	J	
		50	0.45	150	920	/	65	5	9.0	K	
		60	0.48	210	1050		67	5	9.0	L	
YWF8D-500S-137/35	380	50	0.47	130	700	/	54	5	9.0	M	