


NT6226GK



**ENGINEERING CODE**  
923BA92

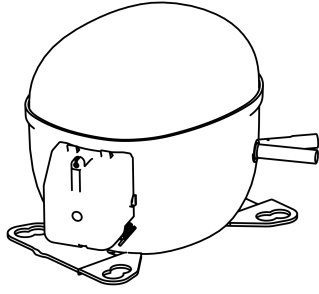

**REFRIGERANT**  
R-404A



**POWER SUPPLY**  
220-240 V 50 Hz



**APPLICATION**  
MBP



**MOTOR TYPE**  
CSCR



**STANDARD**  
EN12900



**COOLING CAPACITY**  
1763 W



**EFFICIENCY**  
1.79 W/W



DATA

GENERAL DATA

Model	NT6226GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1+
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	7.56 Ω at 25°C
Run Winding Resistance	2.22 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	37 A

## MECHANICAL DATA

Displacement	22.37 cm <sup>3</sup>
Oil Charge	450 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	16.6 Kg

## ELECTRICAL COMPONENTS

Start Capacitor	130-156 µf/250 V
Run Capacitor	20.0 µf/400 V
CSR CSIR BOX	Yes
Starting Device Description	RVA403C-123
Overload Protection	T0828/C9

## PERFORMANCE

### TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	MBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

### RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
45	-10	1763	1.79	985	4.77	52.92

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 35°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1353	1.79	758	3.82	35.05
-15	1707	2.08	822	4.12	44.65
-10	2121	2.36	897	4.41	55.92
-5	2595	2.66	974	4.71	69.09
0	3129	3.00	1042	5.03	84.37
5	3724	3.42	1090	5.35	101.98
10	4381	3.95	1108	5.69	122.15

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 45°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1116	1.33	837	4.07	32.89
-15	1413	1.57	901	4.42	42.03
-10	1763	1.79	985	4.77	52.92
-5	2166	2.00	1081	5.13	65.78
0	2621	2.23	1177	5.48	80.83
5	3131	2.48	1264	5.85	98.29
10	3694	2.78	1330	6.23	118.37


Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

**PERFORMANCE CURVE**
**Condensing Temperature 55°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	1414	1.39	1020	5.15	50.12
-5	1738	1.55	1122	5.58	62.49
0	2108	1.71	1235	6.00	77.13
5	2523	1.87	1348	6.44	94.25
10	2986	2.06	1450	6.88	114.07

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

## ENVELOPE

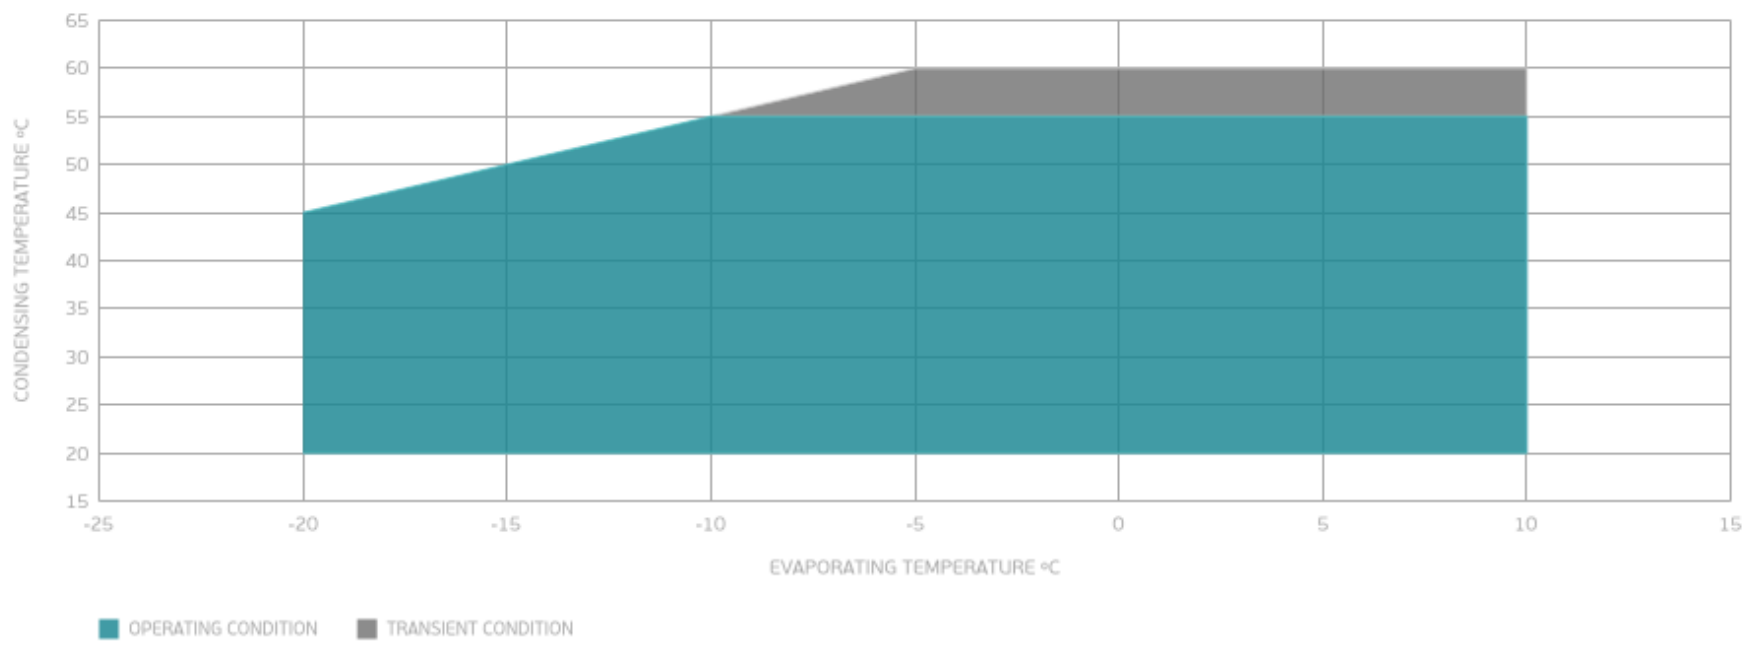

## External

### EXTERNAL CHARACTERISTICS

Base Plate UNI

Tray Holder NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

### EXTERNAL DIMENSIONS

