



■ Nuova linea ventose a soffiato



art. BM..35

■ Con supporto in ottone nichelato


Art.	Forza	A	BØ	CØ	DØ	EØ
BM 11 35V	0,47	17	8	3,8	11	6
BM 11 35	0,47	17	8	3,8	11	3,6
BM 16 35	0,75	19,5	8	3,8	16	8



art. BF..35

■ Con supporto in alluminio anodizzato


Art.	Forza	A	BØ	CØ	DØ
BF 20 35	1,5	20	14,5	5	20
BF 30 35	2,6	26	20	6,5	30
BF 40 35	4,9	28	20	6,5	40
BF 50 35	8,5	35	27	10,5	50

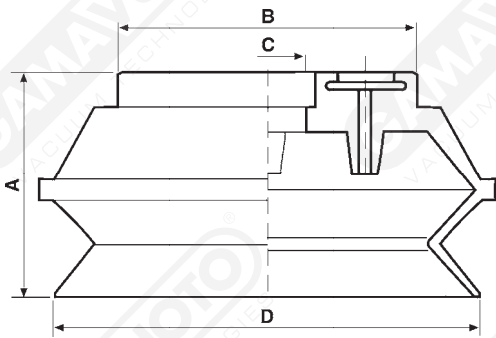

art. BF..35

■ Con supporto in alluminio anodizzato e anello di bloccaggio

Art.	Forza	A	BØ	CØ	DØ
BF 75 35	22	38	55	10	75
BF 110 35	45	50	80	25	110
BF 150 35	91	70	110	25	150

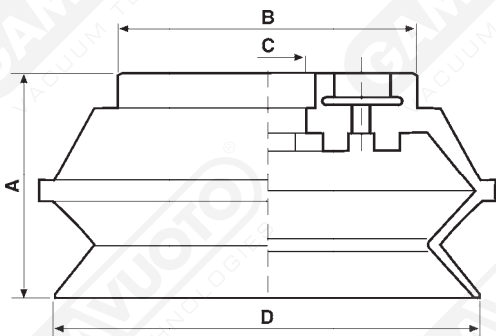

art. BF..35

■ Con supporto in alluminio anodizzato

Art.	Forza	A	BØ	CØ	DØ
BF 78 35	22	38	55	10	78
BF 115 35	45	52,5	80	25	115
BF 160 35	91	68,2	110	25	160