

Ø400 外转子轴流风机 Axial Fans

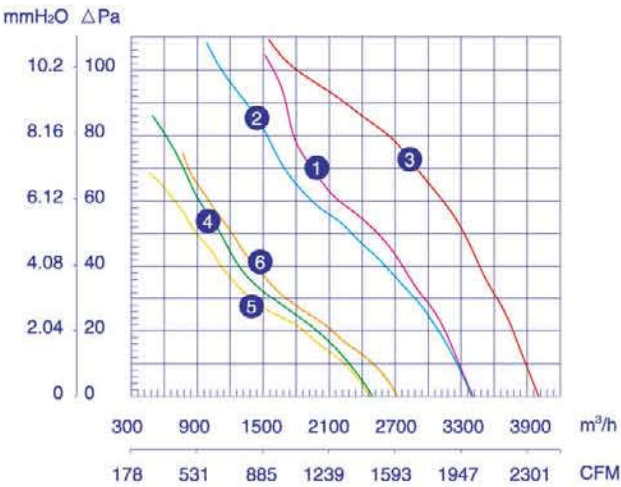






使用说明:

工作方式: S1
绝缘等级: B级 F级
环境温度: -30℃ ~ 60℃

应用范围:

4D-400 380V/50Hz 0~90Pa (20Pa-3150m³/h)
4E-400 220V/50Hz 0~90Pa (20Pa-3200m³/h)
4E-400 120V/60Hz 0~90Pa (20Pa-3800m³/h)
6D-400 380V/50Hz 0~60Pa (20Pa-1980m³/h)
6E-400 220V/50Hz 0~60Pa (20Pa-1880m³/h)
6E-400 120V/60Hz 0~60Pa (20Pa-2150m³/h)



				VOLTAGE 额定电压 V	FREQUENCY 频率 Hz	CURRENT 额定电流 A	INPUT 输入功率 W	SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	CAPACITANCE 电容 μF	NOISE 噪音 dBA	NET WEIGHT 净重 kg	LICENSE 证书	NO.ON THE CURVE
YWF-4D-400-S-102/47-G	YWF-4D-400-S-102/47-T	YWF-4D-400-S-102/47-B	YWF-4D-400-S-102/47-R	380	50	0.47	180	1380	3400	/	68	6.0	CCC CE	1
YWF-4E-400-S-102/47-G	YWF-4E-400-S-102/47-T	YWF-4E-400-S-102/47-B	YWF-4E-400-S-102/47-R	220	50	0.82	180	1380	3541	6	68	6.0	CCC CE	2
YWF-4E-400-S-102/47-G	YWF-4E-400-S-102/47-T	YWF-4E-400-S-102/47-B	YWF-4E-400-S-102/47-R	120	60	2.35	250	1600	4000	22	58	6.0	CCC CE	3
YWF-6D-400-S-102/47-G	YWF-6D-400-S-102/47-T	YWF-6D-400-S-102/47-B	YWF-6D-400-S-102/47-R	380	50	0.38	108	920	2490	/	58	6.0	CCC CE	4
YWF-6E-400-S-102/47-G	YWF-6E-400-S-102/47-T	YWF-6E-400-S-102/47-B	YWF-6E-400-S-102/47-R	220	50	0.50	108	920	2460	4	58	6.0	CCC CE	5
YWF-6E-400-S-102/47-G	YWF-6E-400-S-102/47-T	YWF-6E-400-S-102/47-B	YWF-6E-400-S-102/47-R	120	60	1.20	135	960	2710	12	58	6.0	CCC CE	6

