




PK6520

PK-400-SFG14-HCPKG/US/ W



Pressure sensors

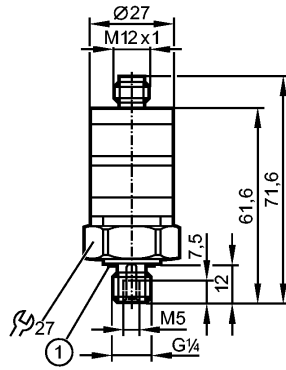

1: sealing FPM / DIN 3869-14



Product characteristics

Electronic pressure monitor

Quick disconnect

Process connection: G 1/4 A / M5 I

2 switching outputs
normally open / closed complementary

Measuring range: 0...400 bar / 0...5800 psi

Application

Application	Type of pressure: relative pressure Liquids and gases	
Pressure rating	600 bar	8700 psi
Bursting pressure min.	1600 bar	23200 psi
Medium temperature [°C]	-25...80	

Electrical data

Electrical design	DC PNP	
Operating voltage [V]	9.6...32 DC	
Current consumption [mA]	< 25	
Insulation resistance [MΩ]	> 100 (500 V DC)	
Protection class	III	
Reverse polarity protection	yes	

Outputs

Output	2 switching outputs normally open / closed complementary	
Output function	complementary	
Current rating [mA]	500	
Voltage drop [V]	< 2	
Short-circuit protection	yes (non-latching)	
Overload protection	yes	
Switching frequency [Hz]	100	

Measuring / setting range

Measuring range	0...400 bar	0...5800 psi
Setting range		
Set point, SP	20...400 bar	290...5800 psi
Reset point, rP	12...392 bar	175...5685 psi



PK6520

PK-400-SFG14-HCPKG/US/ W



Pressure sensors

Accuracy / deviations

Deviations (% of value of measuring range)

Switch point accuracy	< ± 2.5 *
Characteristics deviation	< ± 1.5 (BFSL) / < ± 2.5 (LS) **)
Repeatability	< ± 0.5
Temperature drift (/ 10 K)	< ± 0.5
in the temperature range [°C]	0...80

Software / programming

Adjustment of the switch point	Setting rings
--------------------------------	---------------

Environment

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 67

Tests / approvals

EMC	EN 61000-4-2 ESD:	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated:	10 V/m
	EN 61000-4-4 Burst:	2 kV
	EN 61000-4-5 Surge:	1 kV signal for DC units
	EN 61000-4-6 HF conducted:	10 V
Shock resistance	DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6:	20 g (10...2000 Hz)
MTTF [Years]		540

Mechanical data

Process connection	G ¼ A / M5 I	
Materials (wetted parts)	stainless steel 316L / 1.4404; FPM (Viton)	
Housing materials	PBT (Pocan); PC (Makrolon); FPM (Viton); stainless steel 316L / 1.4404	
Switching cycles min.	50 million	
Tightening torque [Nm]	25	
Weight [kg]	0.094	


Displays / operating elements

Display	Power LED green Switching status LED yellow
---------	--

Electrical connection

Connection	M12 connector
------------	---------------

Wiring



Remarks

Remarks	*) Setting accuracy **) BFSL = Best Fit Straight Line / LS = Limit Value Setting
Pack quantity [piece]	1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — PK6520 — 29.04.2014