

INTERUTTORI A PUNTALE SWITCH WITH SOCKET CONNECTOR

CODICE FAMIGLIA
FAMILY CODE


311001

DIN 72585


- Interruttore meccanico a puntale da utilizzarsi unicamente con carico max. sui contatti:
 - 5A lampada a 12V / 3A a 24V
oppure con carico minimo sui contatti:
 - 50 / 150 mA carico resistivo 12V / 24V.
- Interruttore NON idoneo per impiego in ambiente con pressione.
- Tenuta lato connettore DIN 72585: IP64K e IPX9K secondo NORMA DIN 40050 pat. 9 e NORMA CEI EN 60529.
- Mechanical push button switch only to be used with max load on contacts:
 - 5A bulb at 12V / 3A at 24V
or with minimum load on the contacts:
 - 50 / 150 mA resistive load 12V / 24V.
- Switch NOT suitable for use in pressurised environments.
- Socket connector DIN 72585: IP64K and IPX9K in accordance with DIN 40050 pat.9 and CEI EN 60529 standards.

CODICE / Order code
31100100125

CONTATTO / Contact
Normalmente chiuso
Normally closed



7201

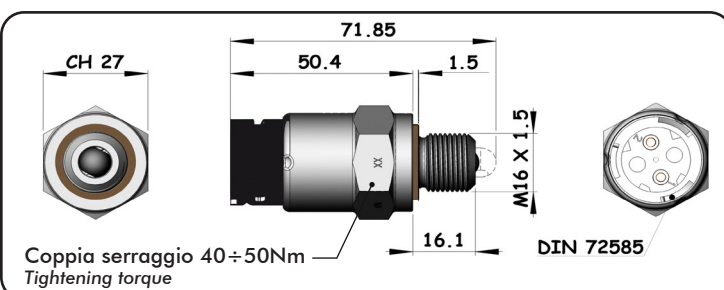


CODICE / Order code
31100100170

CONTATTO / Contact
Normalmente chiuso
Normally closed




7206

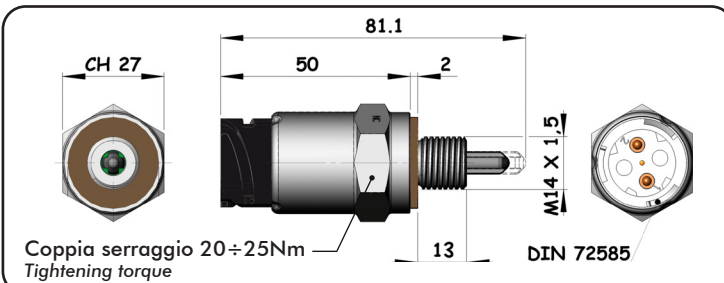


CODICE / Order code
31100100189

CONTATTO / Contact
Normalmente aperto
Normally open




7204

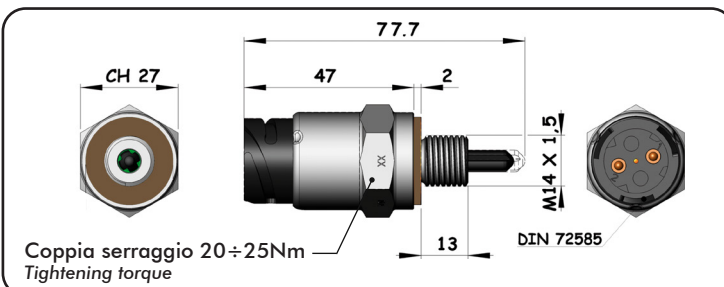


CODICE / Order code
31100100198

CONTATTO / Contact
Normalmente chiuso
Normally closed



7208

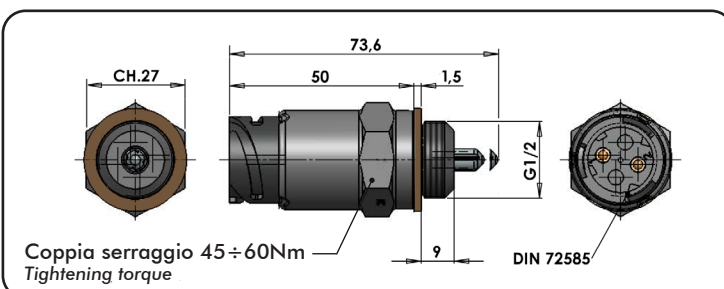

pag.1


OMFB
HYDRAULIC COMPONENTS

O.M.F.B. S.p.A. Hydraulic Components
We reserve the right to make any changes without notice.
Edition 2006.03 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611
Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:info@omfb.it


COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =

CODICE / Order code
31100100205

CONTATTO / Contact
Normalmente aperto
Normally open



7207

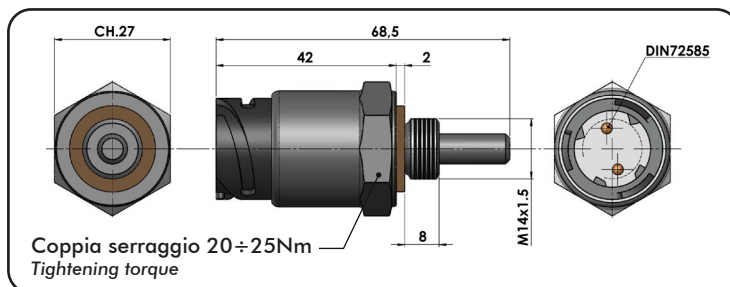

30600101518

Cablaggio per interruttore DIN 72585 - L= 6 m
Harness for DIN 72585 switch - L= 6 m



pag.2

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =

O.M.F.B. S.p.A. Hydraulic Components
We reserve the right to make any changes without notice.
Edition 2004.09 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611
Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:info@omfb.it

OMFB
HYDRAULIC COMPONENTS

PACKARD (AMP superseal 1,5 series)

- Interruttore meccanico a puntale da utilizzarsi unicamente con carico max. sui contatti:

- 3W lampada
- Tensione 12V - 24V
- Temperatura di esercizio: -25°C +80°C


- Mechanical push button switch only to be used with max load on contacts:

- 3W bulb
- Voltage 12V - 24V
- Working temperature: -25°C +80°C


CODICE / Order code
31100100107

CONTATTO / Contact
Normalmente chiuso
Normally closed

- Interruttore NON idoneo per impiego in ambiente con pressione.
- Switch NOT suitable for use in pressurised environments.




7131

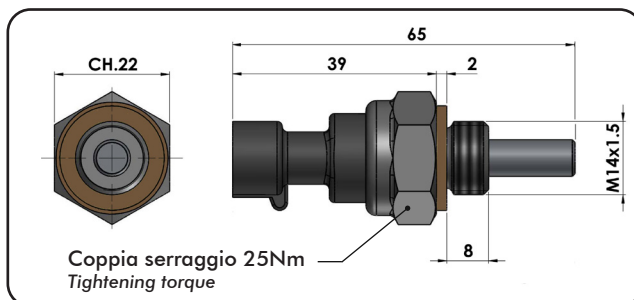


CODICE / Order code
31100100116

CONTATTO / Contact
Normalmente aperto
Normally open

- Interruttore NON idoneo per impiego in ambiente con pressione.
- Switch NOT suitable for use in pressurised environments.




7130

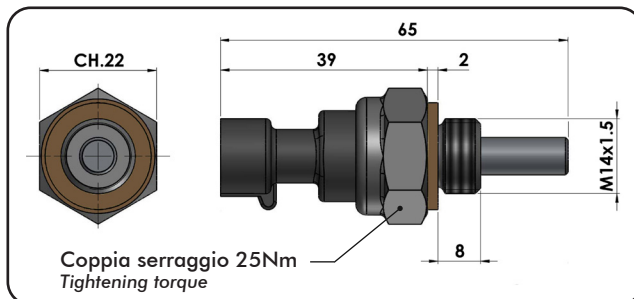


CODICE / Order code
31100100081

CONTATTO / Contact
Normalmente chiuso
Normally closed

ALTA PRESSIONE
HIGH PRESSURE
MAX. 12,5 bar



7118

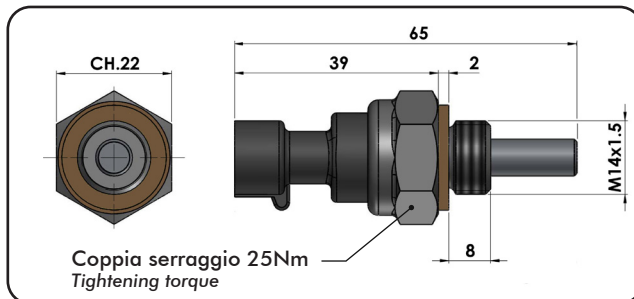

30600300106 *

Cablaggio per interruttore con
connettore AMP-Packard - L= 4 m
Harness for AMP-Packard switch - L= 4 m



* Codice per ricambio - Fornito di serie con le PTO che montano interruttore Packard
* Spare part code - Already Supplied with PTOs which requires Packard switch

OMFB
HYDRAULIC COMPONENTS

pag.3

O.M.F.B. S.p.A. Hydraulic Components
We reserve the right to make any changes without notice.
Edition 2004.09 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy Tel.: +39.030.9830611
Fax: +39.030.9839207-208 Internet:www.omfb.it e-mail:info@omfb.it

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =