Hidro
Pnevmo
Tehnika

*3, Vojeli St., Kazanlak, Bulgaria*
*Tel.: +359 431/62 228*
*Fax.: +359 431/62 019*
*e-mail : info@hpt-bg.com*
***www.hpt-bg.com***

# HYDRAULIC DIRECTIONAL VALVE WITH AUTOMATIC SWITCHING

## 4/2 RHA10/20

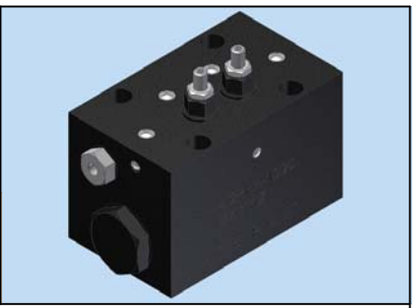

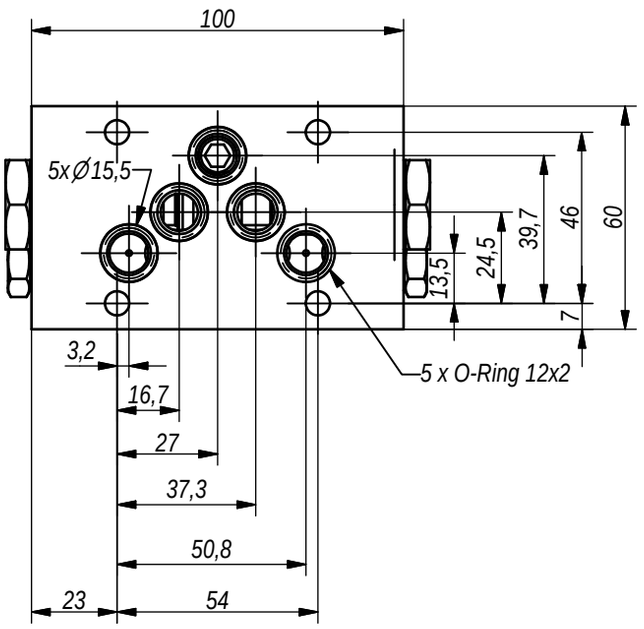





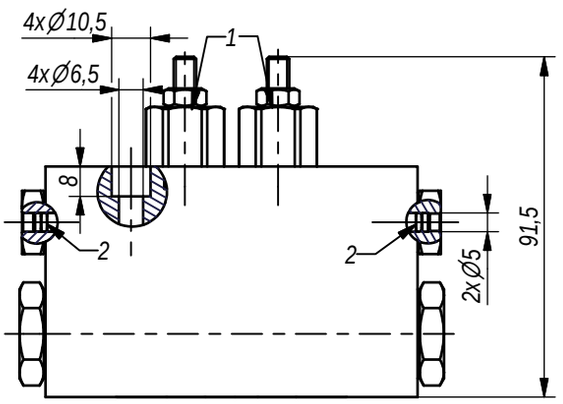


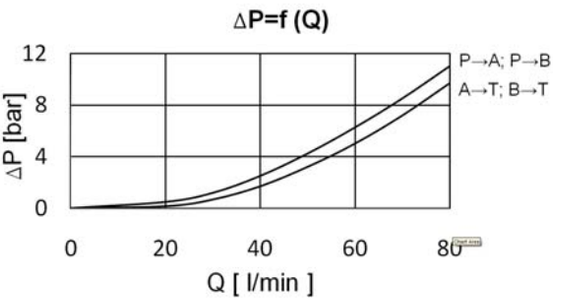


**Note:**
1. All performances and calibration are carried out by using hydraulic oil with viscosity approx 46 cSt at 50 °C.
2. Initial switching of directional control valve - by push pins position 2.
3. Mounting plate:
- acc. to ISO 4401-AB-05-4A (CETOP5)
4. Tightening torque of connecting screws on the mounting plate - 14 N.m.

| TECHNICAL DATA | | |
|---|---|---|
| General | | |
| Ambient temperature | °C | -20…+50 |
| Hydraulic | | |
| Working pressure $P_w$ | *bar* | 50..200 |
| Pressure adjustment of relief valves position 1 | | $P_w$+10%$P_w$ |
| Flow rate | *L/min* | 3..80 |
| Working fluid – mineral oil | | |
| - viscosity | $mm^2/s$ | 10..100 |
| - filtration level | $\mu m$ | 25 or better |
| - temperature | °C | -20..80 |

## ORDERING CODE

**4/2 RHA10 / 20**

- Type
- Working pressure - code: **50...200 bar - 20**



ТОВ "Промислова Гідравліка": https://promhydraulic.com.ua/ua/
Телефонуйте: +380 (95) 670-15-32, +380 (98) 533-91-67, +380 (96) 244-48-42