
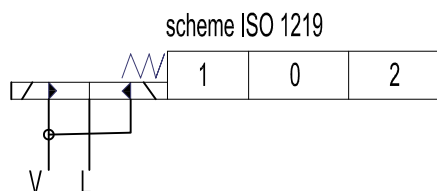
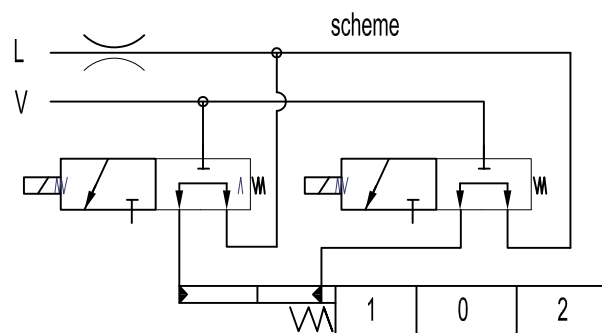


directional control valve P40

ED3 – electro-hydraulic control ON–OFF
Електрогидравлический контрол ON–OFF

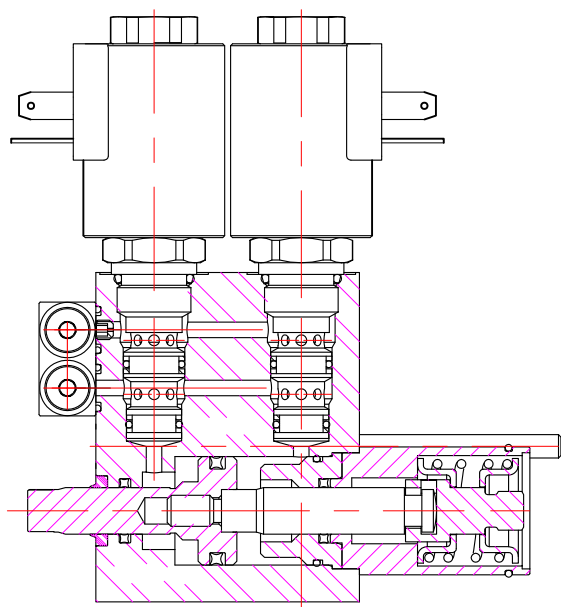

Operating pressure min 10 bar(145 psi)
Max operating pressure in L (T line) max 50 bar(725 psi)
25 bar(360 psi)

Ordering codes



3–wai solenoid valve–SV08–33
coil P40ED3–G–12VDC
coil P40ED3–G–24VDC

Solenoid operating features

Nominal voltage tolerance ±10%
Power rating 24W
Duty cycle 100 %

Collector kit for external pilot and drain – CEED...(1,2,3 ...)

Коллектор для внешнего питания управления и слив

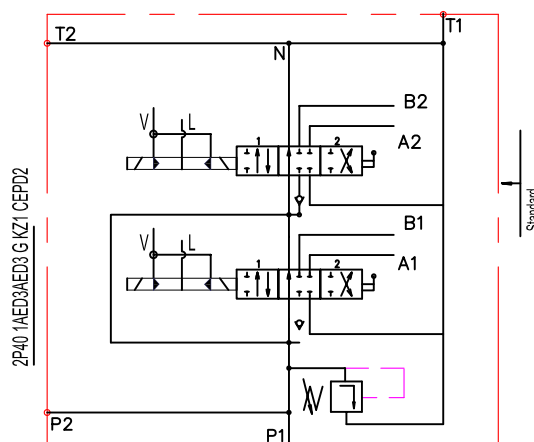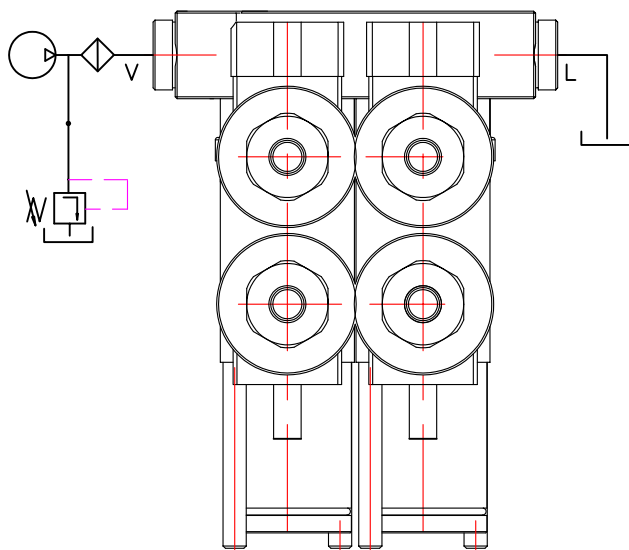

Ordering example


2P40–1A1ED3A1ED3 G KZ1–CEED2–12VDC

Ordering codes (BSP threads)

CEED1P40	Kit for 1 section
CEED2P40	Kit for 2 section
CEED3P40	Kit for 3 section
CEED4P40	Kit for 4 sektion
...	

directional control valve P40


ED3 – electro-hydraulic control ON–OFF
Электрогидравлический контрол ON–OFF

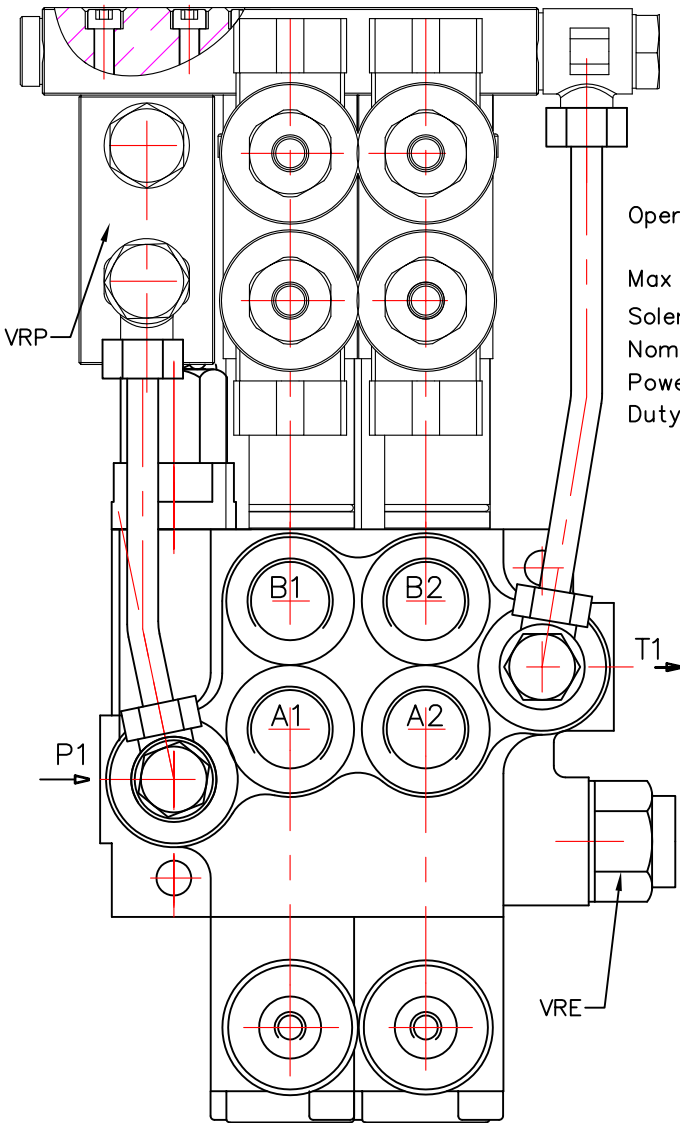

Order codes

3-wai solenoid valve–LSV2–08–3C
coil P40ED3–G–12VDC
coil P40ED3–G–24VDC

Operating pressure min 10 bar(145 psi)
max 50 bar(725 psi)
Max operating pressure in L (T line) 25 bar(360 psi)
Solenoid operating features
Nominal voltage tolerance ±10%
Power rating 24W
Duty cycle 100 %

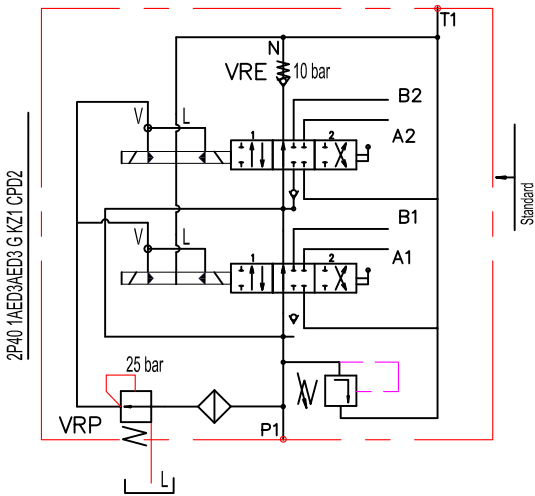


Ordering example

2P40–VRP– 1A1ED3A1ED3 G KZ1–CED2–VRE–12VDC

**Colector kit – Ordering codes
BSP threads**

CED1 Kit for 1 section
CED2 Kit for 2 section
CED3 Kit for 3 section
CED4 Kit for 4 sektion
.....

**Back pressure valve VRE–P40
Клапан подпорный на слив**

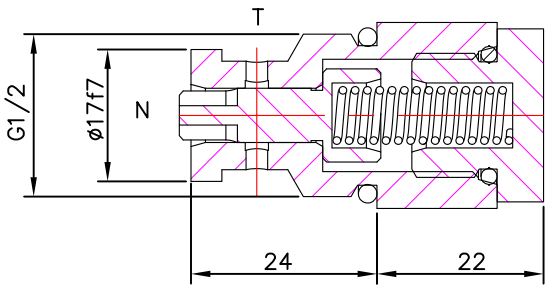

Pressure drop N–T

