


Z2FS6 SERIES THROTTLE/CHECK VALVES ARE USED TO RESTRICT FLOW IN ONE DIRECTION WHILE ALLOWING FREE-FLOW, AND IN THE OPPOSITE DIRECTION AS CHECK VALVES.

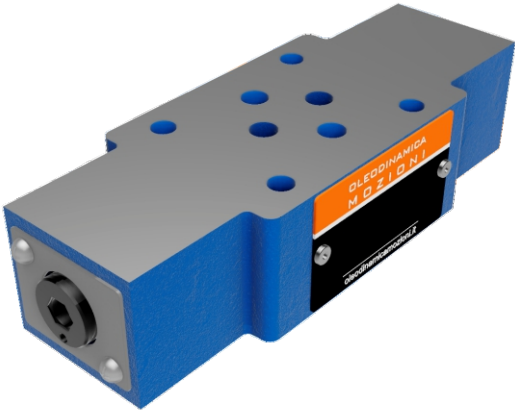


TECHNICAL DATA


SIZE	6
OPERATING PRESSURE (MPa)	31.5
MAX. FLOW RATE (L/MIN)	80
FLUID TEMPERATURE (°C)	-30 – 80
WEIGHT (KG)	1
VALVE BODY (MATERIAL)	CASTING PHOSPHATING SURFACE

SCHEMES


1 = COMPONENT SIDE, 2 = PLATE SIDE

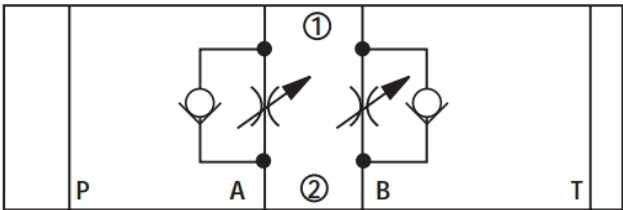


Z2FS6

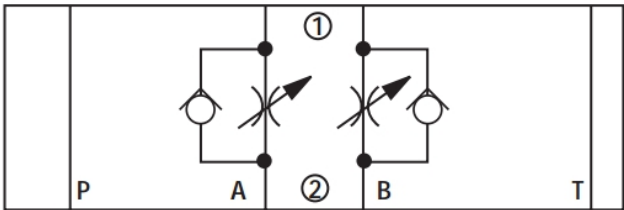

Z2FS6

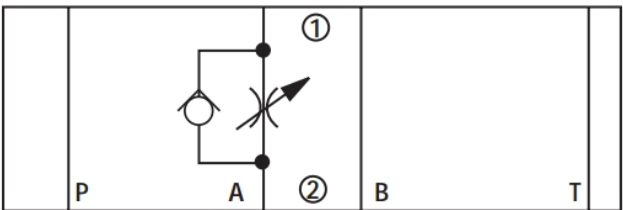



Z2FS6 A

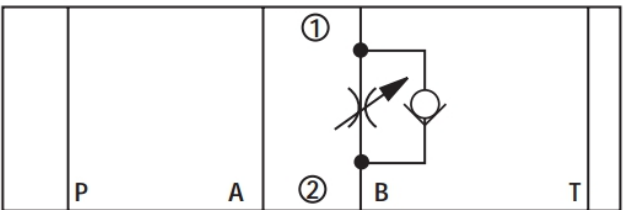

Z2FS6 B



CHARACTERISTIC CURVES

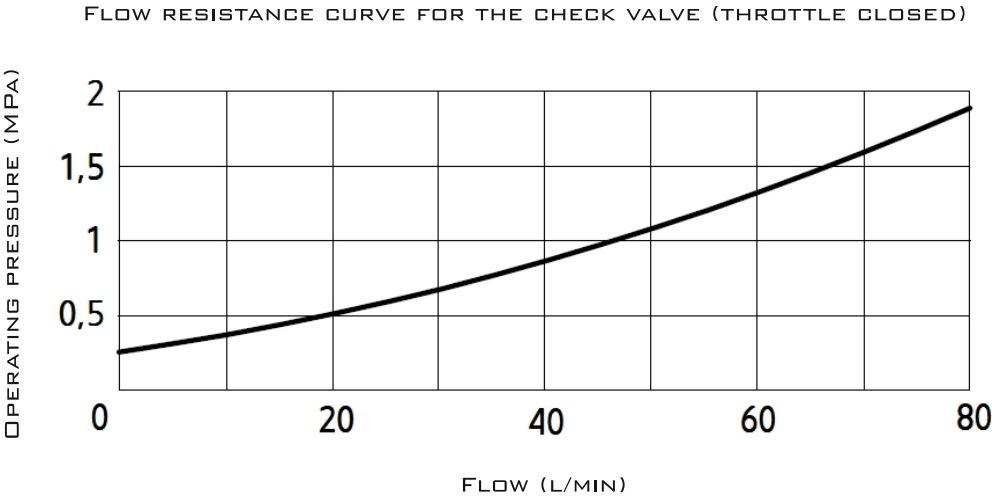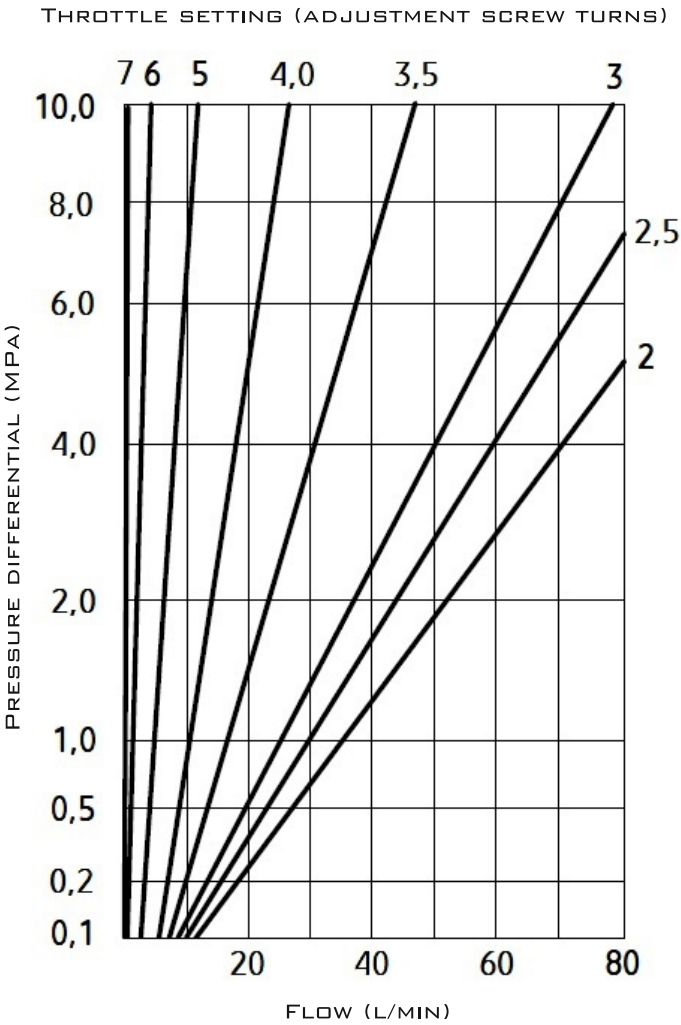

Z2FS6		VALVOLE DI FLUSSO	
MODULAR THROTTLE/CHECK VALVES			

ORDER CODE

Z2FS	6				
6=6 SIZE					
NO CODE=PORT A, B WITH THROTTLE A=PORT A WITH THROTTLE B=PORT B WITH THROTTLE					
3X=30-39 SERIES 4X=40-49 SERIES					
		ADDITIONAL REMARKS			
		NO CODE=NBR SEALS V=FKM SEALS			