

Z2FS22 SERIES MODULAR THROTTLE/CHECK VALVES ARE USED TO RESTRICT FLOW IN ONE DIRECTION WHILE ALLOWING FREE-FLOW IN THE OPPOSITE DIRECTION AS CHECK VALVES.




TECHNICAL DATA


SIZE	22
OPERATING PRESSURE (MPa)	35
MAX. FLOW RATE (L/MIN)	350
FLUID TEMPERATURE (°C)	-30 – 80
WEIGHT (KG)	8
VALVE BODY (MATERIAL)	CASTING PHOSPHATING SURFACE

SCHEMES

1 = COMPONENT SIDE, 2 = PLATE SIDE

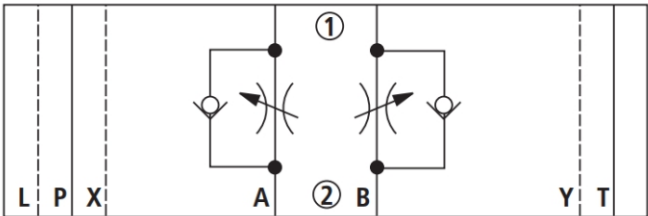


S=INPUT THROTTLE

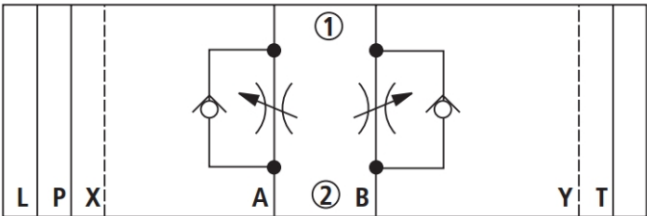


S2=OUTPUT THROTTLE



CHARACTERISTIC CURVES

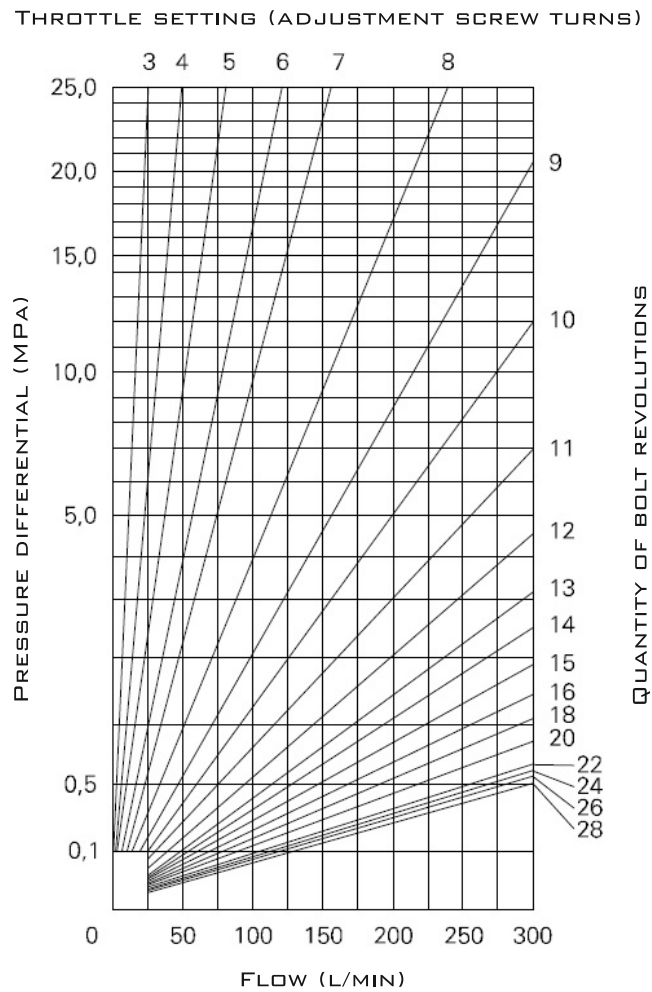

FLOW RESISTANCE CURVE FOR THE CHECK VALVE

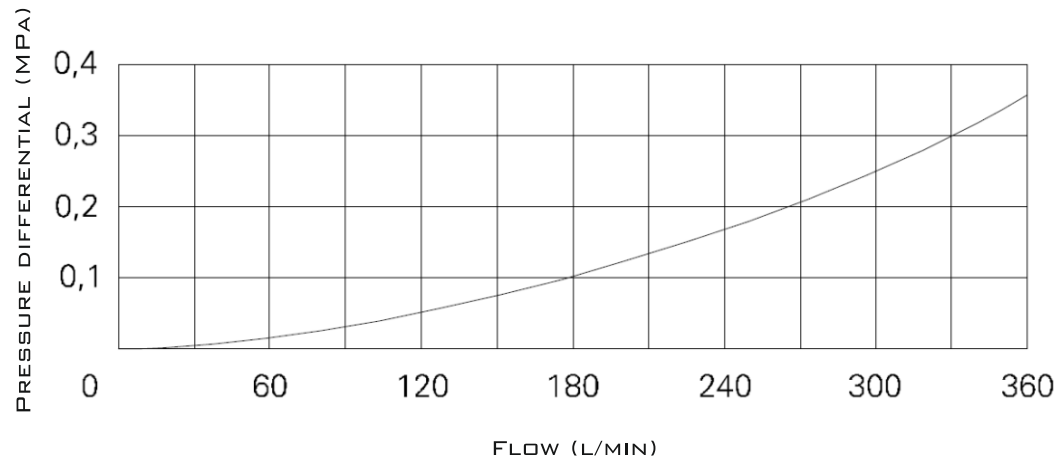




VALVOLE DI FLUSSO

Z2FS22

MODULAR THROTTLE/CHECK VALVES

SUBPLATE INSTALLATION DIMENSIONS

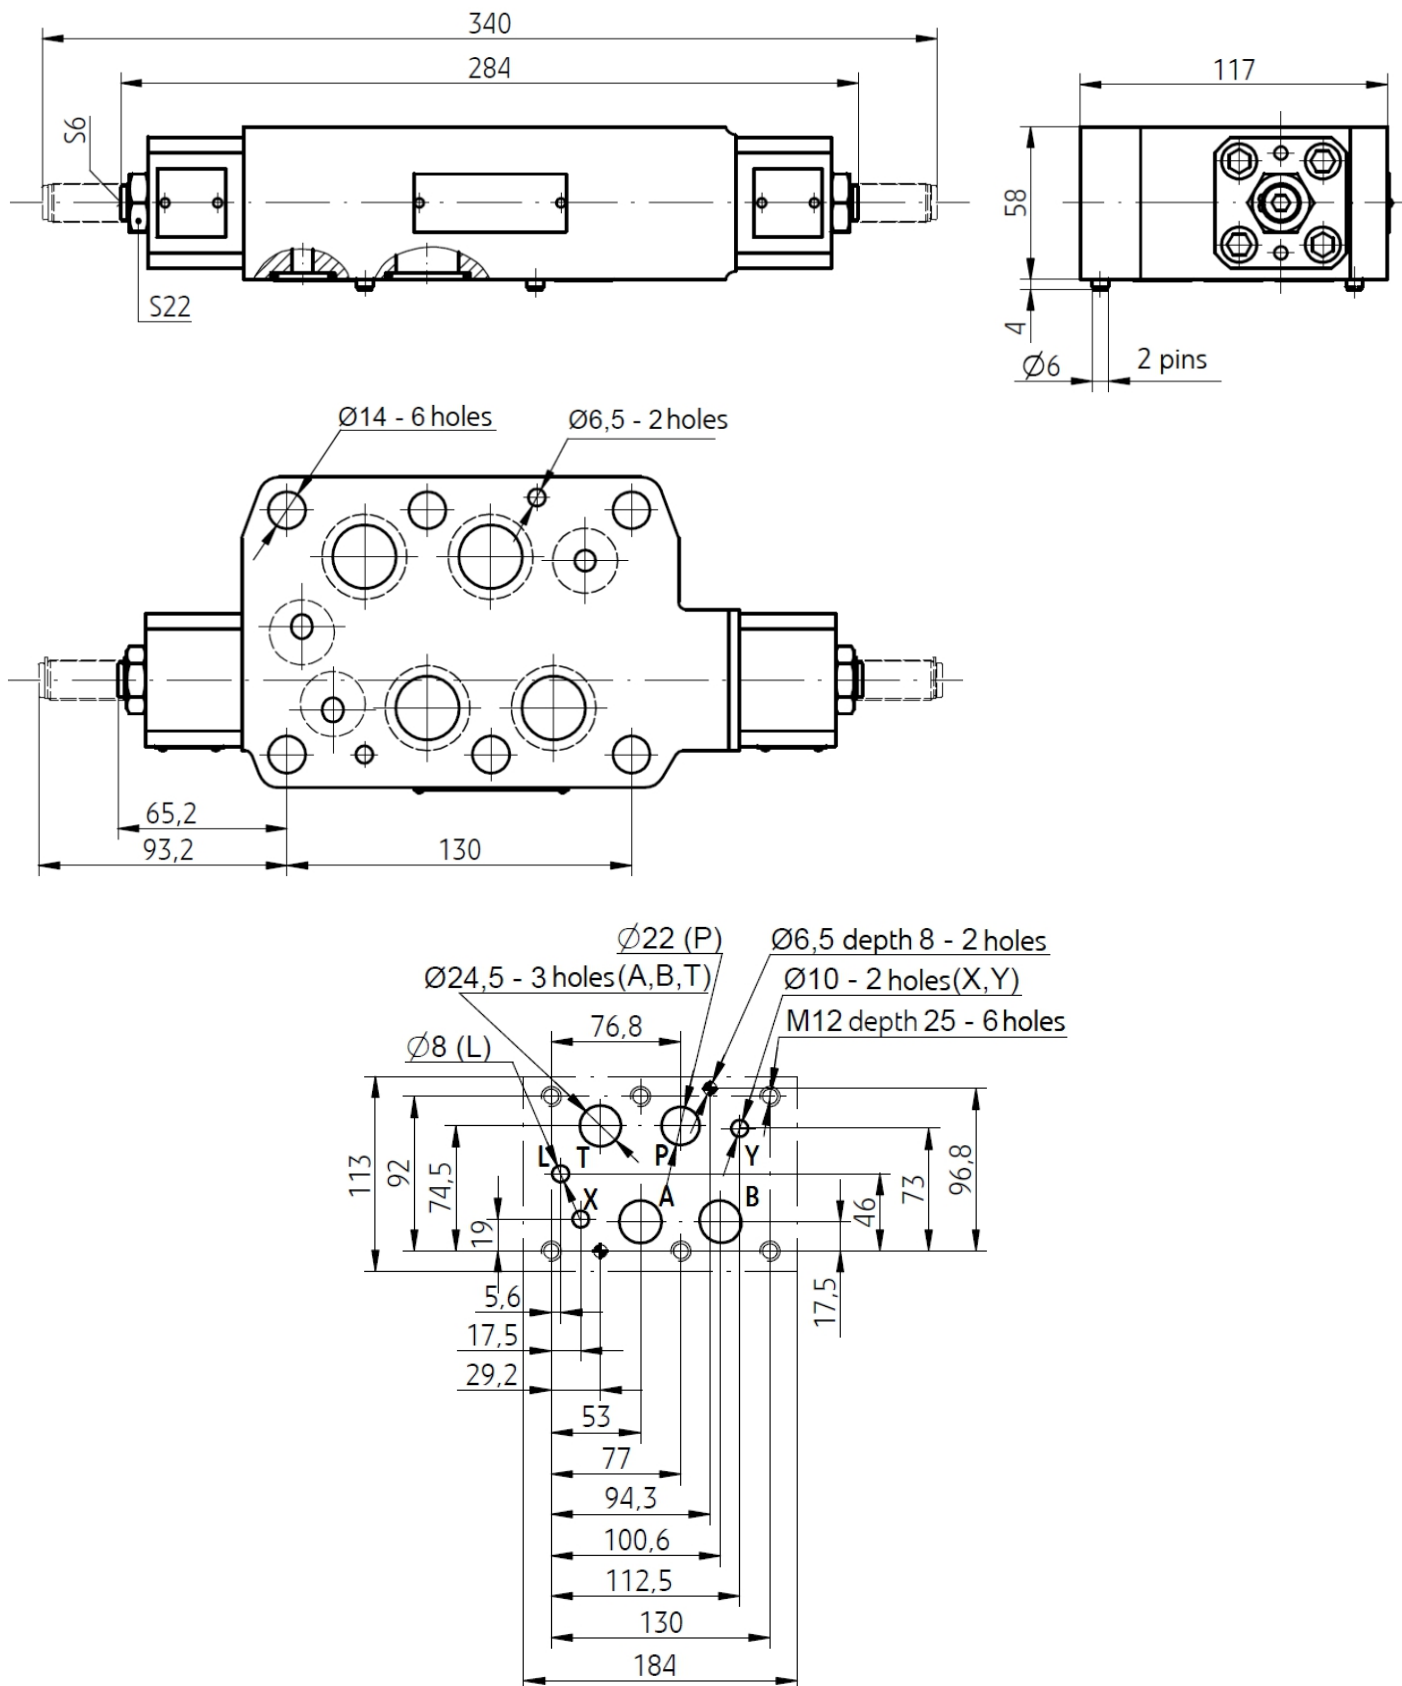

Z2FS22		VALVOLE DI FLUSSO	
MODULAR THROTTLE/CHECK VALVES			

ORDER CODE

Z2FS	22				
------	----	--	--	--	--

22=22 SIZE

3X=30-39 SERIES

S=INPUT THROTTLE
S2=OUTPUT THROTTLE

ADDITIONAL REMARKS

NO CODE=NBR SEALS
V=FKM SEALS