


VALVOLA PER SEMINATRICE SEGNAFILE SEMPLICE EFFETTO
VALVE FOR ROW MARKER ON SEEDING MACHINE



SCHEMA IDRAULICO
HYDRAULIC DIAGRAM

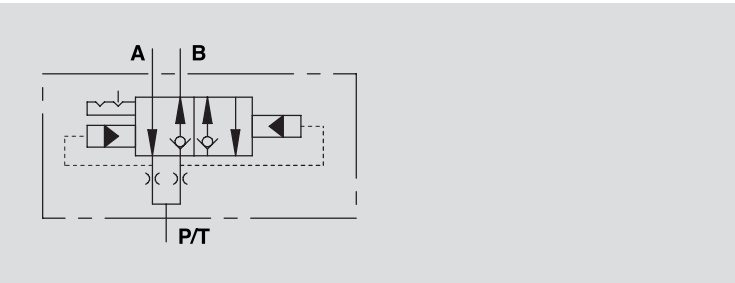

IMPIEGO:
Valvola utilizzata su macchine seminatrici per movimentare i segnafile. Alimentando e scaricando la bocca P/T si permette l'inversione automatica della salita/discesa di 2 cilindri singolo o doppio effetto.

MATERIALI E CARATTERISTICHE:
Corpo: acciaio zincato.
Componenti interni: acciaio temprato termicamente e rettificato.
Guarnizioni: BUNA N standard.
Tenuta: trafilemento trascurabile.

MONTAGGIO:
Collegare P/T all'alimentazione e A e B ai cilindri.


A RICHIESTA:
E' possibile fornire la valvola con le bocche A, B, P/T con:
• riduzione femmina G1/4"

USE AND OPERATION:
This type of valve is used on seeding machines to control the row marker. It allows the automatic ascent/descent inversion of single and double effect actuators, loading and unloading port P/T.

MATERIALS AND FEATURES:
Body: zinc-plated steel.
Internal parts: hardened and ground steel.
Seals: BUNA N standard.
Leakage: Minimal leakage.

CONNECTIONS:
Connect P/T to the supply and A and B to the actuator.

ON REQUEST:
The valve can be supplied with:
• G 1/4" female adapter

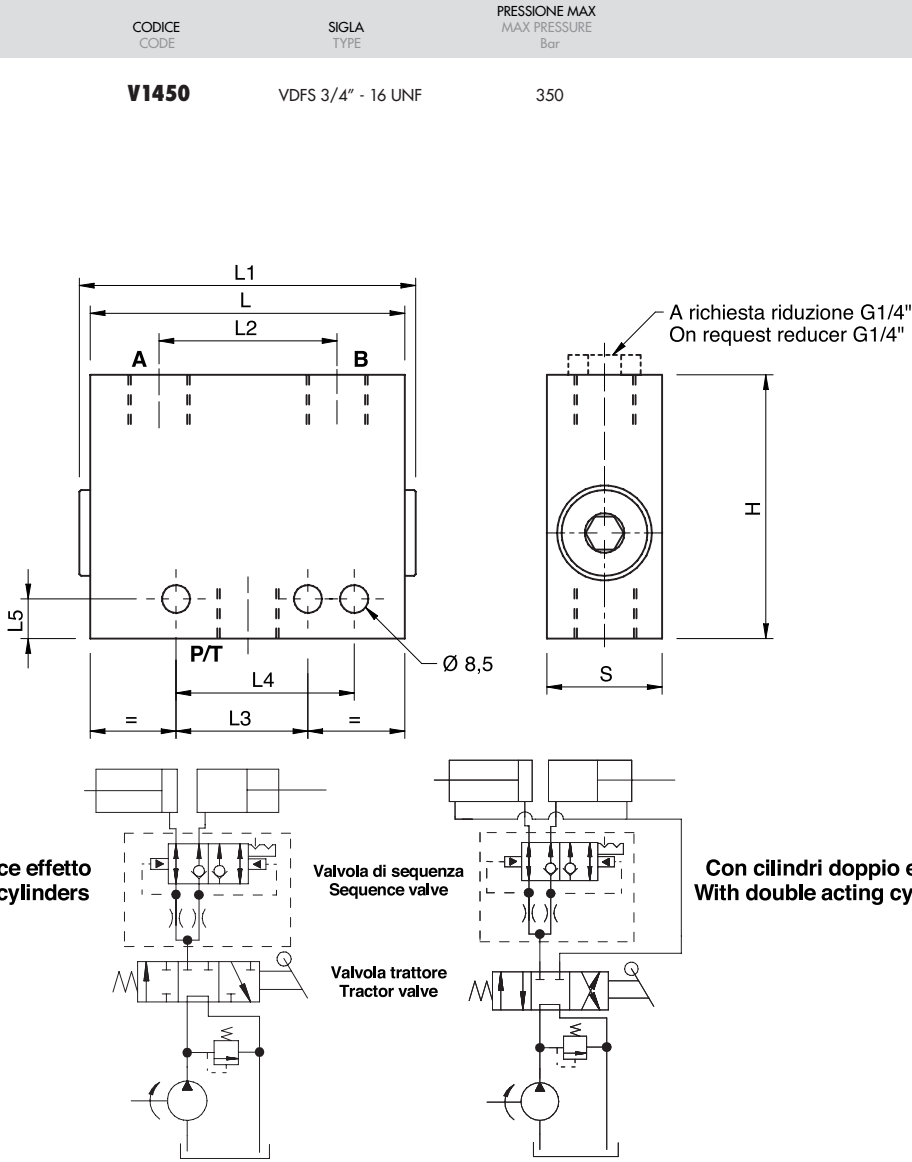

CODICE CODE	SIGLA TYPE	A - B P / T SAE	L mm	L1 mm	L2 mm	L3 mm	L4 mm	L5 mm	H mm	S mm	PESO WEIGHT Kg.
V1450	VDFS 3/4" - 16 UNF	3/4" - 16	94	102	54	40	54	12	80	35	1,830