

XV-1P

"HY" TYPE PUMP

Ø32 BODY-SHAPED FLANGE - MILLED SHANK

X	1	P	25	52	D	B	B	A
---	---	---	----	----	---	---	---	---

Series	X	series XV
Group	1	group 1
Category	P	unidirectional pump
Displacement	25	3.8
Flange	52	Ø32 HY right rotation
Shaft	D	CF002 - Milled shank ø10 - thk.5
Body	IN	B inlet - 3/8" GAS
	OUT	B outlet - 3/8" GAS
Cover	A	standard



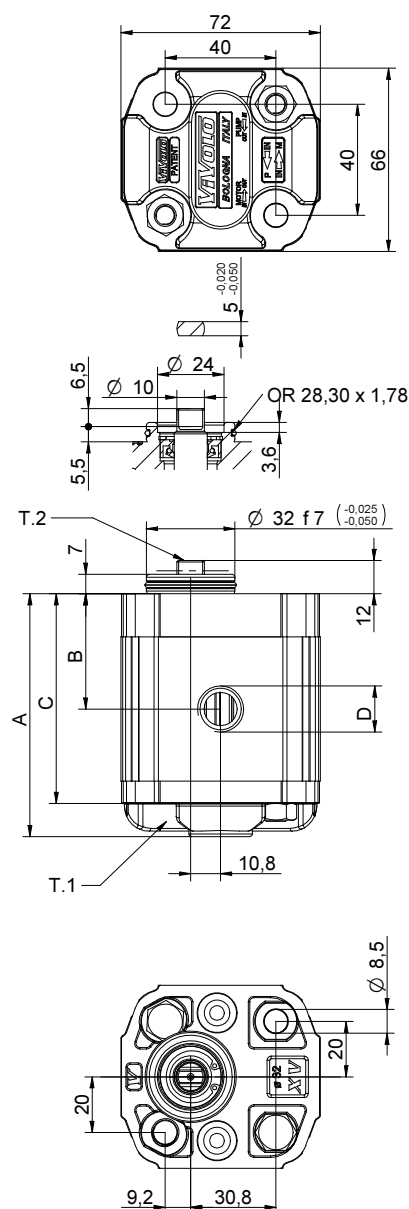
XP140

Technical data table											
TYPE	Displacement	Max. Pressure		CODE							
	cm3/rev	P1 bar	P3 bar	 Left rotation				 Right rotation			
XV-1P/0.9	0,91	240	280	X 1 P 16 51	D B B A	X 1 P 16 52	D B B A				
XV-1P/1.2	1,17	250	290	X 1 P 17 51	D B B A	X 1 P 17 52	D B B A				
XV-1P/1.7	1,56	250	290	X 1 P 18 51	D B B A	X 1 P 18 52	D B B A				
XV-1P/2.2	2,08	250	290	X 1 P 20 51	D B B A	X 1 P 20 52	D B B A				
XV-1P/2.6	2,60	250	300	X 1 P 21 51	D B B A	X 1 P 21 52	D B B A				
XV-1P/3.2	3,12	250	300	X 1 P 23 51	D B B A	X 1 P 23 52	D B B A				
XV-1P/3.8	3,64	250	300	X 1 P 25 51	D B B A	X 1 P 25 52	D B B A				
XV-1P/4.3	4,16	250	300	X 1 P 27 51	D B B A	X 1 P 27 52	D B B A				
XV-1P/4.9	4,94	250	300	X 1 P 29 51	D B B A	X 1 P 29 52	D B B A				
XV-1P/5.9	5,85	250	300	X 1 P 31 51	D B B A	X 1 P 31 52	D B B A				
XV-1P/6.5	6,50	250	300	X 1 P 32 51	D B B A	X 1 P 32 52	D B B A				
XV-1P/7.8	7,54	220	260	X 1 P 34 51	D B B A	X 1 P 34 52	D B B A				
XV-1P/9.8	9,88	190	230	X 1 P 36 51	D B B A	X 1 P 36 52	D B B A				

P1) Max. working pressure - P3) Max. peak pressure

For heavy-duty applications, it is recommended to check the admissible torque of the shaft

Dimensions table						
TYPE	Weight	A	B	C	D	D
	kg	mm	mm	mm	IN	OUT
XV-1P/0.9	0,950	77,1	36,3	65,1	3/8" BSPP	3/8" BSPP
XV-1P/1.2	0,970	78,0	36,8	66,0	3/8" BSPP	3/8" BSPP
XV-1P/1.7	1,010	79,5	37,5	67,5	3/8" BSPP	3/8" BSPP
XV-1P/2.2	1,030	81,5	38,5	69,5	3/8" BSPP	3/8" BSPP
XV-1P/2.6	1,060	83,5	39,5	71,5	3/8" BSPP	3/8" BSPP
XV-1P/3.2	1,090	85,5	40,5	73,5	3/8" BSPP	3/8" BSPP
XV-1P/3.8	1,120	87,5	41,5	75,5	3/8" BSPP	3/8" BSPP
XV-1P/4.3	1,170	89,5	42,5	77,5	3/8" BSPP	3/8" BSPP
XV-1P/4.9	1,200	92,5	44,0	80,5	3/8" BSPP	3/8" BSPP
XV-1P/5.9	1,260	96,0	45,8	84,0	3/8" BSPP	3/8" BSPP
XV-1P/6.5	1,300	97,5	47,0	85,5	3/8" BSPP	3/8" BSPP
XV-1P/7.8	1,360	102,5	49,0	90,5	3/8" BSPP	3/8" BSPP
XV-1P/9.8	1,500	111,5	53,5	99,5	3/8" BSPP	3/8" BSPP



26/08/04 X1P25520R8A dft











T.1 = 24.5÷29.4 [Nm] - screw tightening torque M8

$T.2 = 13.8 \text{ [Nm]}$ - admissible shaft torque (N.B. When choosing a shaft, always check the admissible torque).

Vivoil Oleodinamica Vivolo s.r.l. - Sole Shareholder Company - via Leone Ginzburg 2-4 40054 Budrio (BO) Italy tel: +39 051 803689 fax: +39 051 800061		
XP140	www.vivoil.com - english	02/07/2009

XV-1P

Table showing standard flange and thread combinations available in stock

Body (threads/flanges)													
	A		B		C		D		E		F		G
	H		I		J	Closed Body	Z						