

unidirectional pump - series XV

STANDARD PUMP
ø22 FLANGE - PARALLEL SHAFT

XV-OP

X 0 P 06 02 A B B A

Series	X	series XV
Group	0	group 0
Category	P	unidirectional pump
Displacement	06	0.76
Flange	02	Ø22 right rotation
Shaft	A	CI001 - Parallel ø7 - M7x1 - key thk. 2
Body	IN	B inlet - 1/4" GAS
	OUT	B outlet - 1/4" GAS
Cover	A	standard




XP001

Technical data table						
TYPE	Displacement	Max. Pressure		CODE		
	cm3/rev	P1 bar	P3 bar	Left rotation		Right rotation
XV-OP/0.17	0,16	220	260	X 0 P 01 01	A B B A	X 0 P 01 02 A B B A
XV-OP/0.25	0,24	220	260	X 0 P 02 01	A B B A	X 0 P 02 02 A B B A
XV-OP/0.45	0,45	220	280	X 0 P 04 01	A B B A	X 0 P 04 02 A B B A
XV-OP/0.57	0,56	220	280	X 0 P 05 01	A B B A	X 0 P 05 02 A B B A
XV-OP/0.76	0,75	220	280	X 0 P 06 01	A B B A	X 0 P 06 02 A B B A
XV-OP/0.98	0,92	220	280	X 0 P 07 01	A B B A	X 0 P 07 02 A B B A
XV-OP/1.27	1,26	220	280	X 0 P 09 01	A B B A	X 0 P 09 02 A B B A
XV-OP/1.52	1,48	220	280	X 0 P 11 01	A B B A	X 0 P 11 02 A B B A
XV-OP/2.30	2,28	190	210	X 0 P 13 01	A B B A	X 0 P 13 02 A B B A

P1) Max. working pressure - P3) Max. peak pressure
For heavy-duty applications, it is recommended to check the admissible torque of the shaft

Dimensions table						
TYPE	Weight	A	B	C	D	D
	kg	mm	mm	mm	IN	OUT
XV-OP/0.17	0,400	55,8	26,2	46,8	1/4" BSPP	1/4" BSPP
XV-OP/0.25	0,410	56,4	26,5	47,4	1/4" BSPP	1/4" BSPP
XV-OP/0.45	0,420	58,0	27,3	49,0	1/4" BSPP	1/4" BSPP
XV-OP/0.57	0,430	59,0	27,8	50,0	1/4" BSPP	1/4" BSPP
XV-OP/0.76	0,440	60,5	28,5	51,5	1/4" BSPP	1/4" BSPP
XV-OP/0.98	0,460	62,0	29,3	53,0	1/4" BSPP	1/4" BSPP
XV-OP/1.27	0,480	64,5	30,5	55,5	1/4" BSPP	1/4" BSPP
XV-OP/1.52	0,500	66,5	31,5	57,5	1/4" BSPP	1/4" BSPP
XV-OP/2.30	0,560	72,5	34,5	63,5	1/4" BSPP	1/4" BSPP

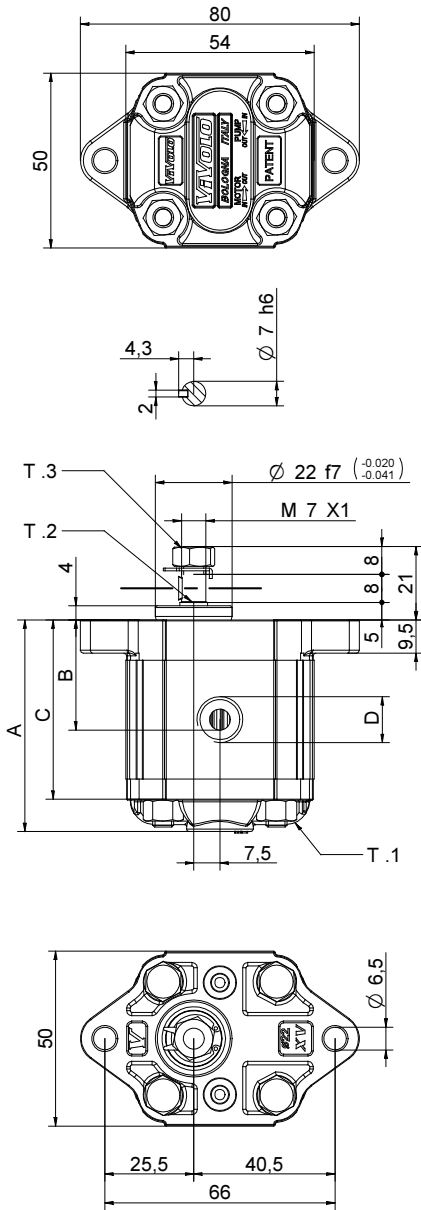

07/12/04 XP0602ABBA.dft

T.1 = 11.7±13.7 [Nm] - screw tightening torque M6
T.2 = 2.1 [Nm] - admissible shaft torque (N.B. When choosing a shaft, always check the admissible torque).
T.3 = 11.5 [Nm] - torque wrench setting 11

Table of variations

XV-OP

Standard ø22 FLANGE

Standard ø22 FLANGE				Shaft				Cover			
Left rotation			Right rotation					Left rotation	Right rotation		
		01		02	CI001 - Parallel T.2 = 2.1 [Nm]		A	CF001 - Milled shank T.2 = 9.2 [Nm]			A
		03		04	CF005 - Milled shank T.2 = 8.4 [Nm]		F	CO001 - Tapered T.2 = 21.9 [Nm]			B
		05		06							C
		07		08							D
											N
											O

Displacement	
TYPE	CODE
XV-OP/0.17	01
XV-OP/0.25	02
XV-OP/0.45	04
XV-OP/0.57	05
XV-OP/0.76	06
XV-OP/0.98	07
XV-OP/1.27	09
XV-OP/1.52	11
XV-OP/2.30	13

Standard bodies			
Displacement cm3/rev	Standard threads		
0.17	B - B	Z - B	Z - Z
0.25	B - B	Z - B	Z - Z
0.45	B - B	Z - B	Z - Z
0.57	B - B	Z - B	Z - Z
0.76	B - B	Z - B	Z - Z
0.98	B - B	Z - B	Z - Z
1.27	B - B	Z - B	Z - Z
1.52	B - B	Z - B	Z - Z
2.30	B - B	Z - B	Z - Z

Table showing standard flange and thread combinations available in stock

Body (threads/flanges)			
	A		B
	C		D
	E		F
	G		H
	I		Z

Body (threads/flanges)			
	A		B
	C		D
	E		F
	G		H
	I		Z

Vivoil Oleodinamica Vivolo s.r.l. - Sole Shareholder Company - via Leone Ginzburg 2-4 40054 Budrio (BO) Italy tel: +39 051 803689 fax: +39 051 800061		
XP001	www.vivoil.com - english	02/07/2009