

unidirectional pump - series XV

STANDARD PUMP
ø22 FLANGE - PARALLEL SHAFT

XV-OP

X 0 P 06 02 A B B A




Series	X	series XV
Group	0	group 0
Category	P	unidirectional pump
Displacement	06	0.76
Flange	02	Ø22 right rotation
Shaft	A	CI001 - Parallel ø7 - M7x1 - key thk. 2
Body	IN	B inlet - 1/4" GAS
	OUT	B outlet - 1/4" GAS
Cover	A	standard



XP001

Technical data table							
TYPE	Displacement	Max. Pressure		CODE			
	cm3/rev	P1 bar	P3 bar	Left rotation		Right rotation	
XV-OP/0.17	0,16	220	260	X 0 P 01 01	A B B A	X 0 P 01 02	A B B A
XV-OP/0.25	0,24	220	260	X 0 P 02 01	A B B A	X 0 P 02 02	A B B A
XV-OP/0.45	0,45	220	280	X 0 P 04 01	A B B A	X 0 P 04 02	A B B A
XV-OP/0.57	0,56	220	280	X 0 P 05 01	A B B A	X 0 P 05 02	A B B A
XV-OP/0.76	0,75	220	280	X 0 P 06 01	A B B A	X 0 P 06 02	A B B A
XV-OP/0.98	0,92	220	280	X 0 P 07 01	A B B A	X 0 P 07 02	A B B A
XV-OP/1.27	1,26	220	280	X 0 P 09 01	A B B A	X 0 P 09 02	A B B A
XV-OP/1.52	1,48	220	280	X 0 P 11 01	A B B A	X 0 P 11 02	A B B A
XV-OP/2.30	2,28	190	210	X 0 P 13 01	A B B A	X 0 P 13 02	A B B A

P1) Max. working pressure - P3) Max. peak pressure
For heavy-duty applications, it is recommended to check the admissible torque of the shaft

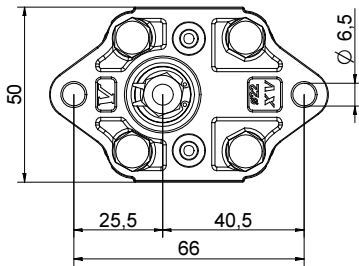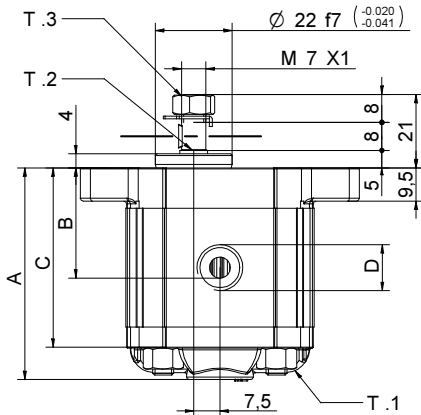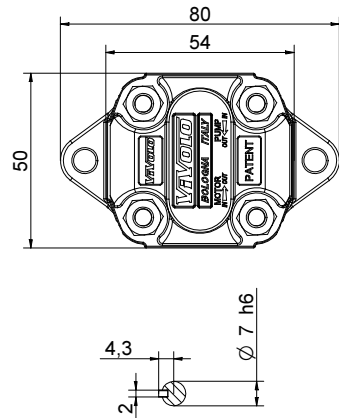

07/12/04 XP0602ABBA.dft

T.1 = 11.7±13.7 [Nm] - screw tightening torque M6
T.2 = 2.1 [Nm] - admissible shaft torque (N.B. When choosing a shaft, always check the admissible torque).
T.3 = 11.5 [Nm] - torque wrench setting 11

Table of variations

XV-OP

Standard ø22 FLANGE

Standard ø22 FLANGE			
Left rotation		Right rotation	
	01		02
	03		04
	05		06
	07		08

Shaft	
CI001 - Parallel T.2 = 2.1 [Nm] 	A
CF001 - Milled shank T.2 = 9.2 [Nm] 	B
CF005 - Milled shank T.2 = 8.4 [Nm] 	F
CO001 - Tapered T.2 = 21.9 [Nm] 	E

Cover		
Left rotation	Right rotation	
		A
		B
		C
		D
		N
		O

Displacement	
TYPE	CODE
XV-0P/0.17	01
XV-0P/0.25	02
XV-0P/0.45	04
XV-0P/0.57	05
XV-0P/0.76	06
XV-0P/0.98	07
XV-0P/1.27	09
XV-0P/1.52	11
XV-0P/2.30	13

Standard bodies				
Displacement cm3/rev	Standard threads			
0.17	B - B	Z - B	Z - Z	
0.25	B - B	Z - B	Z - Z	
0.45	B - B	Z - B	Z - Z	
0.57	B - B	Z - B	Z - Z	
0.76	B - B	Z - B	Z - Z	
0.98	B - B	Z - B	Z - Z	
1.27	B - B	Z - B	Z - Z	
1.52	B - B	Z - B	Z - Z	
2.30	B - B	Z - B	Z - Z	