





MOBILE Series  
MOBILE S3-A3

Dimensioni    Dimensions

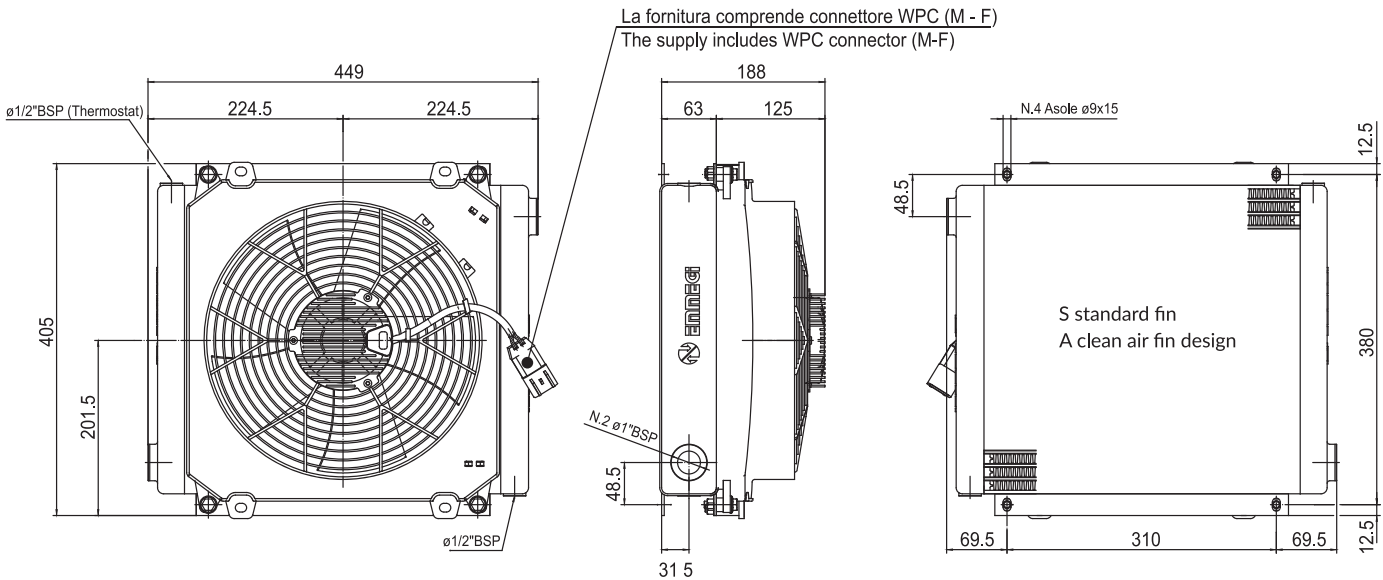


| CODICE<br>CODE | Dati tecnici / Technical Data |      |      |      |       |        |    |     |      |
|----------------|-------------------------------|------|------|------|-------|--------|----|-----|------|
|                | V                             | kW   | A    | rpm  | Ø Fan | dB (A) | IP | It  | kg   |
| 2MS312###      | 12V DC                        | 0,19 | 15,6 | 2840 | 305   | 74     | 68 | 1,6 | 10,5 |
| 2MS324###      | 24V DC                        | 0,18 | 7,6  | 3040 | 305   | 79     | 68 | 1,6 | 10,5 |
| 2MA312###      | 12V DC                        | 0,19 | 15,8 | 3110 | 305   | 74     | 68 | 1,6 | 10,5 |
| 2MA324###      | 24V DC                        | 0,16 | 6,7  | 3124 | 305   | 79     | 68 | 1,6 | 10,5 |

Diagramma rendimento    Performance diagram

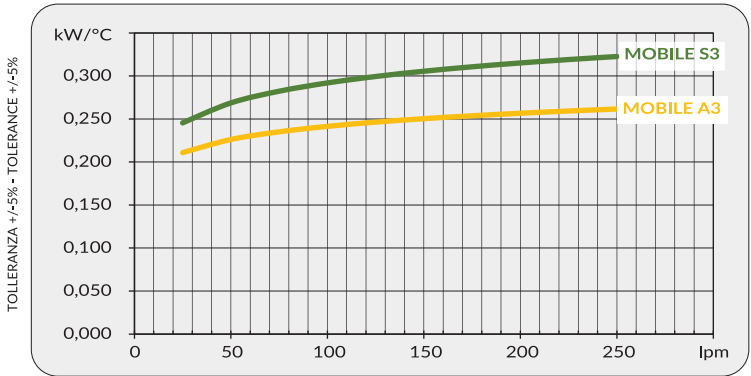

Perdite di carico    Pressure drop (@30cSt)

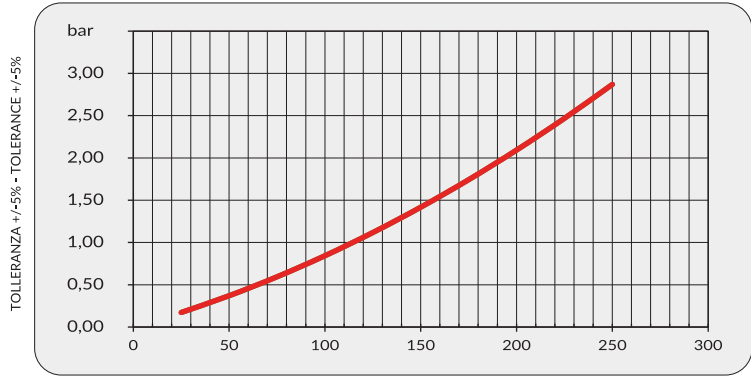

Fattore di correzione-F-(perdite di carico)    Correction factor-F-(pressure drop)

|     |     |      |      |    |     |     |     |     |     |     |     |
|-----|-----|------|------|----|-----|-----|-----|-----|-----|-----|-----|
| cSt | 10  | 15   | 20   | 30 | 40  | 50  | 60  | 80  | 100 | 200 | 300 |
| F   | 0,5 | 0,65 | 0,77 | 1  | 1,2 | 1,4 | 1,6 | 1,9 | 2,1 | 3,3 | 4,3 |