

ROTATOR FHR 6FD1

STATIC
LOAD

60 kN

DYNAMIC
LOAD

30 kN

TORQUE
at 25MPa

1850 Nm

OILFLOW

25 l/min

WEIGHT

45 kg



**DOUBLE
BEARING**



**FORGED
STEEL**

Grapple open
G1/2" Max 250 bar

Rotate left/right
G1/2" Max 250 bar

Rotator frame L80 ø35

Grapple close
G1/2" Max 300 bar

Rotator designed for intensive professional use and extended long lifetime


Rotator with two bearings to withstand compression and stretching forces

Grapple open
G1/2"

Grapple close
G1/2"

Optional open/close channels

Robust and shock resistant steel flange for fitting the grapple in standard pattern with 6xM16 bolts

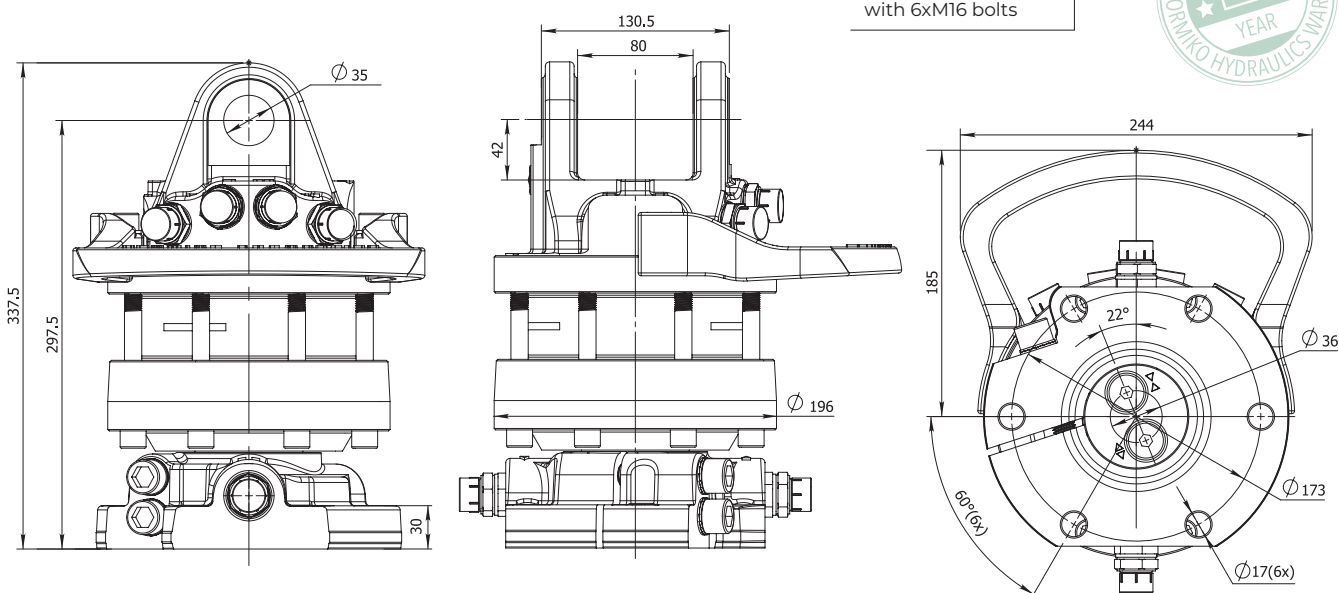

FORESTRY

AGRICULTURE

CONSTRUCTION

GENERAL CARGO

RECYCLING

FORMIKO
HYDRAULICS

formiko.lv

39