



Description

DS3 Series Pressure Switch opens and closes electrical circuit depends on pressure increase or decrease. Working pressure is adjustable between 0,1 bar and 400 bar. System has adjustable feature while system is working. They can be used under all compressed air, liquids or gases.

- Compact and economic design
- NA/NC, Socket and fast-on connection options.
- Reproducibility of pressure switch in %3
- NBR, HNBR, VITON seal equipment.
- Body material stainless steel, brass, steel options.

Applications

- Hydraulic and mobile hydraulic
- Pneumatics
- Heavy Duty
- All compressed air, liquids or gases.

Technical Features

Mechanical Connection	: G1/4" , G1/8" , 1/4" BSPT , 1/8" BSPT , M10x1,0 , M12 x 1,5 , 1/8" NPT , 1/4" NPT
Reproducibility	: Within %1 of set pressure
Working Temperature (DIN EN 60068-2-27)	: -40 °C...+90 °C
Shock Test (DIN EN 60068-2-27:1993)	: 20 g (Test Time 30 min.)
Working Cycle	: 5 000 000 Cycle
Viscosity	: Between 10 ... 800 mm ² /sec

Notlar

These values are maximum values and they can not be used at the same me.

When you need to use the pressure switch in aggressive chemicals or fluids please contact with us.

You must stict to rules of clearence standarts Hydraulic oils (fluids). Use filtraon to blocking system errors. It is effecve for long working life of pressure switches. Please avoid using out of indicated values to have a long service from pressure switch


Order Codes

DS3	—	—	—	—	—			—	—
Model	Body	Leekageproof Type	Mechanic Connection Type	Electrical Connection Type	Pressure			Set Pressure	Pressure Conditions
					Code	Pressure Range (bar)	P _{max}		
DS3 Model Pressure Switch	Y Brass “MS58”	V VITON	A3 G1/4”	NA NO (NA) It is delivered with Fast-on teminal	002 012 100 200 400	0,2 ... 2 1 ... 12 5 ... 100 20 ... 200 50 ... 400	40 bar 40 bar 600 bar 600 bar 600 bar	If you need a product that adjusted before, you can write pressure value here.	D Dropping set pressure Y Rising set pressure If you indicated set pressure please indicate the pressure conditions
	Z Stainless “316 L” If you do not indicate any body type, It is delivered as zinc-plated stainless body	E EPDM H HNBR If you do not indicate any leekageproof type, It is delivered as “NBR”	A4 G1/8” S3 1/4” BSPT S4 1/8” BSPT B1 M10 x1,0 B3 M12x1,5 N3 1/8”NPT N4 1/4”NPT	NC NC (NK) It is delivered with Fast-on teminal FAC NO/NC It is delivered with Fast-on teminal DAC NO/NC It is delivered with DIN 43650 Soket					

Note:


Minimum order pieces of all prodcut whic is beginning with DS3 A3 ... codes. Order pieces must be 10 and multiples of 10.

Electrical Connection Types

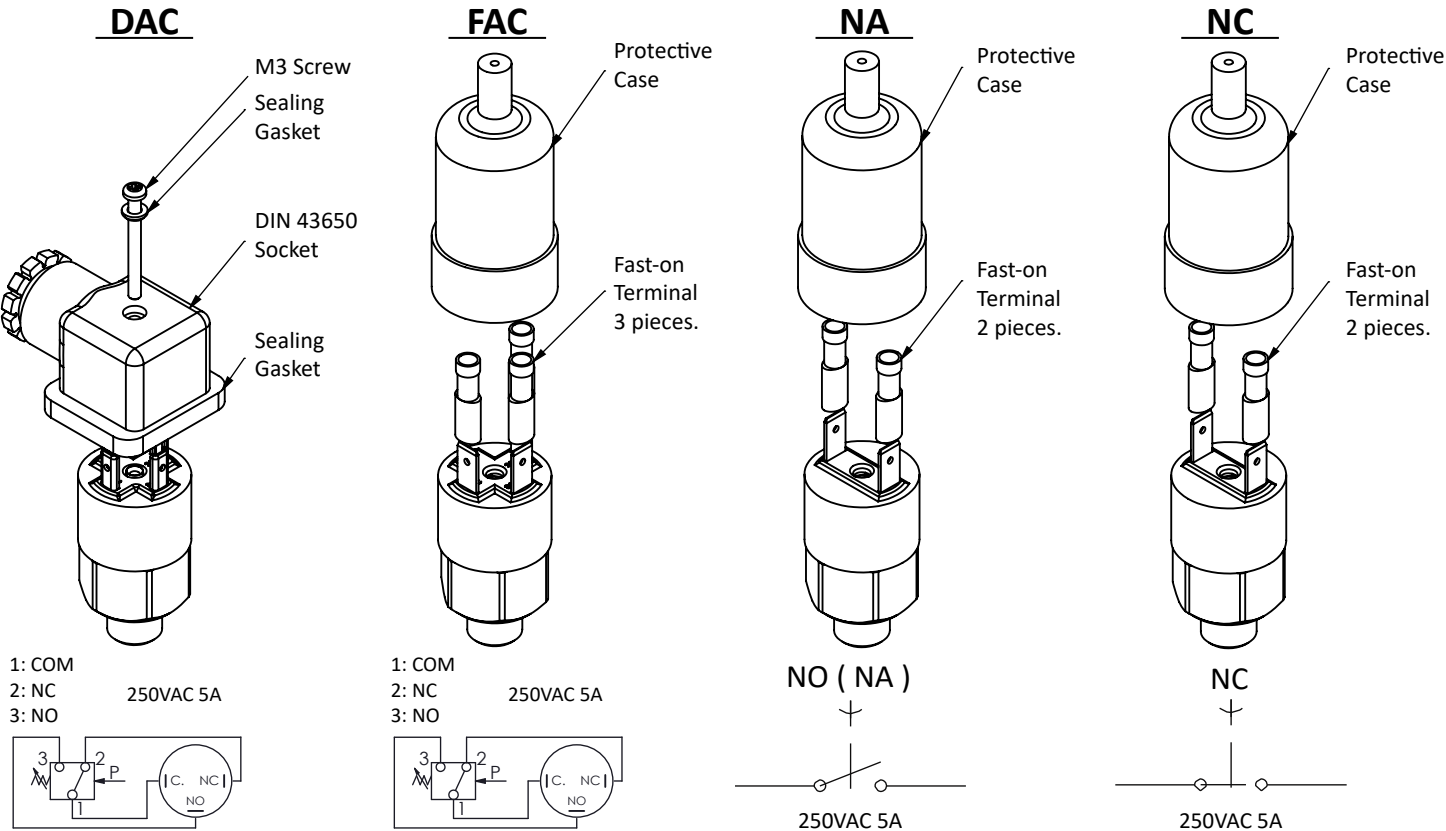


Pressure Differential Difference Graphics

Working Pressure : Adjustable between 0,2 bar 2 bar
System pressure Max. (Pmax) : 40 bar
Type : Diaphragm

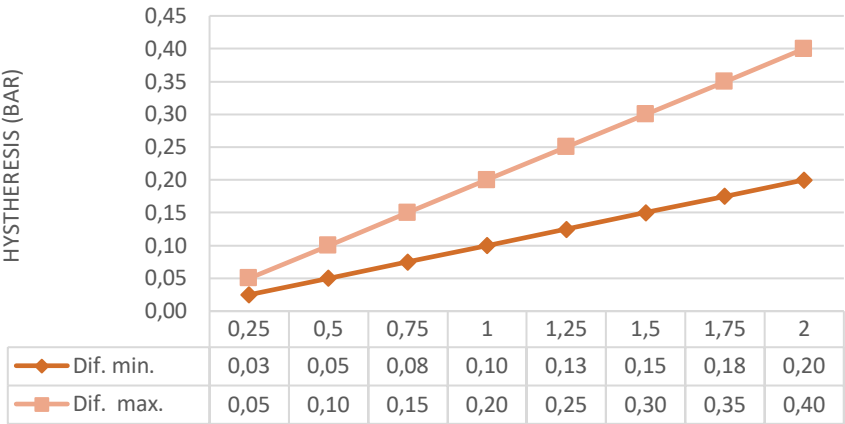


Working Pressure : Adjustable between 1 bar 12 bar
System Pressure Max. (Pmax) : 40 bar
Type : Diaphragm

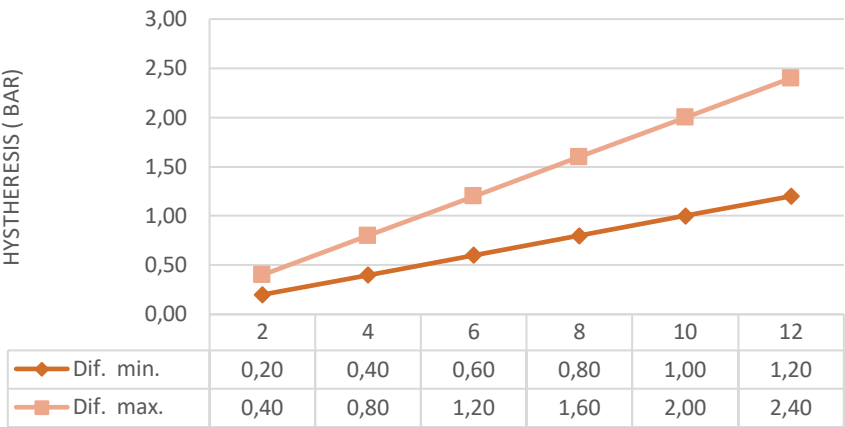


Pressure Differential Difference Graphics

Working Pressure : Adjustable between 10 bar 100 bar
System pressure Max. (Pmax) : 600 bar
Type : Piston

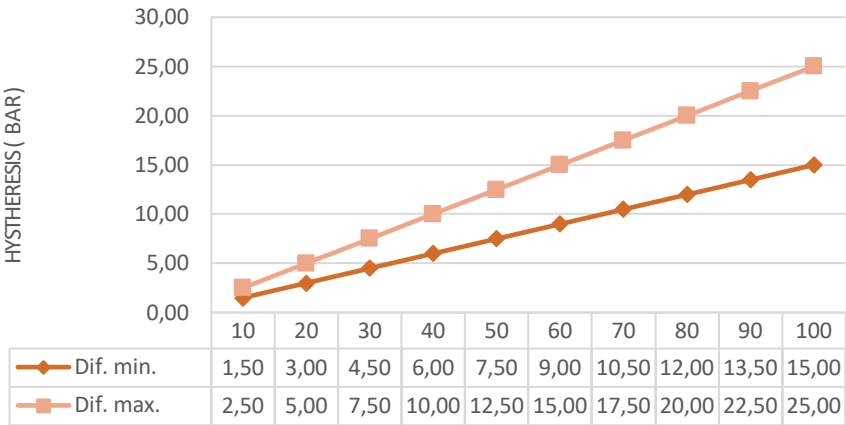


Working Pressure : Adjustable between 20 bar 200 bar
System Pressure Max. (Pmax) : 600 bar
Type : Piston

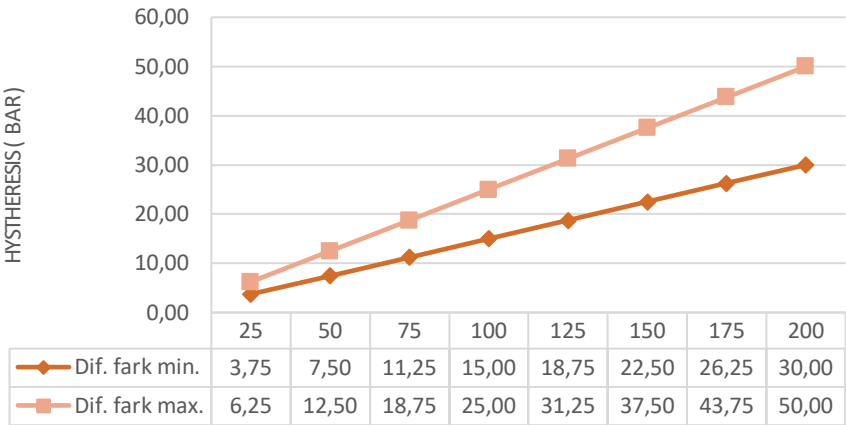

Pressure Differential Difference Graphics

Working Pressure : Adjustable between 20 bar 400 bar
System pressure Max. (Pmax) : 600 bar
Type : Piston

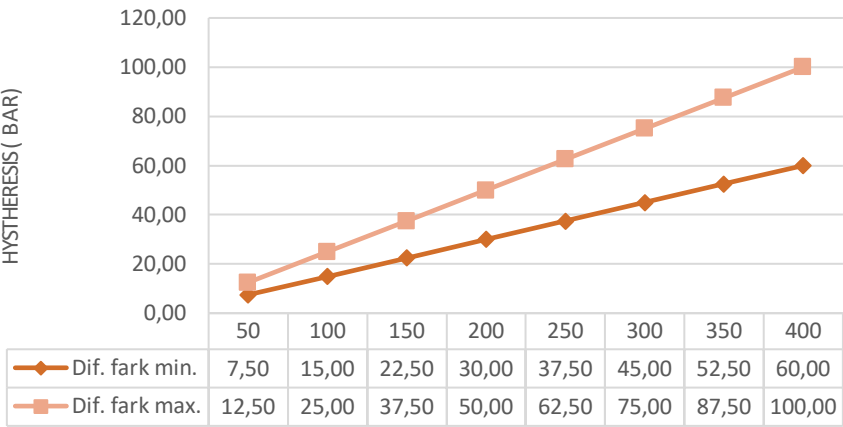

Technical Dimensions

