
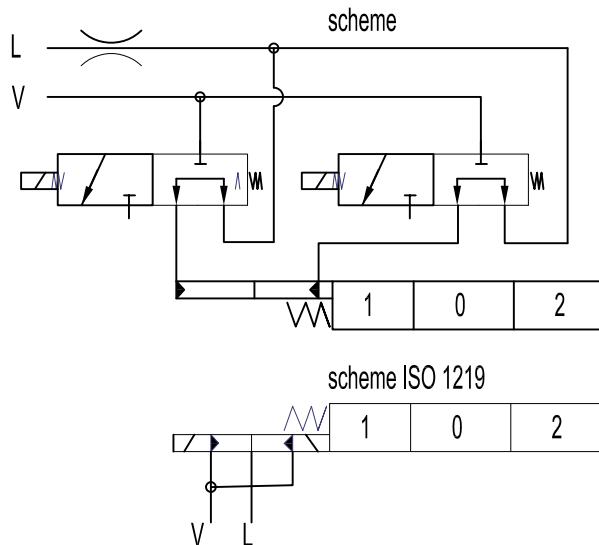


directional control valve P80

ED3 – electro-hydraulic control ON–OFF
Электрогидравлический контрол ON–OFF

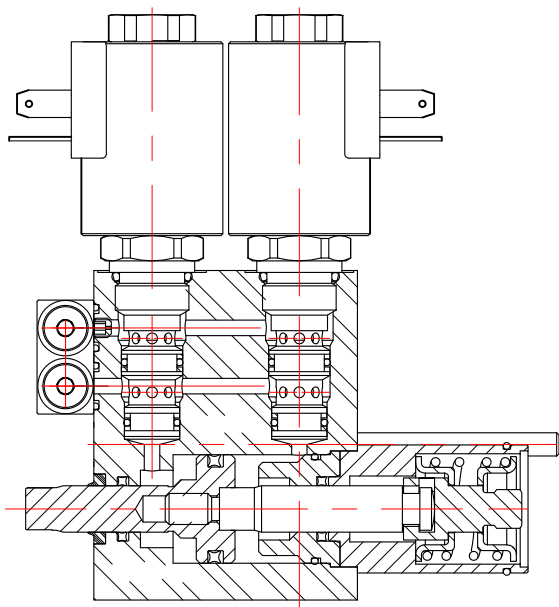

Operating pressure min 10 bar(145 psi)
Max operating pressure in L (T line) max 50 bar(725 psi)
25 bar(360 psi)

Ordering codes



3–way solenoid valve–SV08–33
coil P80ED3–G–12VDC
coil P80ED3–G–24VDC

Solenoid operating features

Nominal voltage tolerance ±10%
Power rating 24W
Duty cycle 100 %

Collector kit for external pilot and drain – CEED...(1,2,3 ...)

Колектор для внешнего питания управления и слив

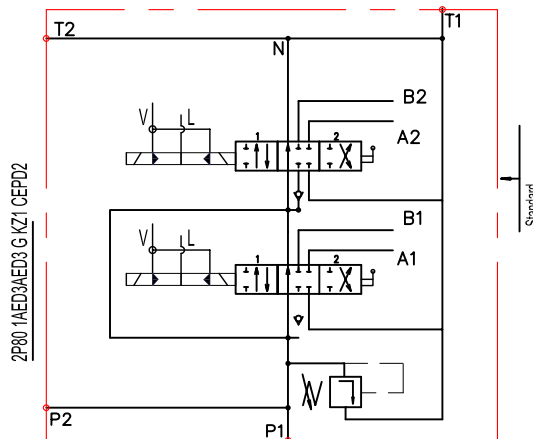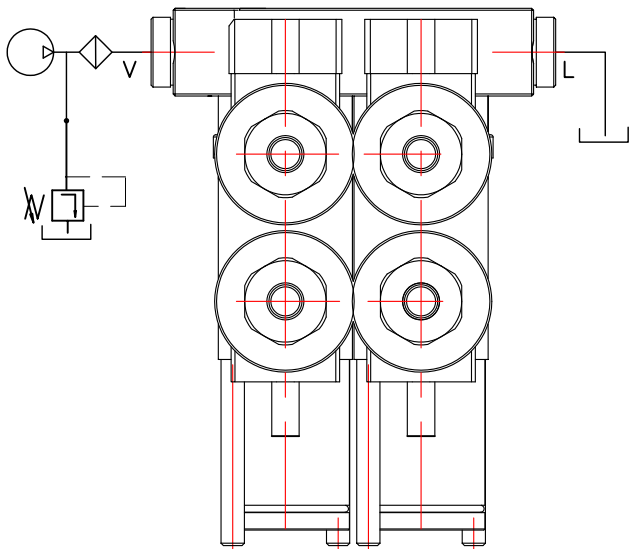


Ordering example

2P80 1A1ED3A1ED3 G KZ1–CEED2–12VDC


Ordering codes (BSP threads)

CEED1P80	Kit for 1 section
CEED2P80	Kit for 2 section
CEED3P80	Kit for 3 section
CEED480	Kit for 4 section
...	

3-wai solenoid valve-LSV2-08-3C-NNN
coil P40ED3-G-12VDC
coil P40ED3-G-24VDC

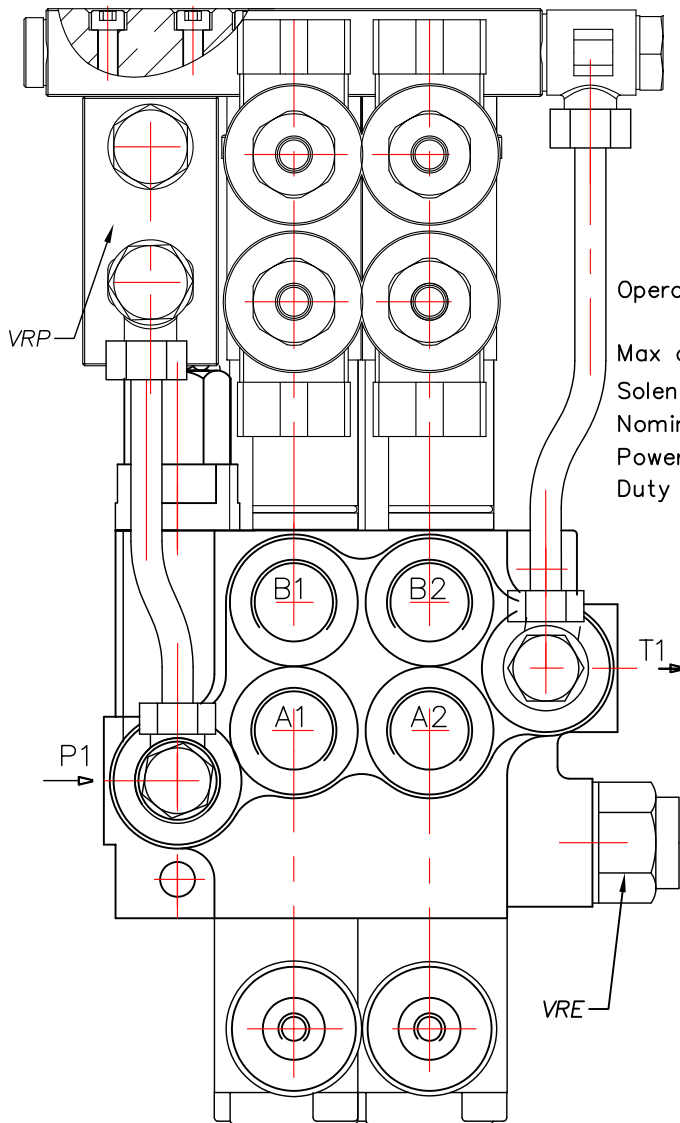

Operating pressure	min 10 bar(145 psi) max 50 bar(725 psi)
Max operating pressure in L (T line)	25 bar(360 psi)
Solenoid operating features	
Nominal voltage tolerance	±10%
Power rating	24W
Duty cycle	100 %

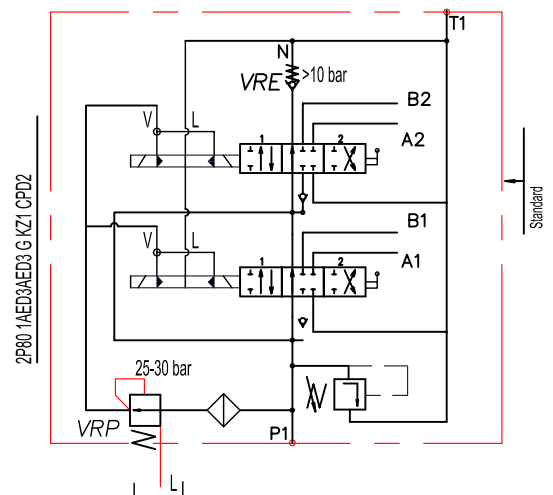

Ordering example

2P80 VRP 1A1ED3A1ED3 G KZ1-CED2-VRE-12VDC

Collector kit

CED1P80
CED2P80
CED3P80
CED480


• • • •

Ordering codes
BSP threads


Kit for 1 section
Kit for 2 section
Kit for 3 section
Kit for 4 sektion

Back pressure valve VRE-P80

Клапан подпорный на слив

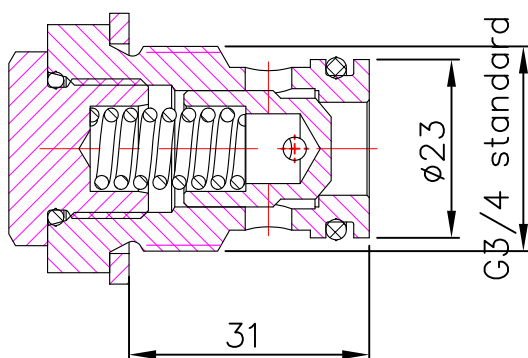

2 / 2

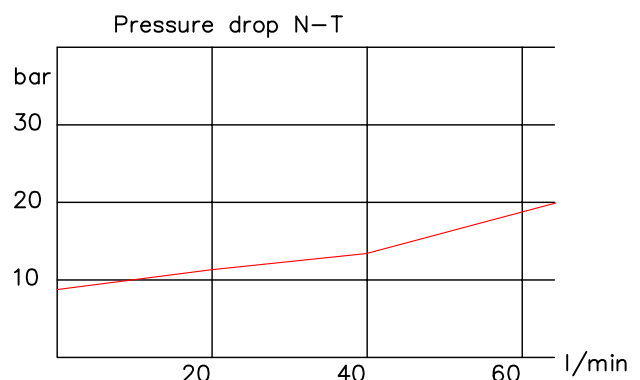

oct 2010