


AL-MOP-6

Diverter valve



IOW AmberLine
OW Hydraulics

Technical data

Model	AL-MOP-6
Max. flow rate (l/min)	50
Max. operating pressure (MPa)	25
Oil cleanliness	NAS1638 class 9 and ISO4406 class 20/18/15

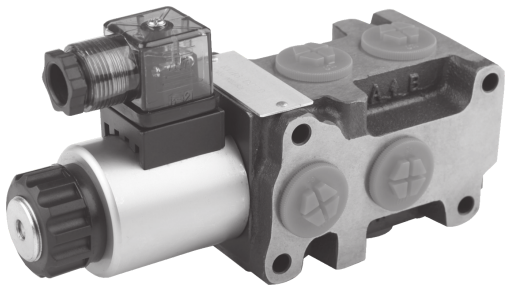

Technical data

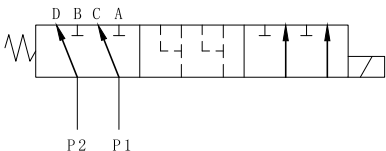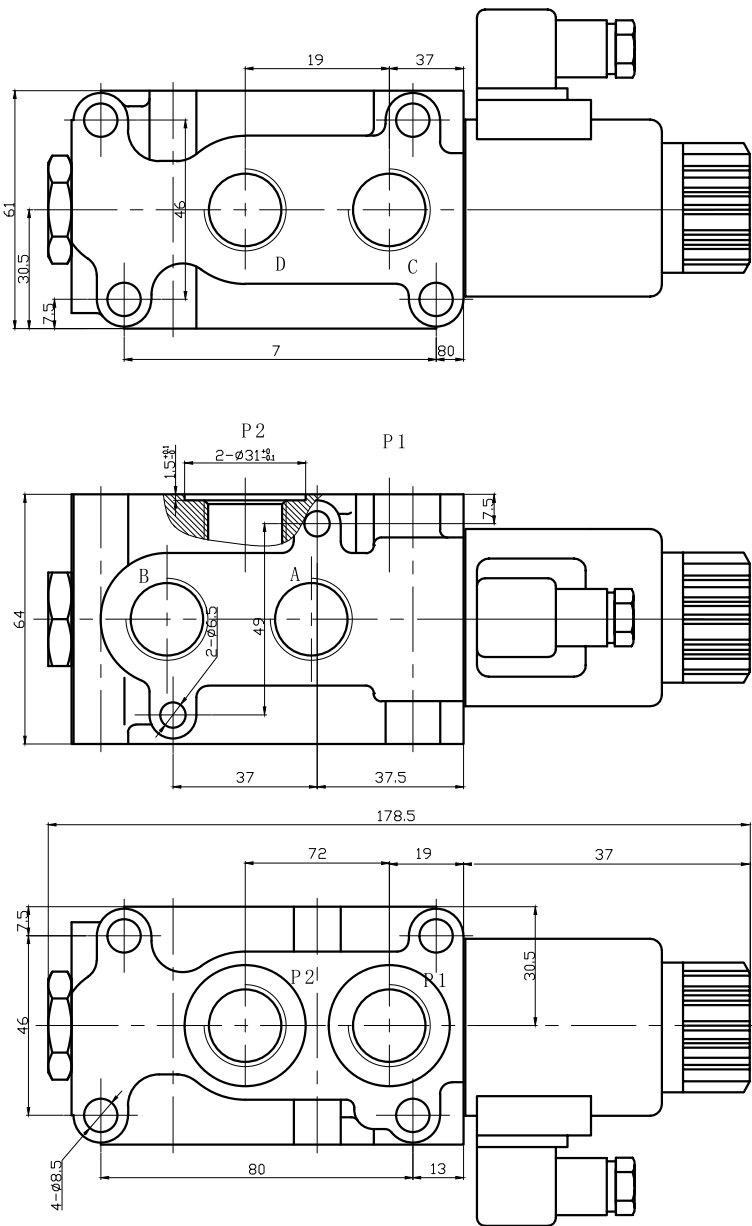

Ordering code

AL-MOP-6 - 1/2 - I - 12 - P

Model

Size 6

Threaded connectors 1/2", 3/4" BSP

Internal drainage

12=DC12V, 24=DC24V, **=without DC coils

P - phosphating, NP - nickel plated

IOW TRADE Sp. z o. o.
ul. Zwolenńska 17 04-761 Warszawa
Tel. +48 22 512 56 60; fax +48 22 512 56 69
iow@iow.pl www.iow.pl

IOW IOW TRADE
OW DRIVES HYDRAULICS FILTRATION

ТОВ "Промислова Гідравліка": <https://promhydraulic.com.ua/ua/>
Телефонуйте: +380 (95) 670-15-32, +380 (98) 533-91-67, +380 (96) 244-48-42