



WMM6 SERIES MANUALLY OPERATED DIRECTIONAL CONTROL VALVES ARE DIRECT TYPE DIRECTIONAL SPOOL VALVES. THESE VALVES ARE USED TO THE START, STOP AND DIRECTION OF FLOW. THIS SERIES WITH DETENT OR RETURN SPRING ARE AVAILABLE.

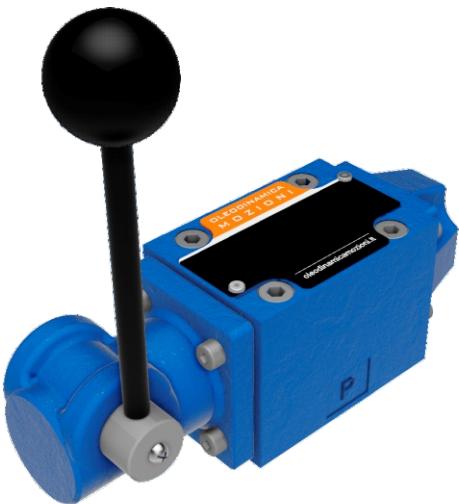

TECHNICAL DATA


SIZE		6
MAX. FLOW RATE (L/MIN)		60
OPERATING PRESSURE (MPa)	A, B, P PORTS	31.5
	T PORT	16
WEIGHT (KG)		1.5
VALVE BODY (MATERIAL)		CASTING PHOSPHATING SURFACE

CHARACTERISTIC CURVES

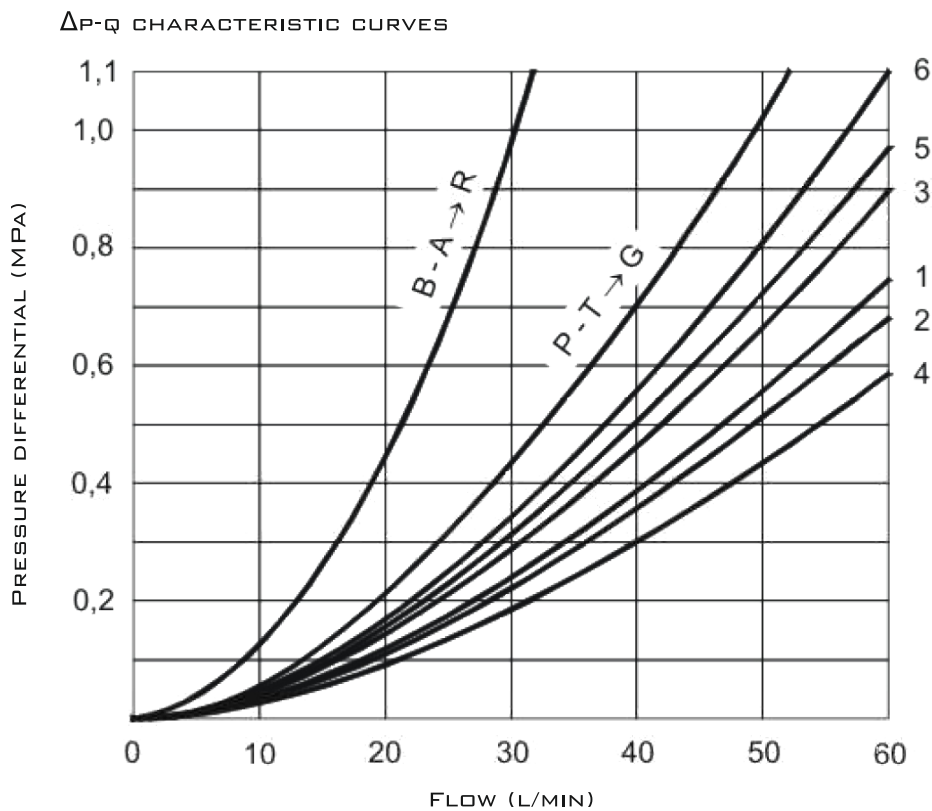

SPOOL SYMBOL	FLOW DIRECTION			
	P - A	P - B	A - T	B - T
A, B	3	3	-	-
C	1	1	3	1
D, Y	5	5	3	3
E	3	3	1	1
F	2	3	3	5
G	5	3	6	6
H	2	4	2	2
J, Q	1	1	2	1
L	1	1	2	2
M	2	4	3	3
P	2	3	3	5
R	5	5	4	-
T	5	3	6	6
U	3	1	3	3
V	1	2	1	1
W	1	1	2	2

SUBPLATE INSTALLATION DIMENSIONS

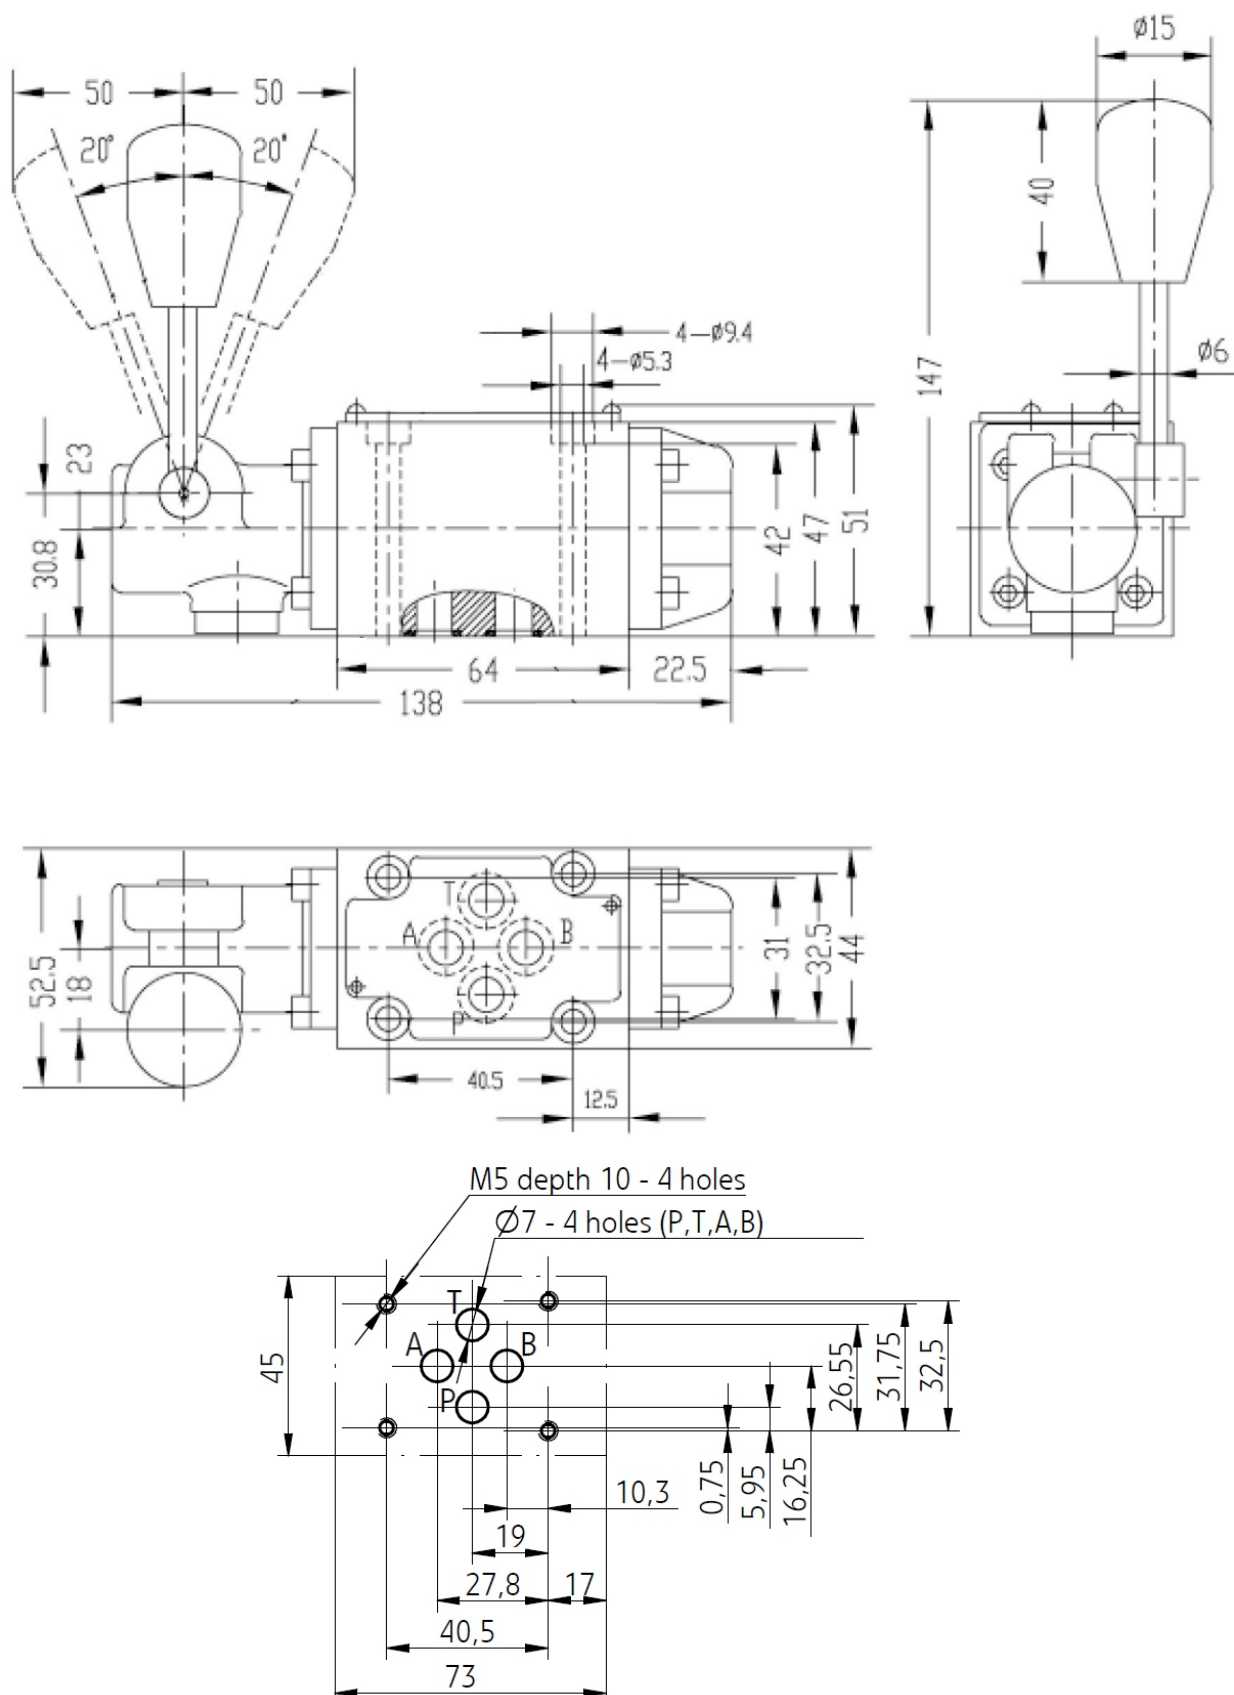

	DISTRIBUTORI OLEODINAMICI	WMM6																																																						
		MANUALLY OPERATED DIRECTIONAL CONTROL VALVES																																																						
ORDER CODE <table><tr><td></td><td>WMM</td><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>3=3-WAY 4=4-WAY</td><td colspan="2"></td><td></td><td></td><td></td><td></td><td></td><td> NO CODE=HANDLE ON SIDE OF PORT A L=HANDLE ON SIDE OF PORT B </td></tr><tr><td>6=6 SIZE</td><td colspan="2"></td><td></td><td></td><td></td><td></td><td></td><td> NO CODE=MINERAL SUBSTANCE HYDRAULIC OIL V=PHOSPHATE EATER HYDRAULIC OIL </td></tr><tr><td>SPOOL TYPE</td><td colspan="2"></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10=10 SERIES 50=50 SERIES</td><td colspan="2"></td><td></td><td></td><td></td><td></td><td></td><td> NO CODE=WITHOUT THROTTLE INSERT B0.8=THROTTLE 0.8 MM B1.0=THROTTLE 1.0 MM B1.2=THROTTLE 1.2 MM </td></tr><tr><td colspan="9">NO CODE=SPRING RETURN WITHOUT DETENT F=DETENT WITHOUT SPRING RETURN</td></tr></table>				WMM	6							3=3-WAY 4=4-WAY								NO CODE=HANDLE ON SIDE OF PORT A L=HANDLE ON SIDE OF PORT B	6=6 SIZE								NO CODE=MINERAL SUBSTANCE HYDRAULIC OIL V=PHOSPHATE EATER HYDRAULIC OIL	SPOOL TYPE									10=10 SERIES 50=50 SERIES								NO CODE=WITHOUT THROTTLE INSERT B0.8=THROTTLE 0.8 MM B1.0=THROTTLE 1.0 MM B1.2=THROTTLE 1.2 MM	NO CODE=SPRING RETURN WITHOUT DETENT F=DETENT WITHOUT SPRING RETURN								
	WMM	6																																																						
3=3-WAY 4=4-WAY								NO CODE=HANDLE ON SIDE OF PORT A L=HANDLE ON SIDE OF PORT B																																																
6=6 SIZE								NO CODE=MINERAL SUBSTANCE HYDRAULIC OIL V=PHOSPHATE EATER HYDRAULIC OIL																																																
SPOOL TYPE																																																								
10=10 SERIES 50=50 SERIES								NO CODE=WITHOUT THROTTLE INSERT B0.8=THROTTLE 0.8 MM B1.0=THROTTLE 1.0 MM B1.2=THROTTLE 1.2 MM																																																
NO CODE=SPRING RETURN WITHOUT DETENT F=DETENT WITHOUT SPRING RETURN																																																								