



ORBITAL HYDRAULIC MOTOR

MODEL BM4U



WWW.OLEODINAMICAMOZIONI.IT

BM4U INTRODUCTION

THIS SERIES OF MOTOR, WITH ITS SHELL MADE OF DUCTILE CAST IRON OF ADEQUATE INTENSITY, CAN BE APPLIED TO SITUATIONS WITH LESS LOAD AND INTERVAL OPERATION, WIDELY TO AGRICULTURE, FORESTRY, PLASTICS, MACHINE TOOLS AND MINI MACHINES, SUCH AS THE MOLD HEIGHT ADJUSTMENT OF THE INJECTION MOLDING MACHINE, THE CLEANER, THE SAWMILL THE WORKTABLE ETC.




BM4U TECHNICAL DATA

TYPE		BM4U-160	BM4U-200	BM4U-250	BM4U-315	BM4U-400	BM4U-500
DISPLACEMENT (CM ³ /R)		158.8	200.8	252.2	317.5	401.6	535.3
MAX.PRESSURE.DROP (MPA)	CONT.	20	20	20	20	18	16
	INT.	24	24	24	24	21	18
	PEAK.	28	28	28	28	24	21
MAX.TORQUE (N·M)	CONT.	450	561	710	902	1008	1121
	INT.	559	714	883	1143	1255	1377
	PEAK.	663	818	1021	1322	1431	1598
MAX.CONT.SPEED (R/MIN)		625	495	395	310	245	185
MAX.FLOW (CONT.) (L/MIN)		100	100	100	100	100	100
MAX.OUTPUT.POWER (CONT.) (kW)		20.1	25.2	25.2	25.2	22	21
WEIGHT (KG)		20.3	20.8	21.4	22.4	23	24

SHAFT VERSION

P33:Ø40 CYLINDRICAL SHAFT,
PARALLEL KEY 12X8X70

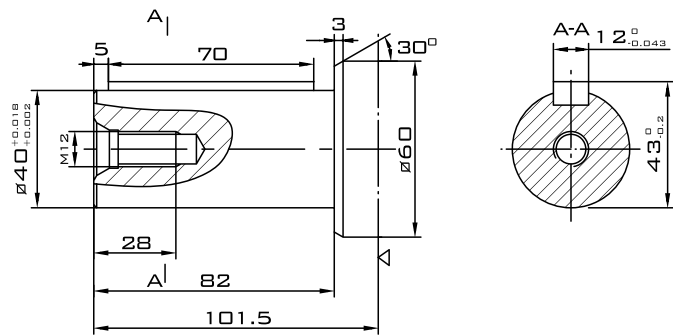

◁:MOTOR MOUNTING SURFACE

ORDER CODE

BM4U-									
SERIES	BM4U					ROTATION DIRECTION		OMIT = STANDART L = OPPOSITE	
DISPLACEMENT	160 200 250 315 400 500					SPECIAL FEATURES		OMIT = STANDART T7 = WITH DUSTPROOF RING	
OUTPUT						CODE PORTS		PORTS(A,B)(DEEP) DRAIN PORT T(DEEP)	
P33 =	Ø40 CYLINDRICAL					Y =		G3/4(15) G1/4(12)	
						FLANGE		4 - Ø14 OVAL FLANGE PILOT Ø125	
						A =			