

ROTATOR FHR 6FD2

STATIC
LOAD

60 kN

DYNAMIC
LOAD

30 kN

TORQUE
at 25MPa

1850 Nm

OILFLOW

25 l/min

WEIGHT

47 kg



OPPOSITE HOSE
CONNECTION



DOUBLE
BEARING



FORGED
STEEL

Grapple open
G1/2"
Max 250 bar

Grapple close
G1/2" Max 300 bar

Rotator designed
for intensive
professional use
and extended
long lifetime

Grapple open
G1/2"

Rotator frame L80 ø35


Rotate left/right
G1/2" Max 250 bar

Rotator with
two bearings
to withstand
compression and
stretching forces

Grapple close
G1/2"

Optional open/close channels

Robust and shock resistant
steel flange for fitting
the grapple in standard
pattern with 6xM16 bolts

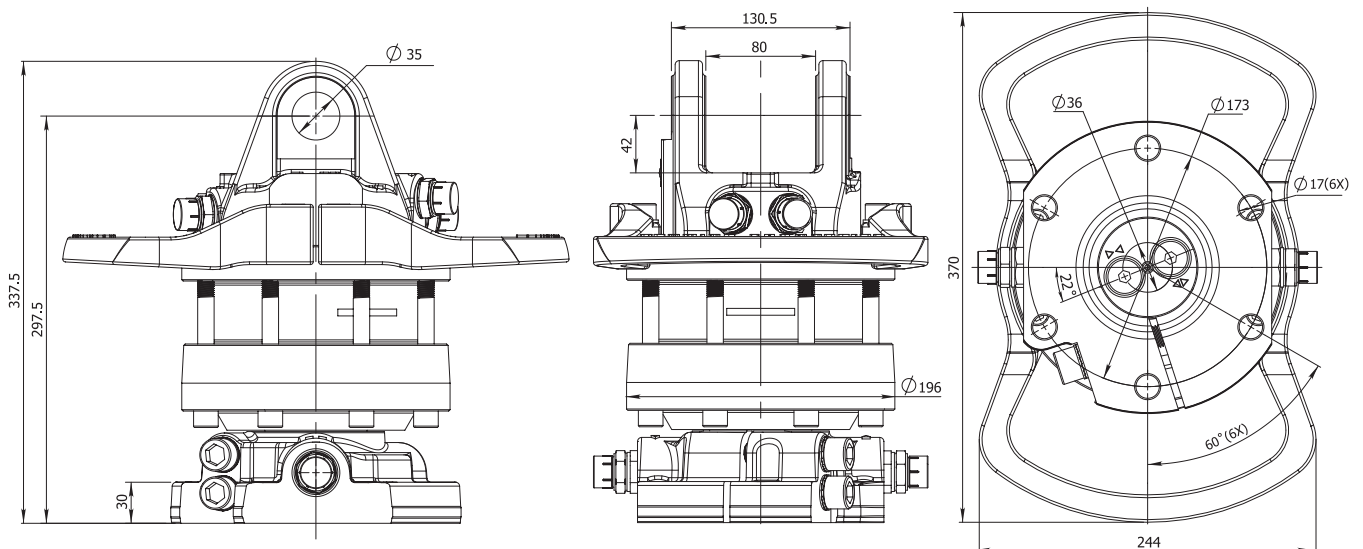

FORESTRY



AGRICULTURE



CONSTRUCTION



GENERAL CARGO



RECYCLING



FORMIKO
HYDRAULICS

formiko.lv

43