


Z2FS10 SERIES MODULAR THROTTLE/CHECK VALVES ARE USED TO RESTRICT FLOW IN ONE DIRECTION WHILE ALLOWING FREE-FLOW IN THE OPPOSITE DIRECTION AS CHECK VALVES.


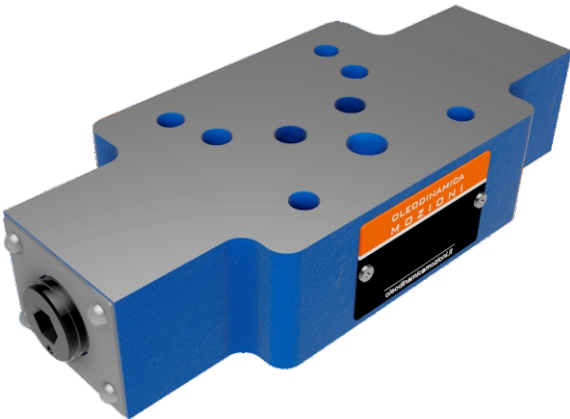


TECHNICAL DATA



SIZE	10
OPERATING PRESSURE (MPa)	31.5
MAX. FLOW RATE (L/MIN)	160
FLUID TEMPERATURE (°C)	-30 – 80
WEIGHT (KG)	2.2
VALVE BODY (MATERIAL)	CASTING PHOSPHATING SURFACE

SCHEMES

1 =COMPONENT SIDE, 2=PLATE SIDE

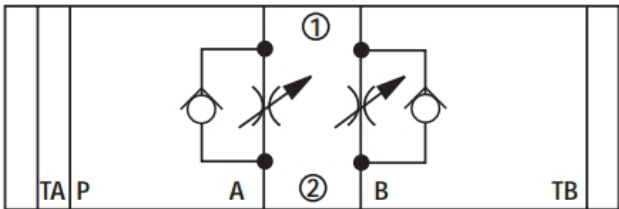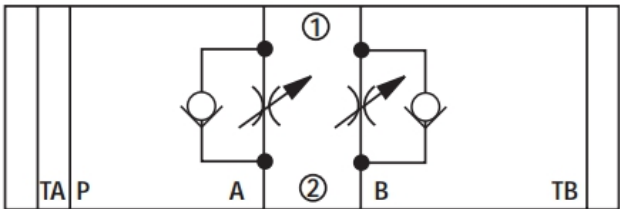

CHARACTERISTIC CURVES

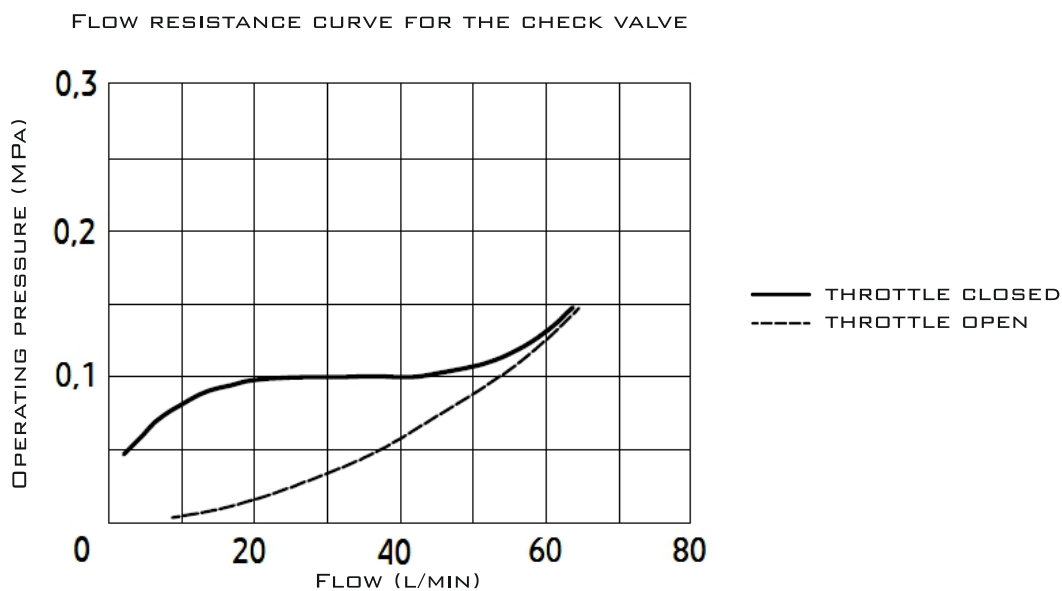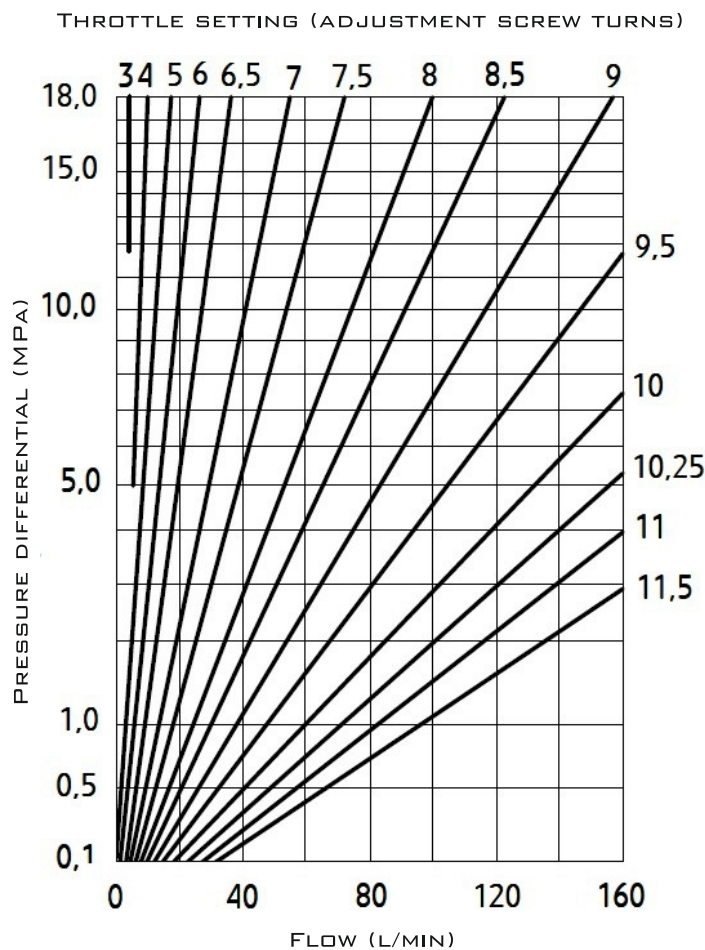




VALVOLE DI FLUSSO

Z2FS10

MODULAR THROTTLE/CHECK VALVES

SUBPLATE INSTALLATION DIMENSIONS

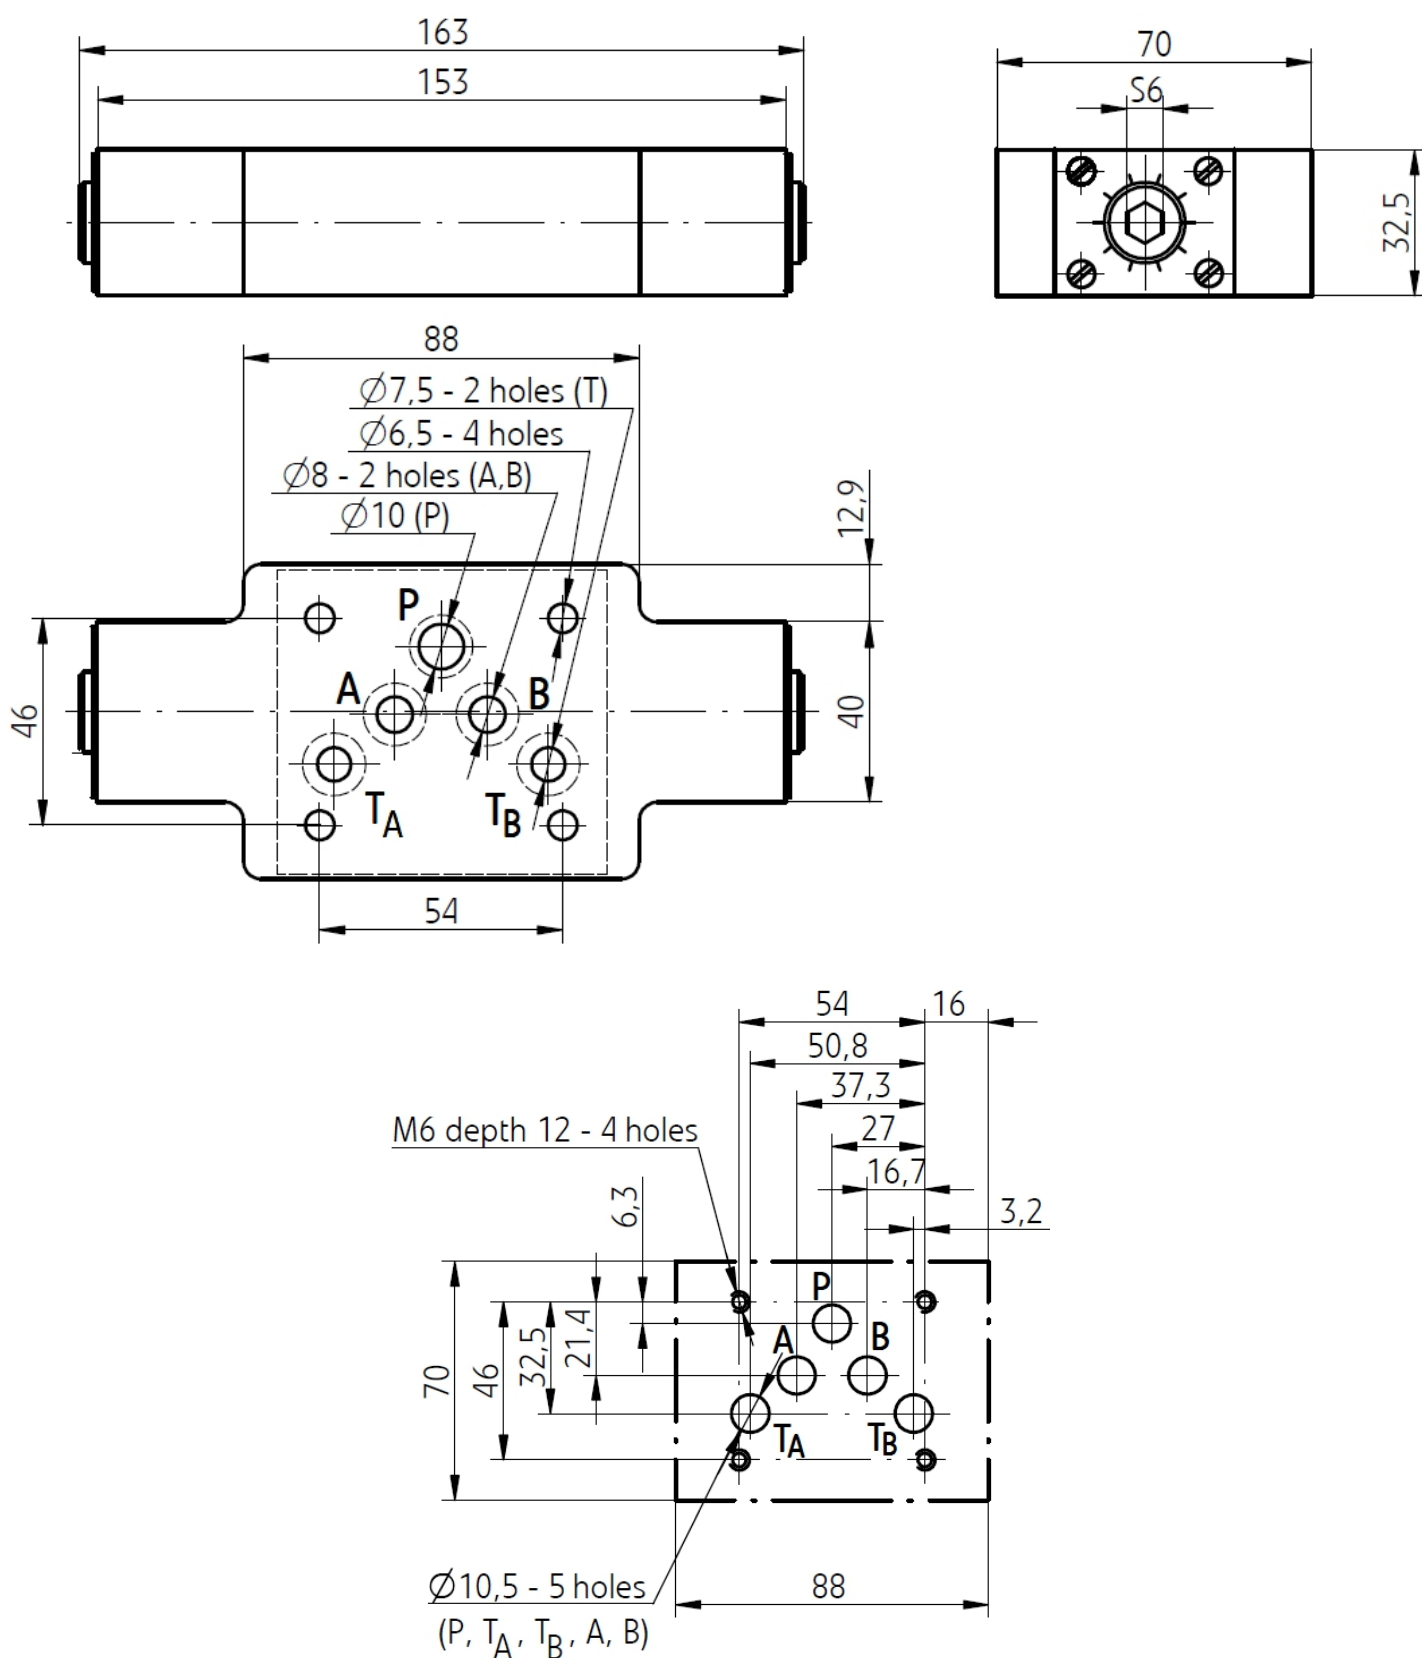

Z2FS10		VALVOLE DI FLUSSO							
MODULAR THROTTLE/CHECK VALVES									
ORDER CODE									
<table><tr><td>Z2FS</td><td>10</td><td></td><td></td><td></td><td></td></tr></table>		Z2FS	10						
Z2FS	10								
10=10 SIZE									
NO CODE=PORT A, B WITH THROTTLE A=PORT A WITH THROTTLE B=PORT B WITH THROTTLE		ADDITIONAL REMARKS							
2X=20-29 SERIES 3X=30-39 SERIES		NO CODE=NBR SEALS V=FKM SEALS							