

LiFePO4 Battery

POW-100AH-25.6V

POWMr

Perfect Upgrade Replacement:

The ideal upgrade replacement for lead-acid battery packs with high energy density.

A-Grade Cells:

Safe and efficient.

Long Cycle Life:

0.2C discharge, at 25°C and 80% DOD, cycle life exceeds 6000 cycles.

High Capacity and Endurance:

Supports up to 2560W continuous load power, capable of powering multiple loads simultaneously.

Comprehensive Protection:

Built-in safe, reliable, and highly compatible BMS, ensuring energy storage safety.

More Energy Storage:

Store more energy within the same volume.

Efficient Charging:

Maximum charging current of 100A, achieving full charge in as little as 1 hour.

Flexible Configuration:

Configurable up to 2 in series and 2 in parallel, achieving a total capacity of up to 200Ah, a total voltage of up to 51.2V, and a total energy of up to 10.24kWh.



Overvoltage



Undervoltage



Overcurrent



Short Circuit



Overtemperature

Product Overview

The POW lithium battery series delivers exceptional performance, capacity, and reliability. Utilizing the latest high-power battery technology, the POW lithium batteries are designed for applications in environmentally sensitive areas that require enhanced commercial cycle life capabilities. These batteries are widely used across industrial, residential, commercial, and private sectors, meeting a diverse range of needs. With a maintenance-free structure and advanced design features, the POW lithium series is the ideal choice for various markets, including solar and renewable energy storage, electric vehicles, golf carts, industrial equipment, floor machines, forklifts, aerial work platforms, and robotics; marine, RV, and idle-free solutions; mobile and medical equipment; as well as telecommunications, broadband, and cable TV UPS systems. The POW lithium battery series, with its superior technology and reliability, ensures optimal performance in all applications.

BATTERY SPECIFICATION

Battery Type-Chemistry	LiFePO4
Nominal Voltage	25.6V
Nominal Capacity	100Ah
Energy Density	2560Wh
Dimensions (LxWxH)	485x170x240mm
Weight	≤21kg
Terminal Type	M8
Terminal Torque	8.5Nm
Case Material	ABS
BMS Built-in	Yes
Internal Resistance	<20 mΩ
AH Efficiency-round trip	>99.5%
Self-Discharging Per Month	<3%
Max in Parallel	2
Max in Series	2
Charging Voltage Range	21.6V~29.2V
Recommend Charge Voltage	29.2V±0.2V
Max Charge Voltage	29.2V±0.2V
Max Continuous Current	100A
Recommend Discharge Voltage	22.4V±0.2V
Max Discharge Voltage	20V±0.2V
Max Continuous Discharge Current	100A
Cycle Life (0.2C, 25°C@80% DOD)	6000 Cycle
Discharge Temperature	-20~60°C
Charge Temperature	0~45°C
Storage Temperature	-10~30°C

BMS CHARACTERISTICS

Primary Charging Protection	Current: 110A	Delay Time: 1000ms
Second Charging Protection	Current: 180A	Delay Time: 500ms
Primary Discharging Protection	Current: 110A	Delay Time: 5s±3s
Second Discharging Protection	Current: 180A	Delay Time: 3s±2s
Over Charge Voltage Protection (cell)	Voltage: 3.75V	Delay Time: 500ms
Over Discharge Voltage Protection (cell)	Voltage: 2.2V	Delay Time: 500ms
Temperature Protection	PCB Temperature	≥95°C
	Recover Temperature	≤85°C

Constant Current Discharge Data (Amperes@25°C) (Cut off voltage 20V)


Discharging Time	1h	2h	3h	4h	5h	10h	20h
Discharging Current	100A	50A	33.3A	25A	20A	10A	5A

Constant Current Discharge Data (Watts@25°C) (Cut off voltage 20V)


Discharging Time	1h	2h	3h	4h	5h	10h	20h
Discharging Power	2560W	1280W	853W	640W	512W	256W	128W

PERFORMANCE CURVE


Discharge characteristics (25°C)

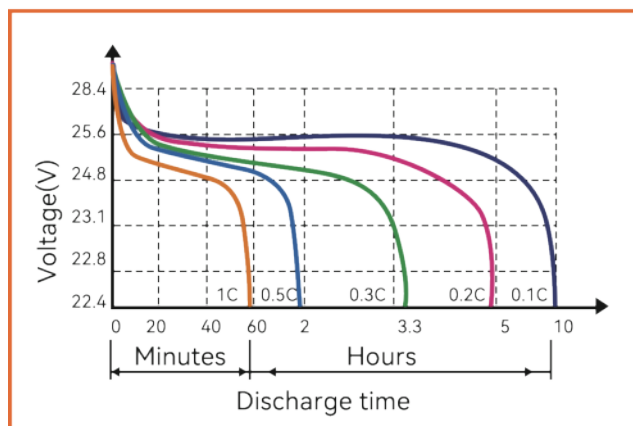


Different Temperature Discharge Curve (0.5C)

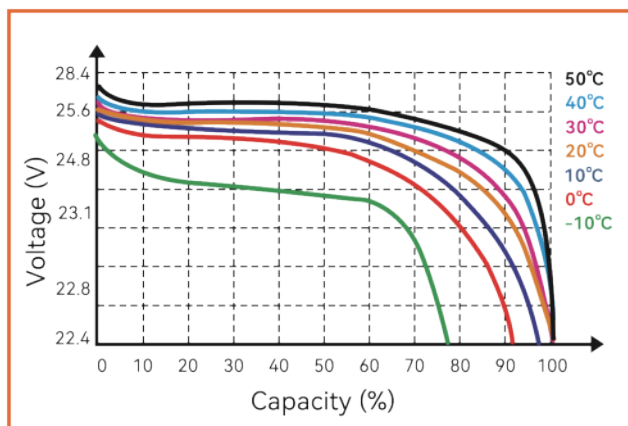

Different DOD Discharge cycle life Curve 0.2C 25°C

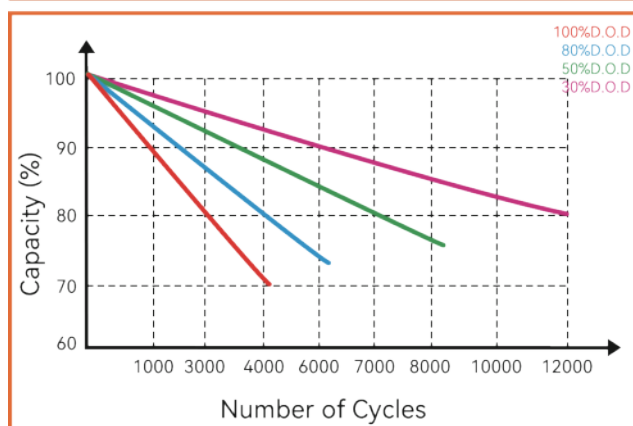

State of Charge Curve (0.5C, 25°C)

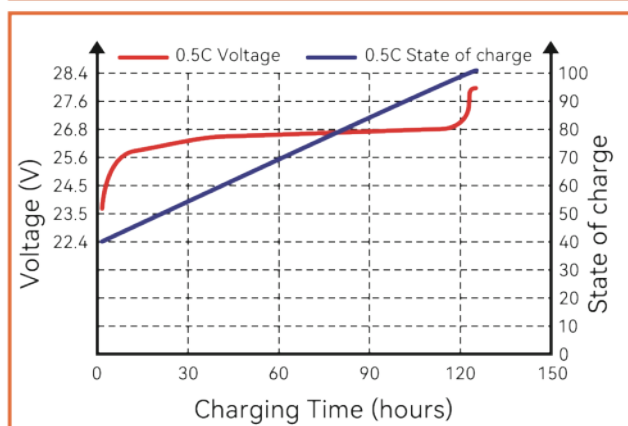

Dimension



Precautions

Note 1: Please always refer to the latest version of the technical manual published on our website to ensure safe and efficient operation.

Note 2: For parallel connections, fully discharge the batteries before connecting them in parallel, and then recharge them. For series connections, ensure the remaining capacity of each battery is the same.

Note 3: Parallel connections are intended only to extend backup time, not to increase output power.

Note 4: The company assumes no responsibility for any accidents caused by not following this user manual.

POWMR

SHENZHEN HEHEJIN INDUSTRIAL CO.,LTD

www.powmr.com

Tel/Fax +86 755-28219903

E-mail: support@powmr.com

Add:Henggang Street, longgang District, ShenZhen,Guangdong, China