



ITEM	PART NUMBER
A	320-10160
B	14963285
C	14947663
D	580-10245
E	14963570

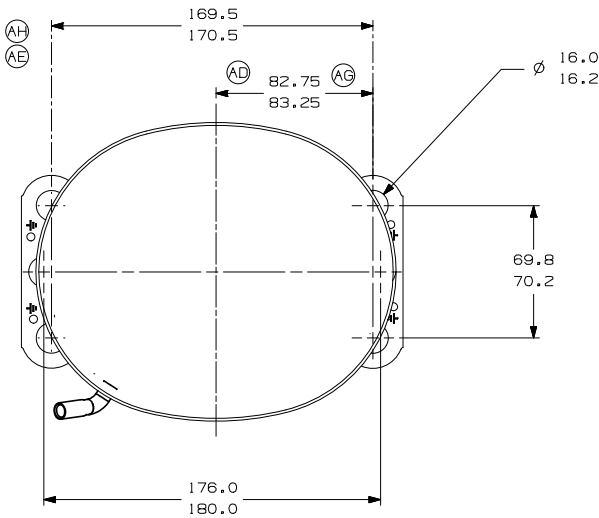



- AUXILIARY VIEW -
FASTENING DIMENSIONS

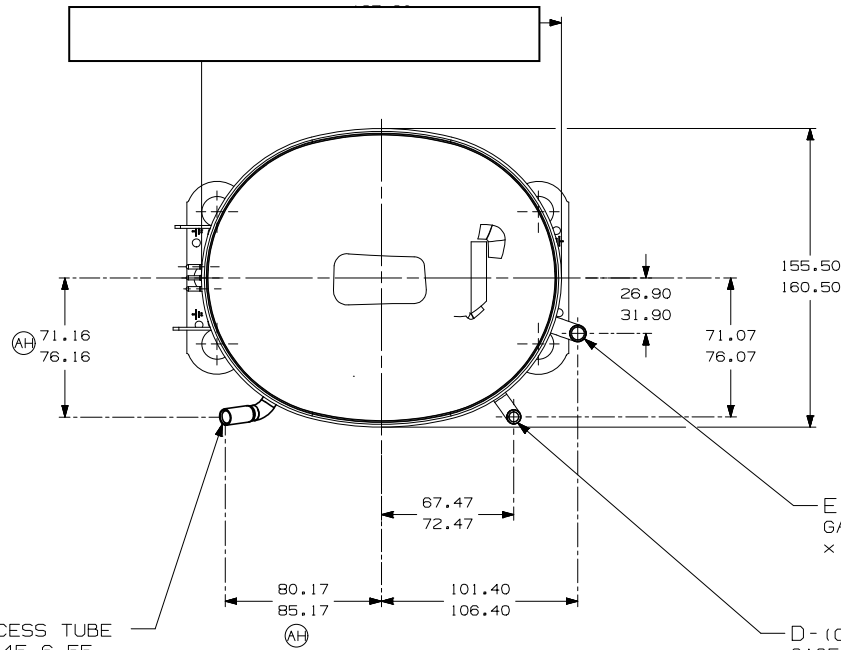

C - (COPPER) PROCESS TUBE
GAGE I.D. TO 6.45-6.55
× 15.00-17.00 DEEP.

E - (COPPER) SUCTION TUBE
GAGE I.D. TO 6.45-6.55
× 15.00-17.00 DEEP.

D - (COPPER) DISCHARGE TUBE
GAGE I.D. TO 4.92-5.02
× 15.00-17.00 DEEP.

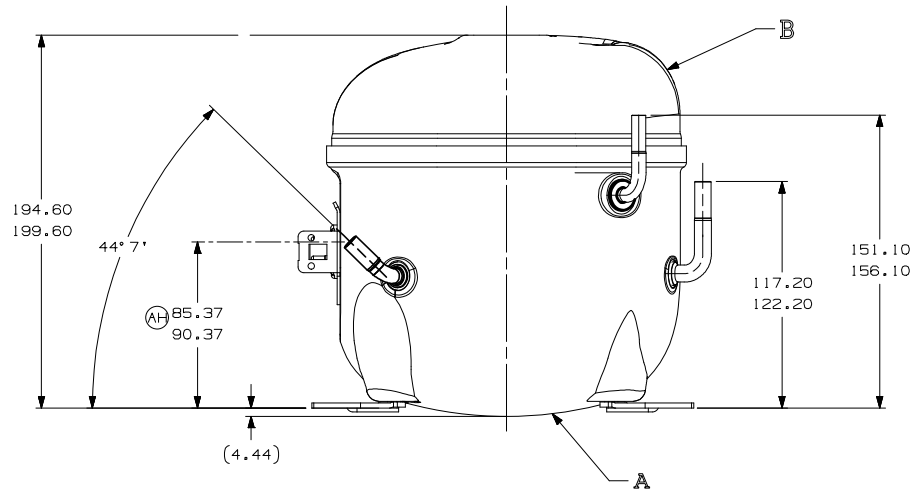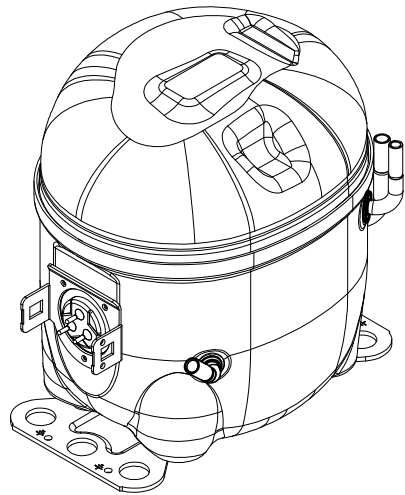

- NOTES:
- 1- IF SPECIFIED IN BM. ASSEMBLE PARTS AS SHOWN.
 - 2- SEE SPEC. "A-B" & A-C FOR PROCESS.
 - 3- THERE CAN BE NO CREASES IN THE TUBES. (CREASES ARE SIGNS OR MARKS THAT ARE IN SOMETHING THAT BENDS)
 - 4- AFTER THE FOLDS IN THE TUBES, CANNOT BE ACCELERATED TO AREA EXCEEDING 30%.
 - 5- TUBES OF SUCTION, DISCHARGE AND PROCESS MUST BE FREE OF INK ON 15.8mm (5/8") FROM TOP OF THE TUBES AS SPEC. T.P.Co. A-B4.
 - 6- FOR SUPPLIER ENVIRONMENTAL REGULATORY REQUIREMENTS, SEE TECUMSEH GLOBAL SPEC. 08.

THIRD ANGLE PROJECTION

UNITS: mm

DRAWING SIZE: A2

PROC. A. SYMBOLS AS PROCEDURE 2-01.031 TECUMSEH OF BRAZIL

★ = CATEGORY I

▲ = CATEGORY II

■ = CATEGORY III

■ = CATEGORY IV



SALES COMPRESSOR			PART NO. DCAE126	
OWN. J. BARBANO	CK. A. MARTINEZ	APR. W. CORREA	SCALE 1:2	PAGE 1/1
DATE 25/10/11	REF.		FAMILY	AE2