



ISO 9001 CERTIFIED

DNH^{AS}

N-3770 Kragerø
NORWAY

Phone: (47) 35 98 56 00

Fax: (47) 35 98 56 10

E-mail: dnh@dnh.no

Web-site: www.dnh.no



B-640(T)

DNH WW Ltd. Phone: (44) 1908 275 000
England Fax: (44) 1908 275 100

E-mail: dnh@dnh.co.uk

DNH GmbH Phone: (49) 040 6569 30-0
Germany Fax: (49) 040 6569 30-30

E-mail: dnh@dnh.de

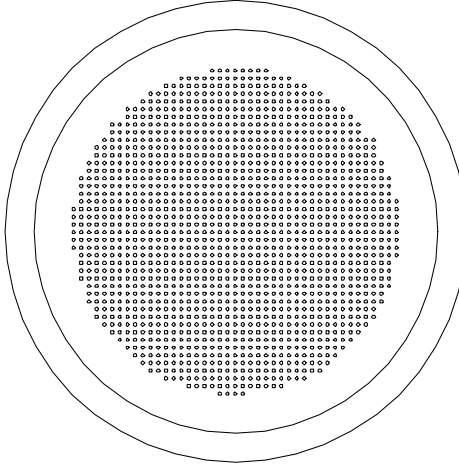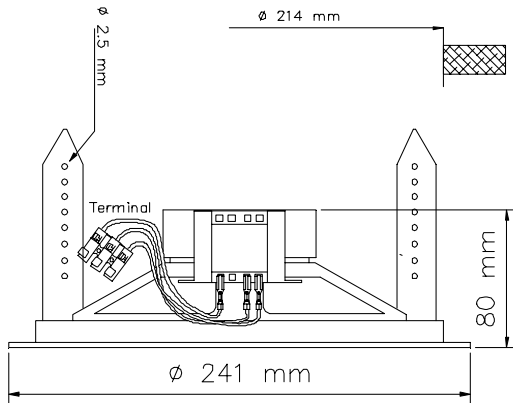

Transformer:

Combined

50 / 100 Volt line

5(White) : 6(Green) 50V

5(White) : 8(Red) 100V

Secondary nominal
tappings:

1 : 4 6,0W

1 : 3 3,0W

2 : 4 2,0W


1 : 2 1,5W

3 : 4 0,9 W

2 : 3 0,5 W

Rec. ceiling hole: $\varnothing$ 215 mm

1W/1m Pink Noise 1/3 octave bands

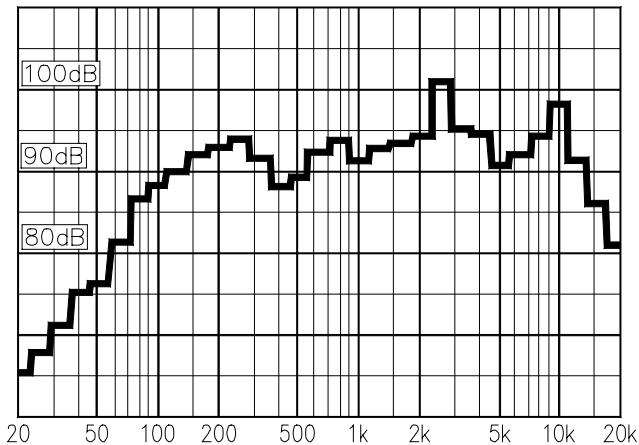

Material / Colour.....Aluminium / RAL9010

Mounting 4 metal strips

Termination Spring clamps

Weight 1,2 kg

IP-rating.....

Max. / min. amb. temp 90°C / -20°C

Standard version 50 / 100 V transformer

Rated / max. power 6 W / 20 W

SPL 1W/1m.....90 dB

SPL rated power97 dB

Effective freq. range 60 – 20000 Hz

Dispersion (-6dB) 1kHz / 4kHz 140° / 50°

Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- Install outer ring into the hole by bending down 4 metal strips. Use nail / screw to prevent the ring from turning. Connect cable to terminal. Screw the loudspeaker grill clockwise into fixed position.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Take care when loudspeaker is energized (100 V).
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.



DNH reserves the right to alter specifications without notice.

Rev. 26.01.2000