

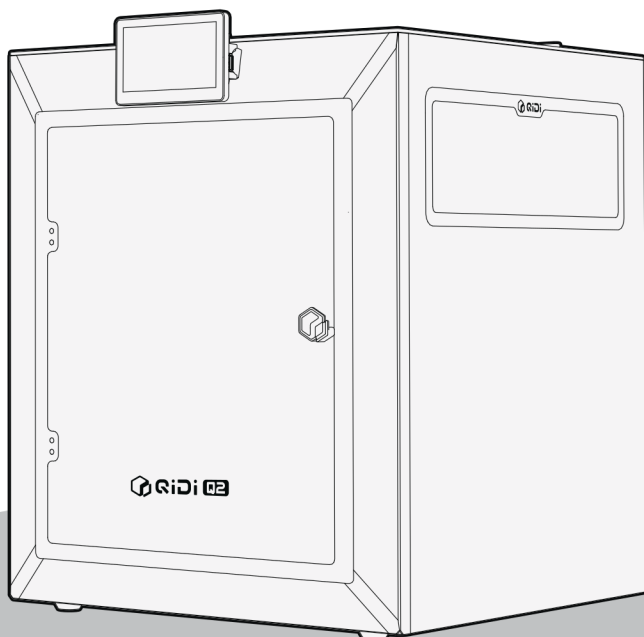



# Q2

## Quick Start Guide


**Please read this guide carefully  
before using this product**

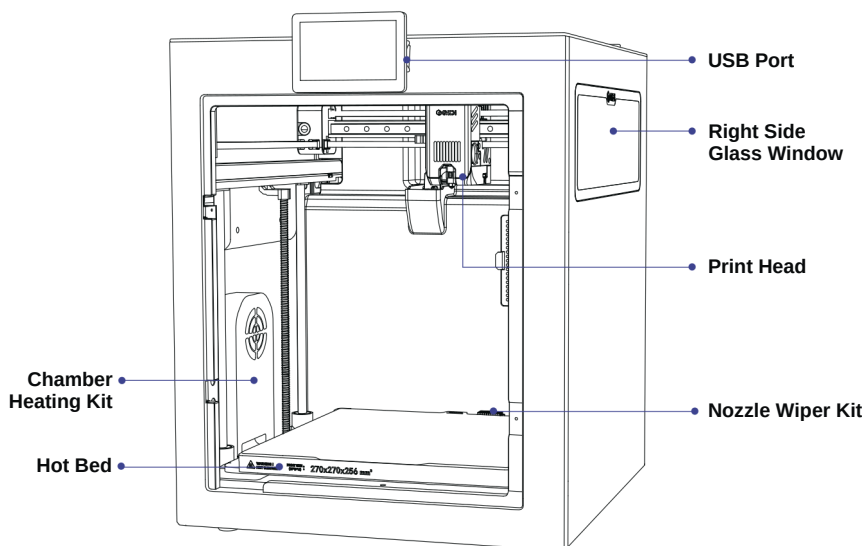

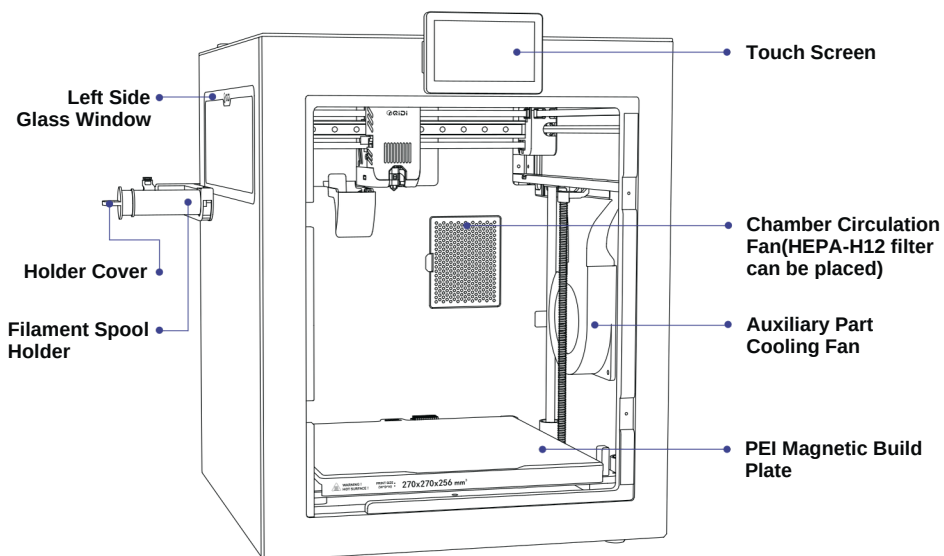


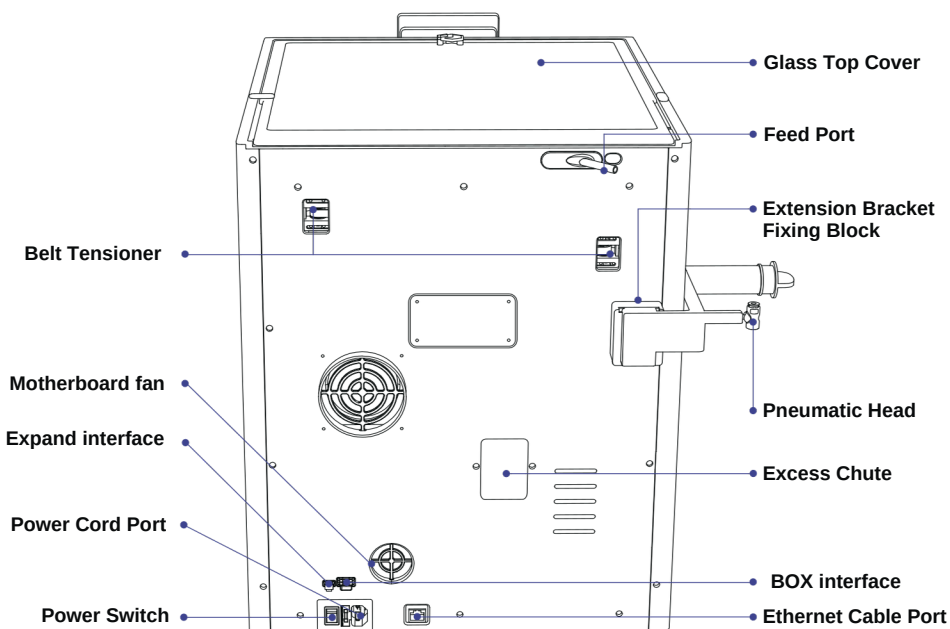


## Install Display Screen

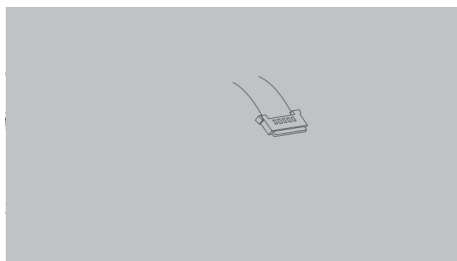

Pull the cable out approximately 50mm.

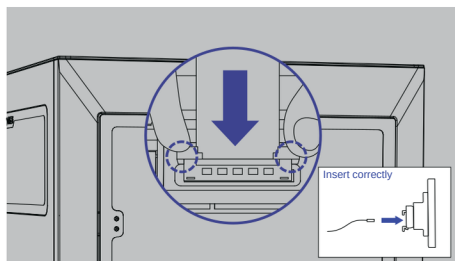


Press and hold the terminal, insert the ribbon cable into the screen connector.

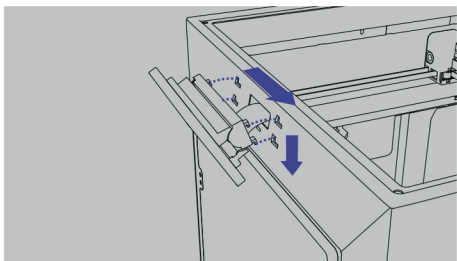


Insert the screen back into the slot of the printer, first press down and push the screen to the right to lock it.

**Attention:** When installing the screen, insert excess cables into the front cover of the machine.

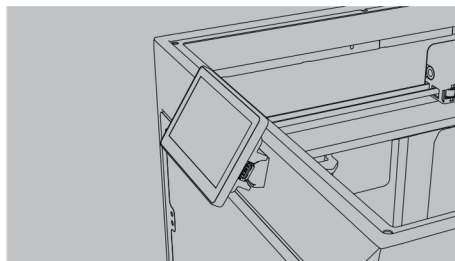


The monitor installation is complete.


## Unlock Platform

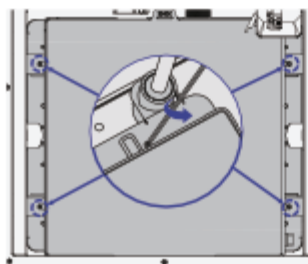

Unscrew the four screws that secure the hot bed.



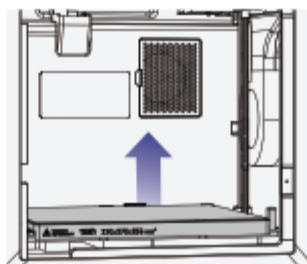


Waiting for the platform to rise.

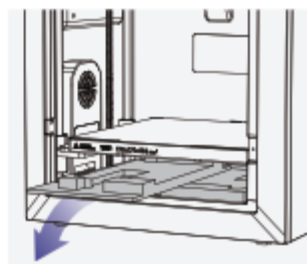



Take out the foam pad under the platform.

## How to Remove the Print Head Front Cover

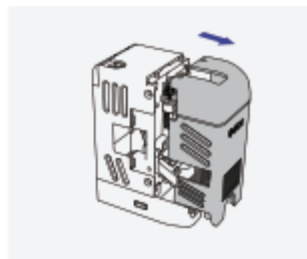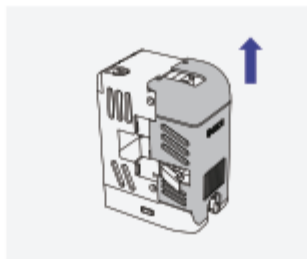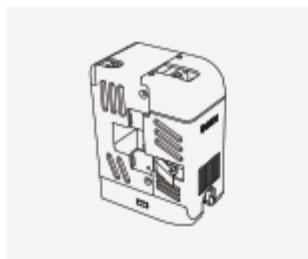

The print head front cover features a buckle structure on the top. Do not remove it directly. First, unlock it by lifting it upward, then remove the print head front cover outward and laterally.

## First Printing

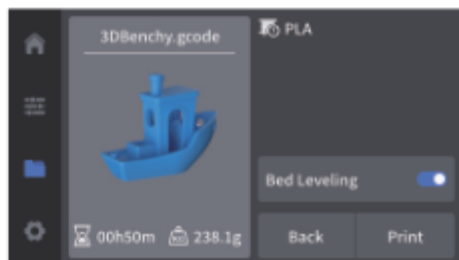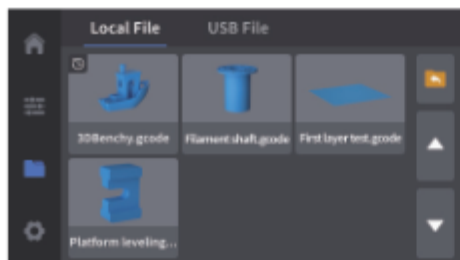

Click the button to start printing.

**Note:** Pre-saved models files use PLA Rapido filament by default.