

FLUSH DIAPHRAGM PRESSURE TRANSMITTER

BHT 26

"Flush Pressure Transmitter For Food Industry and Aseptic Applications "



- SS316L isolation diaphragm structure
- 26 mm diameter stainless steel housing
- Suitable for 1,5" tri-clamp (DN40) connection
- Different options from 0...100 mBar to 0...100 Bar (Exp: 0...100mbar / 0...200mbar / 0...1bar / 0...16bar / 0...100bar etc.)
- 4...20mA / 0...10VDC etc. Different analog output options
- Suitable for process temperature up to 120°C
- EMC and reverse polarity protection
- High accuracy and stability
- IP65 protection class

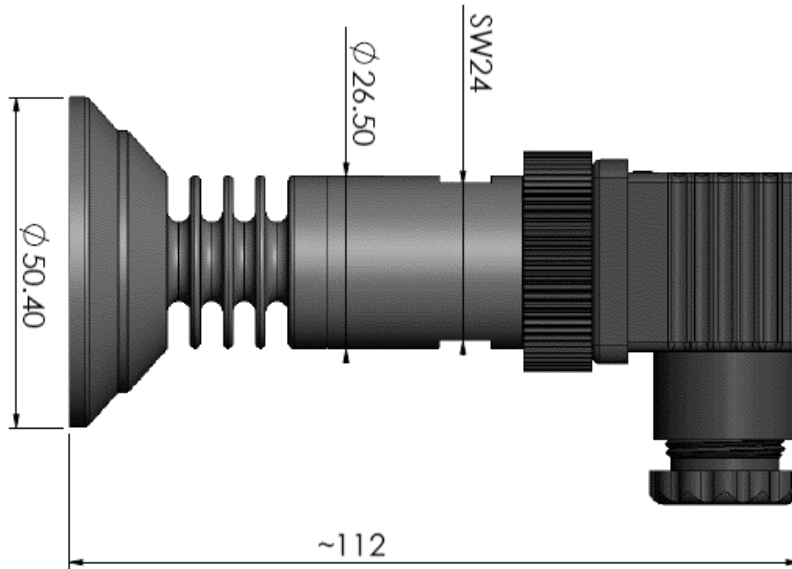
BHT 26 flush pressure transmitter is applicable to food, beverage, pharmaceutical and biological engineering. Full metal flush-mounting isolation diaphragm is directly welded with process connection to ensure the precision connection between process connection and measuring diaphragm. Therefore, no additional sealing gaskets are required, and it ensures there are no measurement dead zones.

The stainless steel 316L diaphragm separates the measuring medium from the pressure sensor, and the process pressure from the diaphragm to the piezoresistive sensor is transferred statically through the filling fluid which has the hygienic license.

APPLICATIONS

- | | |
|--|---|
| <ul style="list-style-type: none">• Oil and Gas Systems• Compressed Air Systems• Steam Systems | <ul style="list-style-type: none">• Liquid Processes• Paste and Viscous Fluids• Vacuum Pressure Sensing |
|--|---|




MECHANICAL DIMENSIONS (mm)



TECHNICAL SPECIFICATIONS

Pressure range	Different options from 0...100 mBar to 0...100 Bar (See page3 "pressure range selection") Exp: 0...100mbar / 0...200mbar / 0...1bar / 0...16bar / 0...100bar etc.					
Diaphragm	316L stainless steel					
Output Signal	4...20mA (2 Wire)	0...20mA (3 Wire)	0...10VDC	1...6VDC	0...5VDC	Ratiometric
Supply Voltage	8 ... 32 VDC	12...30 VDC	12...30 VDC	12...30 VDC	12...30 VDC	5 VDC
Accuracy	%0.5FS					
Hysteresis and repeatability	%0.1FS					
Temperature drift	0.1bar: ±%3FS (0°C~60°C) Other ranges: ±%1.5FS (-10°C~70°C)					
Response time	≤1ms (up to 90%FS)					
Overpressure	See. Pressure range selection table (page3)					
Service life	1×10 ⁶ pressure cycles					
Operating temperature	-40°C ... +120°C					
Storage temperature	-40°C ... +120°C					
EMC	Immunity: IEC 61000-6-2, Radiation: IEC 61000-6-3					
Insulation resistance	≥200MΩ/250VDC					
Surge	IEC 61000-4-5 3 level					
Static	IEC 61000-4-2 4 level					
Electrical connection	DIN43650-A, M12 connector or 3 x 0.14mm ² PVC cable					
Mechanical Connection	1,5" tri-clamp (DN40)					
Housing material	316L stainless steel					
Medium compatibility	All kinds of media compatible with SS316L					
Protection	IP65					

ELECTRICAL CONNECTIONS

				
		DIN D43650-A	M12 / 4 PIN	
		S30	S12	S15
		PIN NO	PIN NO	
CURRENT OUTPUT	+Vcc	2	2	1
	Analog Output	1	1	3
VOLTAGE UTPUT	+Vcc	2	2	1
	GND	1	1	3
	Analog Output	3	3	2
				COLOR
				RED
				BLACK
				RED
				BLACK
				YELLOW

Code	Pressure Range	Overpressure	Burst Pressure
100mBar	0~0,1 Bar	%300FS	%600FS
200mBar	0~0,2 Bar	%300FS	%600FS
350mBar	0~0,35 Bar	%300FS	%600FS
700mbar	0~0,7 Bar	%300FS	%600FS
1Bar	0~1 Bar	%200FS	%500FS
1,6Bar	0~1,6 Bar	%200FS	%500FS
2,5Bar	0~2,5 Bar	%200FS	%500FS
4Bar	0~4 Bar	%200FS	%500FS
6Bar	0~6 Bar	%200FS	%500FS
10Bar	0~10 Bar	%200FS	%500FS
16Bar	0~16Bar	%200FS	%500FS
25Bar	0~25 Bar	%200FS	%500FS
40Bar	0~40 Bar	%200FS	%400FS
60Bar	0~60 Bar	%200FS	%400FS
100Bar	0~100 Bar	%200FS	%400FS

ORDER CODE

Model BHT 26		Output Signal Voltage Output Products V : 0-10VDC (standard) V1 : 0-5VDC V2 : 1-6VDC V3 : 0,5-4,5VDC V4 : 0,5-5,5VDC V5 : 1-5VDC V6 : 1-10VDC Ratiometric Products V8 : Ratiometric 0.5-4.5VDC V9 : Ratiometric 0-5VDC Current Output Products A : 4-20mA (2-wire) (standard) A0 : 0-20mA (3-wire) *Ask for others	
		XXbar Pressure Range Different models from 100 mbar to 100 bar *See page3 "pressure range selection"	
		XX	XXX Electrical Connection S30 : DIN43650-A type connector S12 : M12x1 4 pin S15 : M12x1 4 pin (1 supply, 3 output) 2M : 2 meters cable *Ask for others
Sample Order Code: BHT 26 10bar A S30			