




NXM-250S/4300A



NXMS-250H/3300

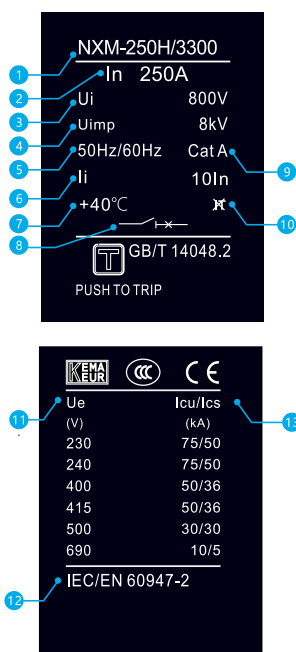

NXM Nameplate of thermomagnetic stationary molded case circuit breaker

NXM series moulded case circuit breaker

Breaker

The moulded case circuit breaker will provide protection for the circuit and equipment in case of overload, short circuit and under voltage condition occurred in the power distribution circuit. Besides, it can also provide protection of overload, short circuit and under voltage for the non-frequent start of motor

▪ Frame size:

NXM series moulded case circuit breaker: 63A, 125A, 160A(W125), 250A, 400A, 630A, 800A(W630), 1000A(W800), 1250A, 1600A

NXM series moulded case circuit breaker

▪ Rated operational voltage: U_e : 220V/230V/240V, 380V/400V/415V, 500V, 690V

▪ Breaking capacity code: E, S, F, H

▪ Number of poles: 2P, 3P, 4P

▪ Release type: thermal magnetic fixed type; magnetic fixed type; electronic type.

▪ Installation method: Fixed type; plug-in type

Nameplate interpretation

- 1 Product type: Frame size; breaking capacity; poles number
- 2 In: Rated operational current
- 3 Ui: Rated insulation voltage
- 4 Uimp: Rated impulsive withstand voltage
- 5 Frequency of A.C.
- 6 li: 10In Multiple of current of transient behavior
- 7 +40°C : Ambient temperature
- 8 Electrical symbol for circuit breaker with isolating function
- 9 Cat A: Utilization category of breaker
- 10 Not for IT systems
- 11 Ue: Rated operational voltage
- 12 The product is in conformity with standard IEC/EN 60947-2
- 13 Icu/Ics: Ultimate short circuit breaking capacity/Service short circuit breaking capacity

NXM series moulded case circuit breaker

Model definition and description

NXM	160	S	P	4	300
Product code	Frame size code	Breaking capacity code ²⁾	Operation way code	Number of poles code	Code of release type and inner accessories ³⁾
NXM: moulded case circuit breaker	63A 125A 160A(W125A) 250A 400A 630A 800A(W630A) 1000A(W800A) 1250A 1600A	E: 15kA S: 25kA F: 36kA H: 50kA E: 20kA S: 36kA F: 36kA H: 50kA E: 36kA S: 50kA F: 50kA H: 70kA S: 50kA F: 50kA H: 70kA S: 50kA H: 70kA	No code: direct handle operation P: motor operation Z: rotary handle operation	2: 2 poles 3: 3 poles 4: 4 poles	First number represents the release type 2: only magnetic type 3: thermal magnetic type The second number and the third number are codes of inner accessories

Model selection examples:

NXM-160SP/4300 2 A 100 R: To order one moulded case circuit breaker with 160A frame size, 35kA breaking capacity, thermal adjustable and magnetic fixed release, with motor-driven mechanism, 4 poles, with no inner accessories, motor protection, the category of four poles is A. The rated current is 100A and rear connection.

Note: ¹⁾ The rated current of each frame can be seen in table 1.

²⁾ The corresponding poles number and breaking capacity related to frame size can be seen in table 2.

³⁾ For tripping method and inner accessories, see page 17-20.

Comparison table of frame sizes and rated current

Rated current (A)	10	16	20	25	32	40	50	63	80	100	125	140	150	160	180	200
63	■	■	■	■	■	■	■	■								
125	■	■	■	■	■	■	■	■	■	■	■					
W125				■	■	■	■	■	■	■	■					
160				■	■	■	■	■	■	■	■	■	■	■		
250											■	■	■	■	■	■
400																
630																
W630																
800																
W800																
1000																
1250																
1600																

Comparison table of frame sizes, number of poles and breaking capacity

Frame size (A)		63			125			160(W125)			250		
Number of poles		2P	3P	4P	2P	3P	4P	2P	3P	4P	2P	3P	4P
Frame size (A)	E	■	■	■	■	■	■	■	■	■	■	■	■
	S	■	■	■	■	■	■	■	■	■	■	■	■
	F	-	■	■	-	■	■	-	■	■	-	■	■
	H	-	■	■	-	■	■	-	■	■	-	■	■

Technical Parameters

NXM series moulded case circuit breaker

Frame Size, rated current Inm (A)			63				125				160 (W125)					250			
Rated current In (A), 40°C , 55°C			10,16,20,25,30,32,40,50,60,63				10,16,20,25,30,32,40,50,60,63,70,75,80,100,125				32,40,50,60,63,70,75,80,100,125,140,150,160					160,170,180,200,225,250			
Rated insulation voltage Ui(V)			800				800				800					800			
Rated impulse withstand voltage Uimp(kV)			8				8				8					8			
Rated operational voltage Ue(V), AC50/60Hz			220/230/240, 380/400/415/500				220/230/240, 380/400/415/500				220/230/240, 380/400/415, 500/690					220/230/240, 380/400/415, 500/690			
Breaking capacity code			E	S	F	H	E	S	F	H	E	S	F	H	R	E	S	F	H
Number of poles	2P			-	-			-	-			-	-	-			-	-	
	3P													-					
	4P													-					
Rated ultimate short circuit breaking capacity Icu (kA)	AC220/230/240V	18	36	50	75	18	36	50	75	40	50	50	75	-	40	50	50	75	
	AC380/400/415V	15	25	36	50	15	25	36	50	20	36	36	50	40	20	36	36	50	
	AC500V	-	-	15	25	-	-	15	25	-	-	30	30	40	-	-	-	-	
	AC660/690V	4	5	5	6	4	5	5	6	8	8	10	10	10	-	8	-	-	
Rated service short circuit breaking capacity Ics (kA)	AC220/230/240V	18	18	50	50	18	18	50	50	30	30	50	50	-	30	30	50	50	
	AC380/400/415V	15	15	36	36	15	15	36	36	20	20	36	36	-	20	20	36	36	
	AC500V	-	-	15	15	-	-	15	15	-	-	30	30	40	-	-	-	-	
	AC660/690V	4	4	5	5	4	4	5	5	4	4	5	5	5	-	5	-	-	
In conformity with standards			IEC/EN 60947-2																
Utilization category			A				A				A					A			
Isolation function																			
Ambient temperature			-35°C ~+70°C																
Arcing distance			≤50				≤50				≤50					≤50			
Mechanical life (times)	Without maintenance		20000				20000				20000					20000			
	With maintenance		40000				40000				40000					40000			
Electrical life (times)		AC415V, In	10000				10000				10000					10000			
Release type and protection type	Magnetic release	Distribution protection																	
		Motor protection																	
	Thermal magnetic release	Distribution protection																	
		Motor protection																	
Accessories	Auxiliary contact																		
	Alarm contact																		
	Auxiliary contact, alarm contact																		
	Shunt release																		
	Under voltage release																		
	Manual operational mechanism																		
	Motor-driven mechanism																		
	Rear connection																		
	Plug-in type																		
	Extending terminal bonding bar																		
Derivative product	For special use of prepaid ammeter			-				-				-				-			
	Overload alarm non-trip		-	-			-	-											
Dimension and size(mm) Width (w) X height (H)X depth(D)		Width (2P/3P/4P)	56/78/103				56/78/103				63/90/120					78/105/140			
		Height	135				135				155					165			
		Depth (E/S/F/H type)	71/71/81/81				71/71/81/81				75.5/75.5/91/91					77/77/102/102			

Power loss table

Product model	Making current(A)	Single pole resistance (mΩ)	3/4pole total power loss		
			Front connection	Rear connection	Plug-in rear connection
NXM-63	63	1.8	21	25	28
NXM-125	125	0.6	36	44	51
NXM-W125	125	0.42	23	30	48
NXM-160	160	0.42	38	45	53
NXM-250	250	0.35	47	55	65
NXM-400	400	0.13	88	95	145
NXM-630	630	0.09	180	190	200
NXM-W630	630	0.07	178	140(520A)	152(520A)
NXM-800	800	0.07	200	230	290
NXM-W800	800	0.058	160	212	234
NXM-1000	1000	0.058	250	280	300
NXM-1250	1250	0.042	265	-	-
NXM-1600	1600	0.027	280	-	-
NXMS-160	160	0.38	35	42	50
NXMS-250	250	0.3	44	52	62
NXMS-400	400	0.13	82	90	140
NXMS-630	630	0.07	140	130(520A)	150(520A)
NXMS-1000	1000	0.05	230	250(920A)	270(920A)
NXMS-1250	1250	0.04	265	-	-
NXMS-1600	1600	0.027	280	-	-
NXMLE-125	125	0.65	40	48	54
NXMLE-160(W125)	160	0.5	48	56	68
NXMLE-250	250	0.4	55	64	74
NXMLE-400	400	0.15	103	112	162
NXMLE-630	630	0.11	170	160(520A)	180(520A)
NXMLE-800	800	0.09	220	180(720A)	200(720A)
NXHM-63	63	1.8	21	25	28
NXHM-125	125	0.6	36	44	51
NXHM-160	160	0.42	38	45	53
NXHM-250	250	0.35	47	55	65
NXHM-400	400	0.13	88	95	145
NXHM-630	630	0.09	178	140(520A)	152(520A)
NXHM-800	800	0.07	200	160(720A)	180(720A)
NXHM-1000	1000	0.058	250	280(920A)	310(920A)

Parameter table of connecting cable/copper bar

The reference section of connecting cable/copper bar with different rated current is as follows.

Rated current (A)	Section of wire (mm ²)
10	1.5
16, 20	2.5
25	4.0
32	6.0
40, 50	10
63	16
80	25
100	35
125, 140	50
160	70
180, 200, 225	95
250	120
280, 315, 320, 350	185
400	240

Rated current (A)	Cable		Copper bar	
	Section (mm ²)	Quantity	Width × thickness (mm)	Quantity
500	150	2	30×5	2
630	185	2	40×5	2
700, 800	240	2	50×5	2
			50×10	1
900, 1000	-	-	50×5	3
			63×10	1
1250	-	-	50×5	3
			40×10	2
1600	-	-	60×5	4
			60×10	2

The above reference section is the reference value under 40 degrees operating environmental temperature.

The recommended value of tightening torque of different housing current connecting cable/copper bar is as follows:

Rated current (A)	63A/125A	160A(W125)	250A/320A	400A/630A	800A(W630)	1000A(W800)	1250A/1600A
Torque (N m) ⁽¹⁾	3/6 ⁽⁴⁾	10	12	30	40	40	30
Torque (N m) ⁽²⁾	3/6 ⁽⁴⁾	10	12	30	40	40	30
Torque (N m) ⁽³⁾	3/6 ⁽⁴⁾	10	12	30	40	40	30

¹⁾ Tighten the torque of busbar (or extension busbar/connection lug) in case of connecting with the body directly.

²⁾ Tighten the torque of connecting terminal behind the stationary breaker/tighten the torque of connecting terminal of plug in breaker.

³⁾ Tighten the torque of extension busbar of terminal on the plug-in pedestal.

⁴⁾ Value of torque is 3 for 10A~63A of frame current 63 and 125A breaker, value of torque is 6 for 70A~125A for frame current 125A breaker.

Cascading (AC380/400/415V)

[illegible]

Type	In	Icu	Ics	Pole NO.	description	code
Thermomagnetic	400A	50KA	36KA	4	NXM-400S/4300B 400A	844367
	400A	36KA	36KA	3	NXM-630F/3300 400A	947490
	400A	36KA	36KA	4	NXM-630F/4300B 400A	947493
	400A	70KA	50KA	3	NXM-630H/3300 400A	844368
	400A	70KA	50KA	4	NXM-630H/4300B 400A	844371
	400A	50KA	36KA	3	NXM-630S/3300 400A	844374
	400A	50KA	36KA	4	NXM-630S/4300B 400A	844375
	450A	50KA	36KA	3	NXM-630S/3300 450A	379117
	500A	36KA	36KA	3	NXM-630F/3300 500A	947491
	500A	36KA	36KA	4	NXM-630F/4300B 500A	947494
	500A	70KA	50KA	3	NXM-630H/3300 500A	844369
	500A	70KA	50KA	4	NXM-630H/4300B 500A	844372
	500A	50KA	36KA	3	NXM-630S/3300 500A	131374
	500A	50KA	36KA	4	NXM-630S/4300B 500A	844376
	600A	36KA	36KA	3	NXM-630E/3300 600A	309499
	600A	36KA	36KA	4	NXM-630E/4300B 600A	309653
	600A	36KA	36KA	3	NXM-630F/3300 600A	309500
	600A	36KA	36KA	4	NXM-630F/4300B 600A	309502
	600A	70KA	50KA	3	NXM-630H/3300 600A	309501
	600A	70KA	50KA	4	NXM-630H/4300B 600A	309504
	600A	50KA	36KA	3	NXM-630S/3300 600A	309515
	600A	50KA	36KA	4	NXM-630S/4300B 600A	309503
	630A	36KA	36KA	3	NXM-630F/3300 630A	947492
	630A	36KA	36KA	4	NXM-630F/4300B 630A	947495
	630A	70KA	50KA	3	NXM-630H/3300 630A	844370
	630A	70KA	50KA	4	NXM-630H/4300B 630A	844373
	630A	50KA	36KA	3	NXM-630S/3300 630A	131375
	630A	50KA	36KA	4	NXM-630S/4300B 630A	844377
	630A	50KA	50KA	3	NXM-800F/3300 630A	203792
	630A	50KA	50KA	4	NXM-800F/4300B 630A	507878
	630A	70KA	50KA	3	NXM-800H/3300 630A	844378
	630A	70KA	50KA	4	NXM-800H/4300B 630A	844380
	630A	50KA	36KA	3	NXM-800S/3300 630A	844382
	630A	50KA	36KA	4	NXM-800S/4300B 630A	844383
	700A	50KA	50KA	3	NXM-800F/3300 700A	203793
	700A	50KA	50KA	4	NXM-800F/4300B 700A	507879
	700A	50KA	36KA	3	NXM-800S/3300 700A	328725
	800A	70KA	50KA	3	NXM-1000H/3300 800A	844277
	800A	70KA	50KA	4	NXM-1000H/4300B 800A	844279
	800A	50KA	36KA	3	NXM-1000S/3300 800A	844280
	800A	50KA	36KA	4	NXM-1000S/4300B 800A	844282